

### Features

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

### Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

<b><math>I_{T(AV)}</math></b>	<b>1500A</b>
<b><math>V_{DRM}/V_{RRM}</math></b>	<b>5600 ~ 6500V</b>
<b><math>I_{TSM}</math></b>	<b>22 kA</b>
<b><math>I^2t</math></b>	<b>2420 <math>10^3 A^2s</math></b>

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}C)$	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled, $T_C=70^{\circ}C$	125			1500	A
$V_{DRM}$ $V_{RRM}$	Repetitive peak off-state voltage Repetitive peak reverse voltage	$t_p=10ms$	125	5600		6500	V
$I_{DRM}$ $I_{RRM}$	Repetitive peak current	at $V_{DRM}$ at $V_{RRM}$	125			600	mA
$I_{TSM}$	Surge on-state current	10ms half sine wave $V_R=0.6V_{RRM}$	125			22	kA
$I^2t$	$I^2t$ for fusing coordination					2420	$A^2s \cdot 10^3$
$V_{TO}$	Threshold voltage		125			1.20	V
$r_T$	On-state slope resistance					0.628	mΩ
$V_{TM}$	Peak on-state voltage	$I_{TM}=1500A, F=40kN$	25			2.12	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			2000	V/μs
di/dt	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$ to 3000A, Gate pulse $t_r \leq 0.5\mu s$ $I_{GM}=1.5A$	125			250	A/μs
$Q_{rr}$	Recovery charge	$I_{TM}=2000A, t_p=4000\mu s, di/dt=-5A/\mu s,$ $V_R=100V$	125		3500		μC
$I_{GT}$	Gate trigger current	$V_A=12V, I_A=1A$	25	40		300	mA
$V_{GT}$	Gate trigger voltage			0.8		3.0	V
$I_H$	Holding current			25		200	mA
$I_L$	Latching current					1000	mA
$V_{GD}$	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125			0.3	V
$R_{th(j-c)}$	Thermal resistance Junction to case	D.C. double side cooled Clamping force 40.0kN				0.010	$^{\circ}C/W$
$R_{th(c-h)}$	Thermal resistance case to heatsink					0.003	$^{\circ}C/W$
$F_m$	Mounting force			35	40	47	kN
$T_{vj}$	Junction temperature			-40		125	$^{\circ}C$
$T_{stg}$	Stored temperature			-40		140	$^{\circ}C$
$W_t$	Weight				880		g
Outline	P14						

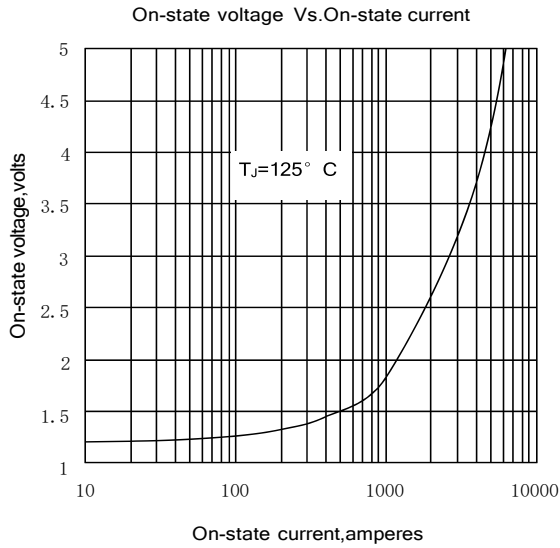


Fig.1

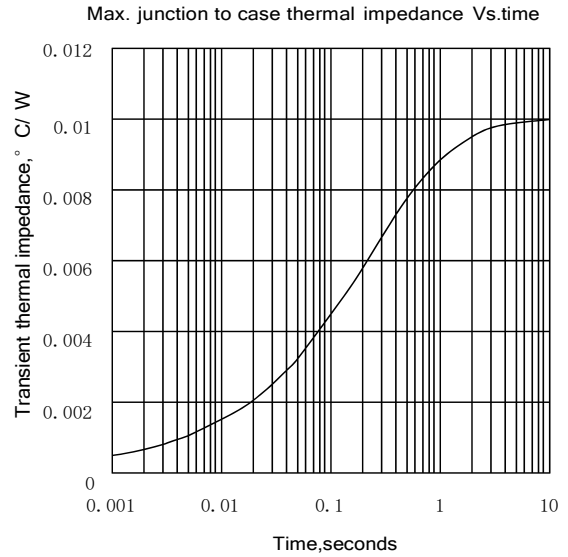


Fig.2

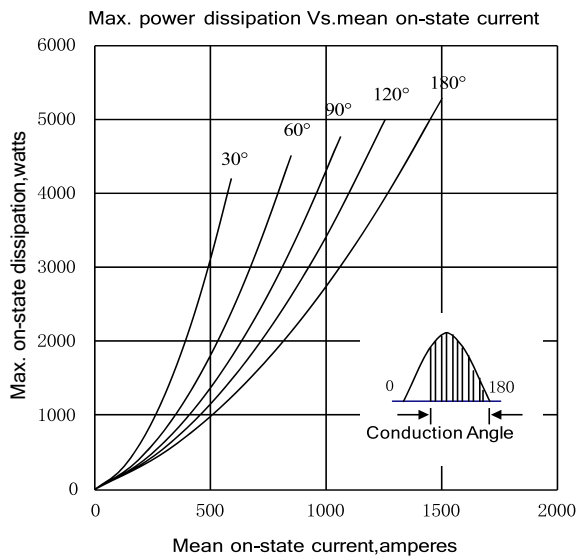


Fig.3

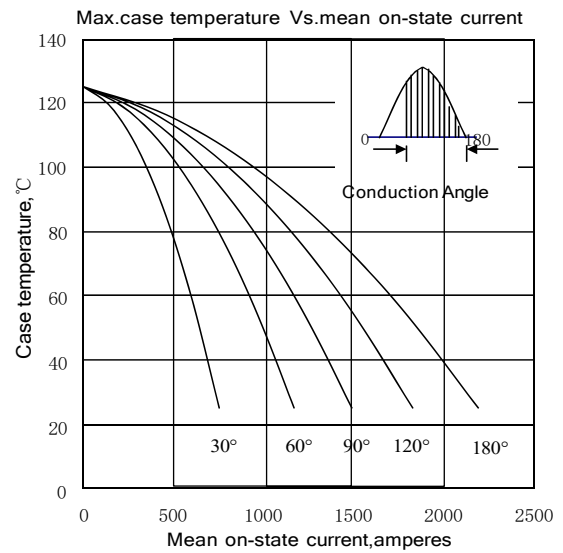


Fig.4

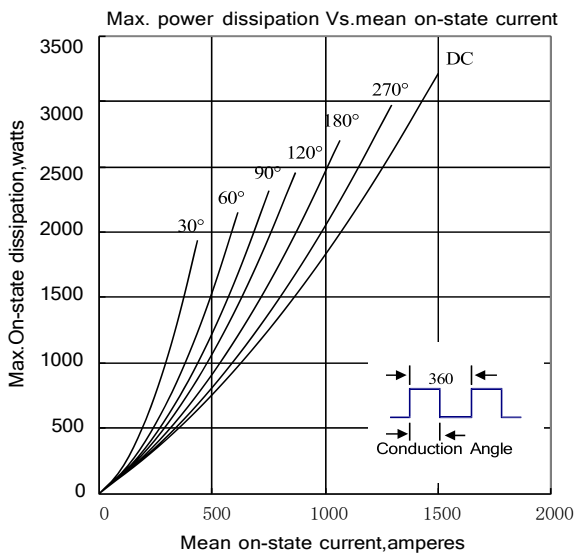


Fig.5

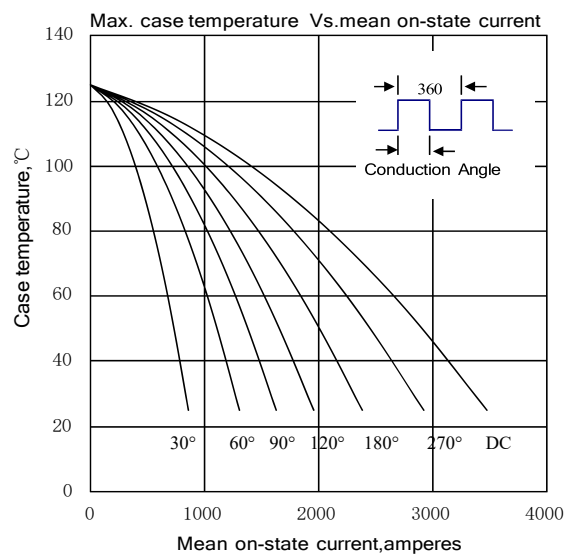


Fig.6

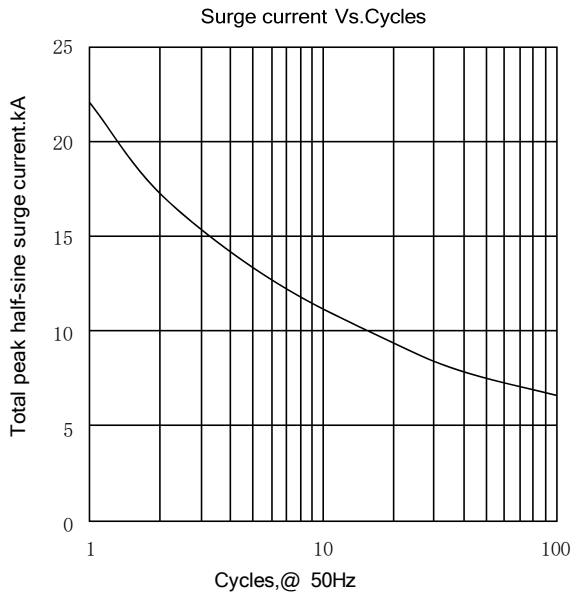


Fig.7


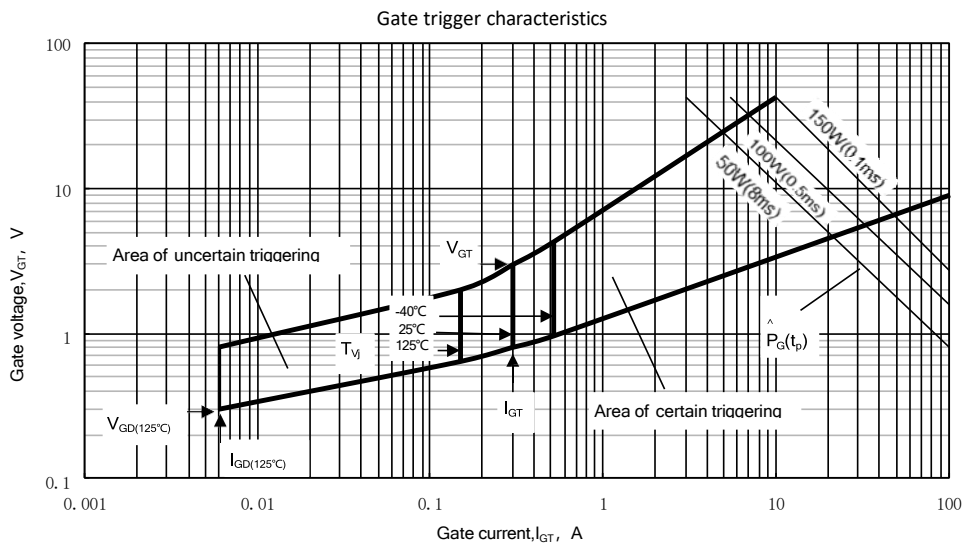


Fig.8

Outline:

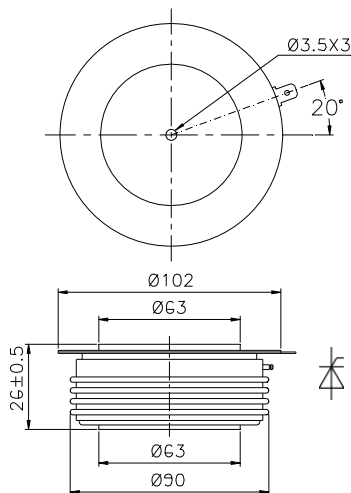

Nlps reserves the right to change specifications without notice.