

Features :

- Isolated mounting base 3000V~
- Solder joint technology with increased power cycling capability
- Space and weight saving

Typical Applications

- AC/DC Motor drives
- Various rectifiers
- DC supply for PWM inverter

| V_{DSM}, V_{RSM} | V_{DRM}, V_{RRM} | Type |
|--------------------|--------------------|------------|
| 900V | 800V | Mx160T80S |
| 1100V | 1000V | Mx160T100S |
| 1300V | 1200V | Mx160T120S |
| 1500V | 1400V | Mx160T140S |
| 1700V | 1600V | Mx160T160S |
| 1900V | 1800V | Mx160T180S |

| SYMBOL | CHARACTERISTIC | TEST CONDITIONS | $T_J(^{\circ}\text{C})$ | VALUE | | | UNIT |
|------------------------|--|--|-------------------------|-------|------|------|----------------------------------|
| | | | | Min | Type | Max | |
| $I_{T(AV)}$ | Mean on-state current | 180° half sine wave 50Hz Single side cooled, $T_c=85^{\circ}\text{C}$ | 125 | | | 160 | A |
| $I_{T(RMS)}$ | RMS on-state current | | 125 | | | 251 | A |
| I_{DRM} I_{RRM} | Repetitive peak current | at V_{DRM} at V_{RRM} | 125 | | | 40 | mA |
| I_{TSM} | Surge on-state current | 10ms half sine wave $V_R=60\%V_{RRM}$ | 125 | | | 3.8 | kA |
| I^{2t} | I^{2t} for fusing coordination | | | | | 72.2 | $\text{A}^2\text{s} \times 10^3$ |
| V_{TO} | Threshold voltage | | 125 | | | 0.85 | V |
| r_T | On-state slope resistance | | | | | 1.50 | $\text{m}\Omega$ |
| V_{TM} | Peak on-state voltage | $I_{TM}=480\text{A}$ | 25 | | | 1.65 | V |
| dv/dt | Critical rate of rise of off-state voltage | $V_{DM}=67\%V_{DRM}$ | 125 | | | 1000 | $\text{V}/\mu\text{s}$ |
| di/dt | Critical rate of rise of on-state current | Gate source 1.5A $t_r \leq 0.5\mu\text{s}$ Repetitive | 125 | | | 200 | $\text{A}/\mu\text{s}$ |
| I_{GT} | Gate trigger current | $V_A=12\text{V}$, $I_A=1\text{A}$ | 25 | 30 | | 200 | mA |
| V_{GT} | Gate trigger voltage | | | 0.6 | | 2.5 | V |
| I_H | Holding current | | | 10 | | 250 | mA |
| V_{GD} | Non-trigger gate voltage | $V_{DM}=67\%V_{DRM}$ | 125 | 0.2 | | | V |
| $R_{th(j-c)}$ | Thermal resistance Junction to case | Single side cooled per chip | | | | 0.17 | $^{\circ}\text{C}/\text{W}$ |
| $R_{th(c-h)}$ | Thermal resistance case to heatsink | Single side cooled per chip | | | | 0.08 | $^{\circ}\text{C}/\text{W}$ |
| V_{iso} | Isolation voltage | 50Hz,R.M.S., $t=1\text{min}$, $I_{iso}=1\text{mA}(\text{MAX})$ | | 3000 | | | V |
| F_m | Terminal connection torque(M6) | | | | 6.0 | | $\text{N}\cdot\text{m}$ |
| | Mounting torque(M6) | | | | 6.0 | | $\text{N}\cdot\text{m}$ |
| T_{stg} | Stored temperature | | | -40 | | 125 | $^{\circ}\text{C}$ |
| W_t | Weight | | | | 150 | | g |
| Outline | | | | M17 | | | |

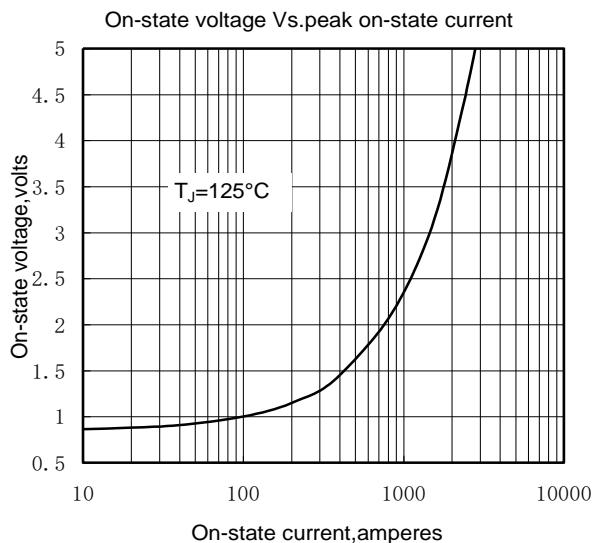


Fig1

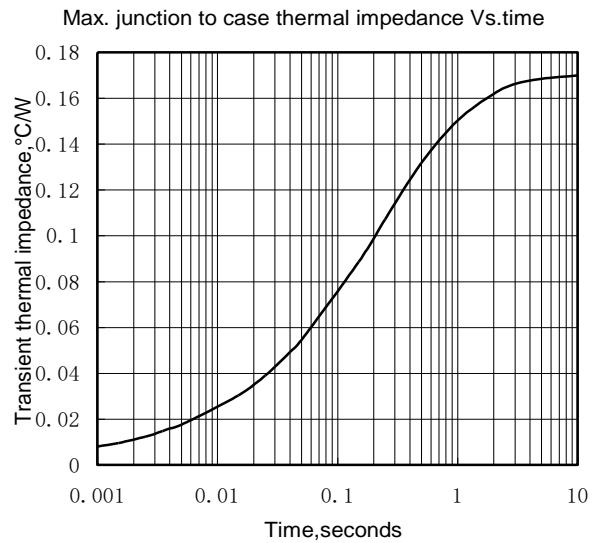


Fig2

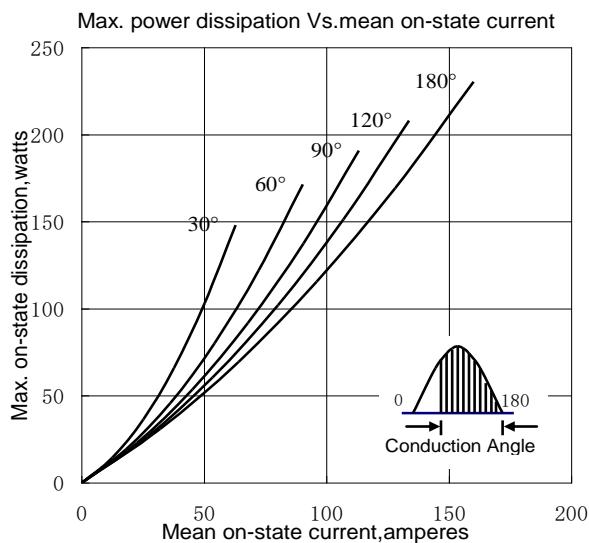


Fig3

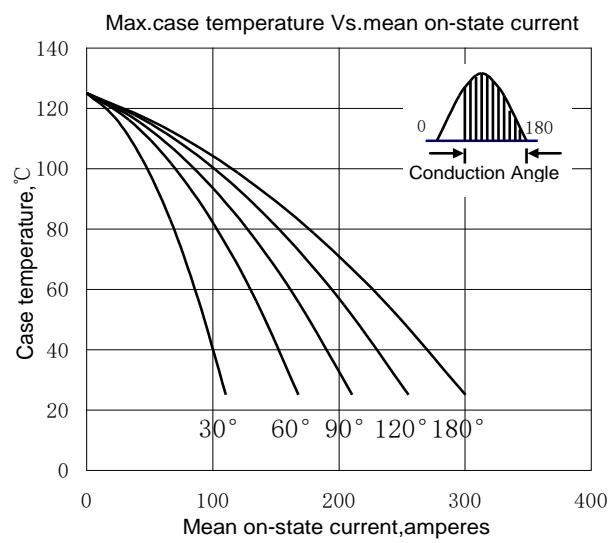


Fig4

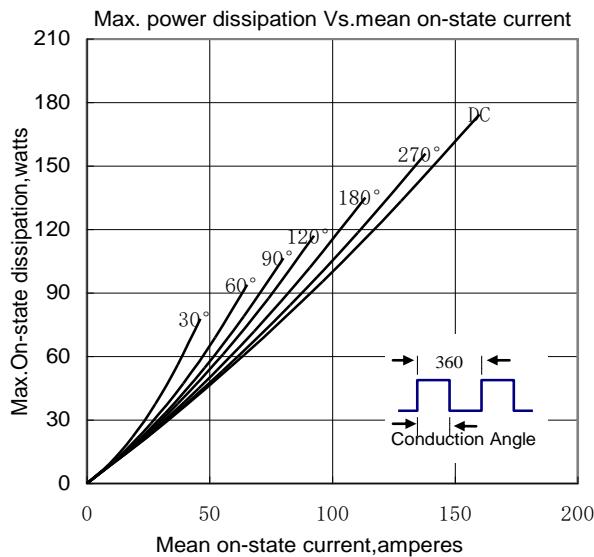


Fig5

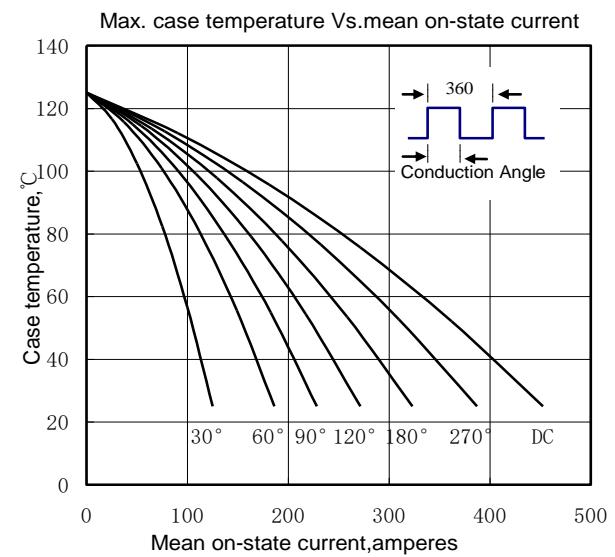


Fig6

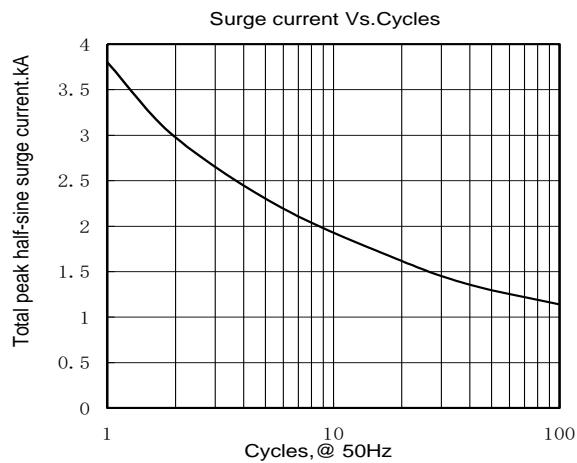


Fig7

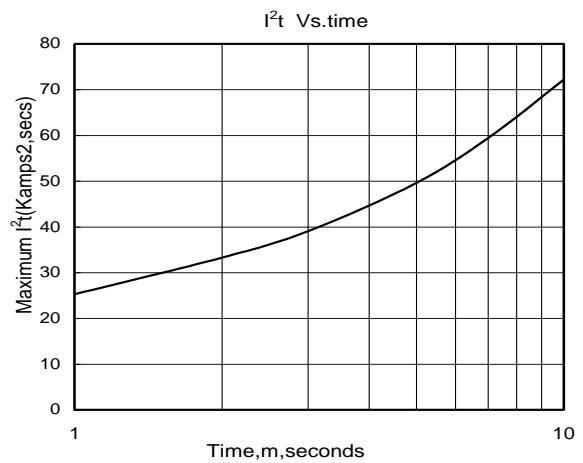


Fig8

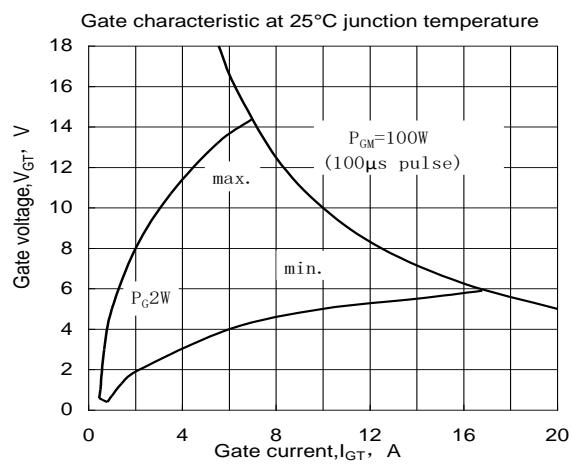


Fig9



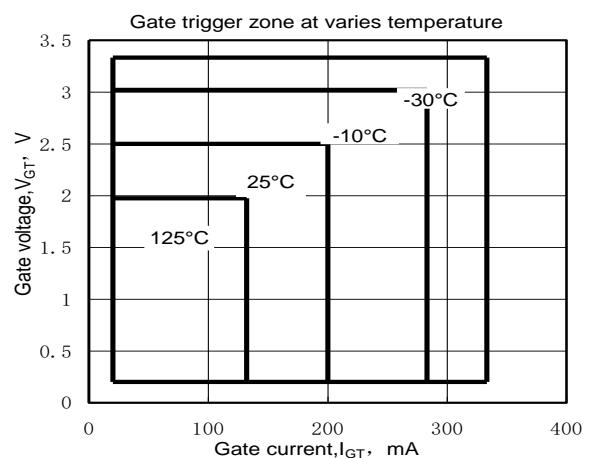


Fig10

Outline:

MD160T*S

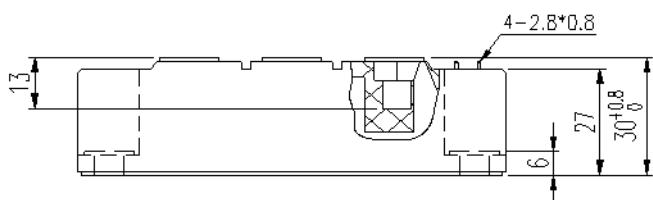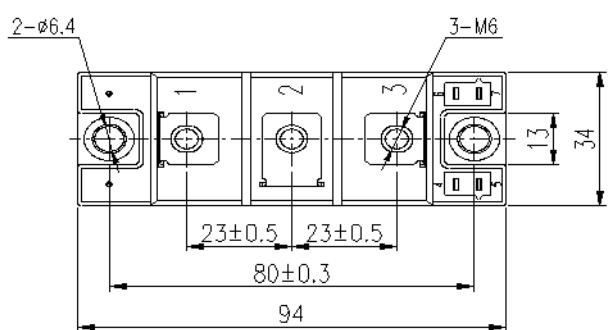

MH160T*S

