

**Features :**

- Isolated mounting base 3000V~
- Pressure contact technology with Increased power cycling capability
- Space and weight saving

**Typical Applications**

- AC/DC Motor drives
- DC supply for PWM inverter

$V_{RSM}$	$V_{RRM}$	Type
2100V	2000V	Mx90D200
2300V	2200V	Mx90D220
2600V	2500V	Mx90D250

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}C)$	VALUE			UNIT
				Min	Type	Max	
$I_{F(AV)}$	Mean forward current	180° half sine wave 50Hz Single side cooled, $T_C=100^{\circ}C$	150			90	A
$I_{F(RMS)}$	RMS forward current		150			141	A
$I_{RRM}$	Repetitive peak current	at $V_{RRM}$	150			8	mA
$I_{FSM}$	Surge forward current	10ms half sine wave $V_R=0.6V_{RRM}$	150			2.3	kA
$I^2t$	$I^2t$ for fusing coordination					26	$A^2s \cdot 10^3$
$V_{FO}$	Threshold voltage		150			0.85	V
$r_F$	Forward slope resistance					1.88	m $\Omega$
$V_{FM}$	Peak forward voltage	$I_{FM}=270A$	25			1.43	V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine Single side cooled				0.45	$^{\circ}C/W$
$R_{th(c-h)}$	Thermal resistance case to heatsink	At 180° sine Single side cooled				0.20	$^{\circ}C/W$
$V_{iso}$	Isolation voltage	50Hz, R.M.S, $t=1min, I_{iso}: 1mA(max)$		3000			V
$F_m$	Terminal connection torque(M5)				4.0		N·m
	Mounting torque(M6)				6.0		N·m
$T_{vj}$	Junction temperature			-40		150	$^{\circ}C$
$T_{stg}$	Stored temperature			-40		125	$^{\circ}C$
$W_t$	Weight				170		g
Outline	M01						

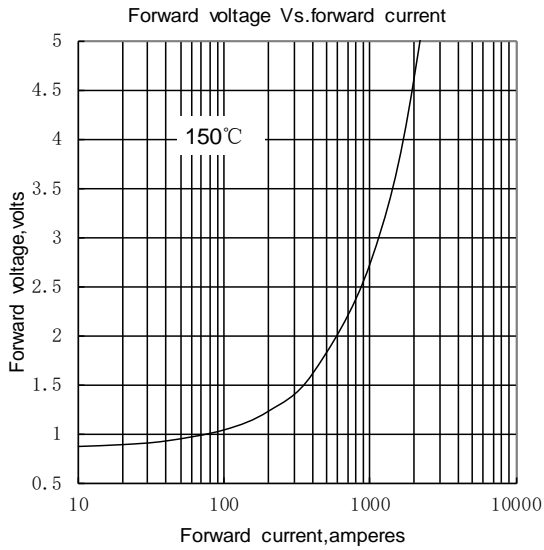


Fig.1

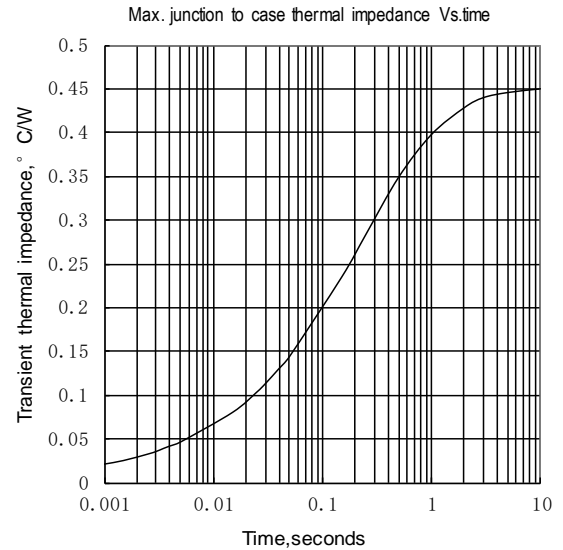


Fig.2

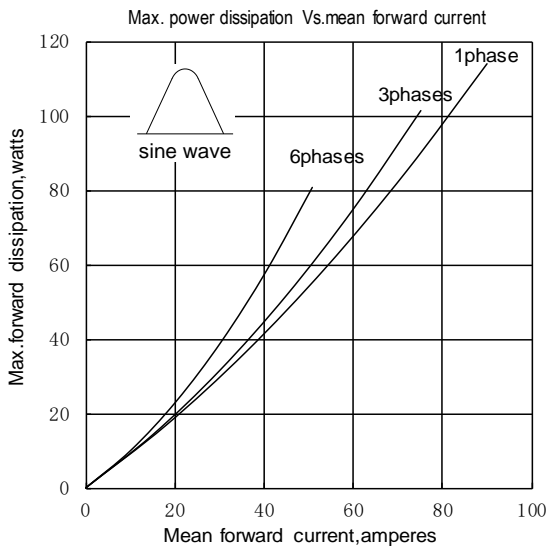


Fig.3

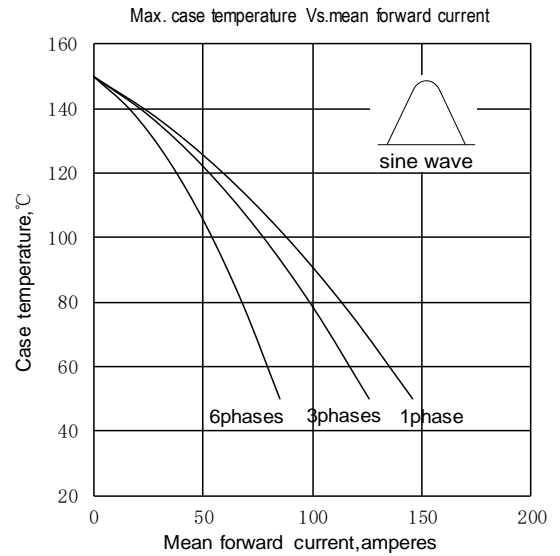


Fig.4

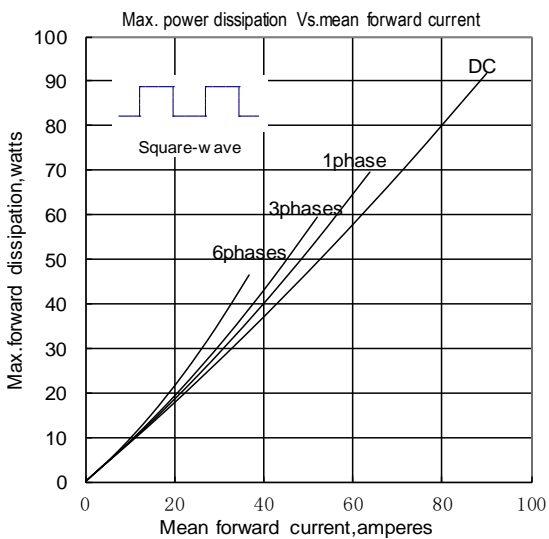


Fig.5

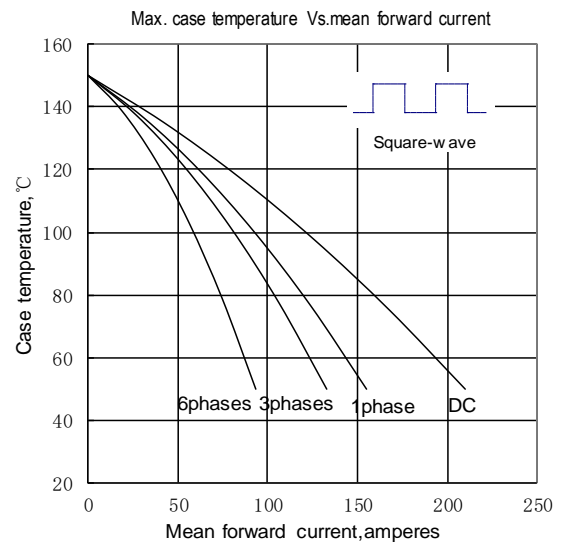


Fig.6

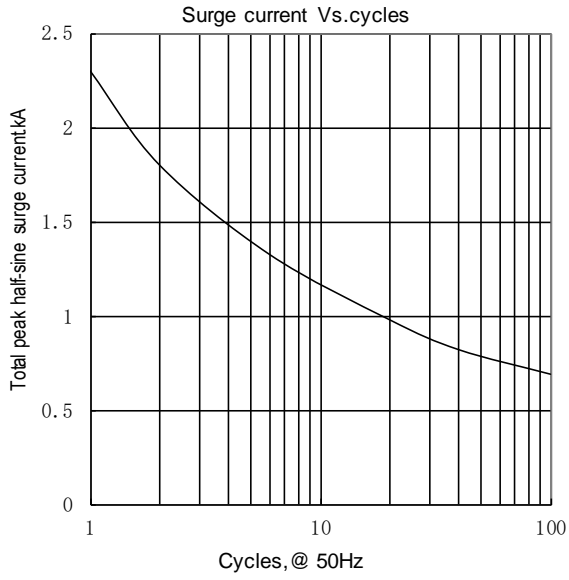


Fig.7



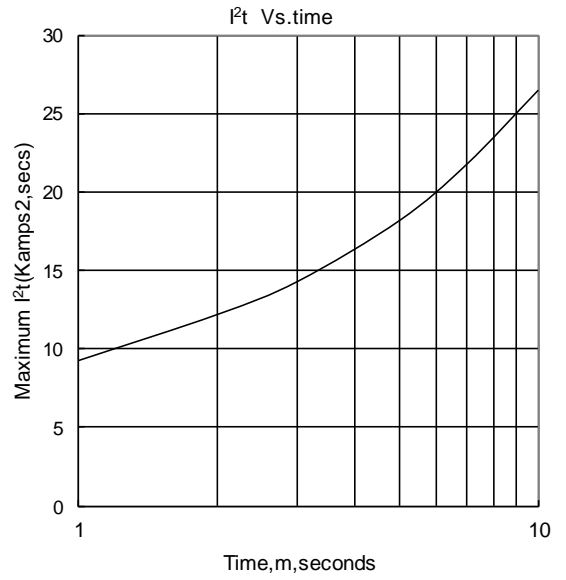


Fig.8


Outline:

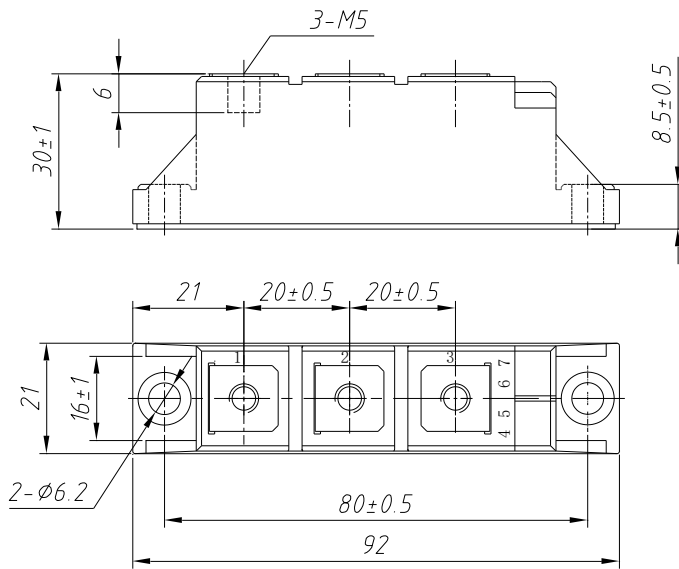


MD90D



MR90D



MC90D



MH90D

