

#### Features

- Low forward voltage drop
- High reverse voltage
- Hermetic metal cases with ceramic insulators

#### Typical Applications

- All purpose high power rectifier diodes
- High power resistance welding equipment
- Non-controllable and half-controllable rectifiers
- Controlled rectifiers

$I_{F(AV)}$	<b>1640 A</b>
$V_{RRM}$	<b>4300-5000 V</b>
$I_{FSM}$	<b>14 kA</b>
$I^2t$	<b>980 10<sup>3</sup>A<sup>2</sup>S</b>



SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}C)$	VALUE			UNIT
				Min	Type	Max	
$I_{F(AV)}$	Mean forward current	180° half sine wave 50Hz Double side cooled, $T_C=85^{\circ}C$	150			1640	A
$V_{RRM}$	Repetitive peak reverse voltage	$t_p=10ms$	150	4300		5000	V
$I_{RRM}$	Repetitive peak current	at $V_{RRM}$	150			100	mA
$I_{FSM}$	Surge forward current	10ms half sine wave	150			14	kA
$I^2t$	$I^2t$ for fusing coordination	$V_R=0.6V_{RRM}$				980	A <sup>2</sup> s*10 <sup>3</sup>
$V_{FO}$	Threshold voltage		150			0.98	V
$r_F$	Forward slope resistance					0.25	mΩ
$V_{FM}$	Peak forward voltage	$I_{FM}=1500A, F=26kN$	150			1.36	V
$Q_{rr}$	Recovery charge	$I_{FM}=2000A, t_p=2000\mu s, di/dt=-20A/\mu s, V_R=50V$	150		4000		μC
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine- double side cooled Clamping force 26kN				0.020	°C /W
$R_{th(c-h)}$	Thermal resistance case to heatsink					0.005	
$F_m$	Mounting force			19		26	kN
$T_{stg}$	Stored temperature			-40		160	°C
$W_t$	Weight				440		g
Outline							

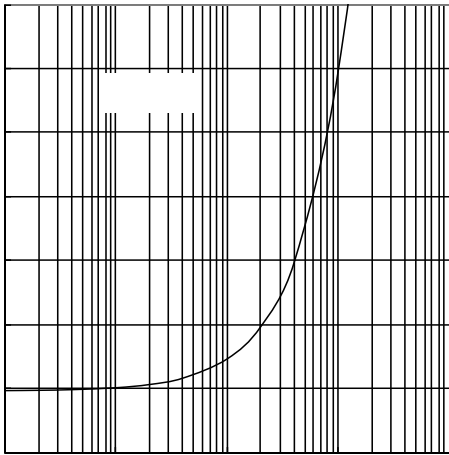


Fig.1

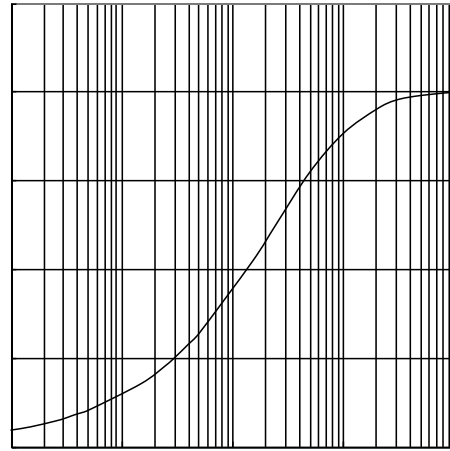


Fig.2

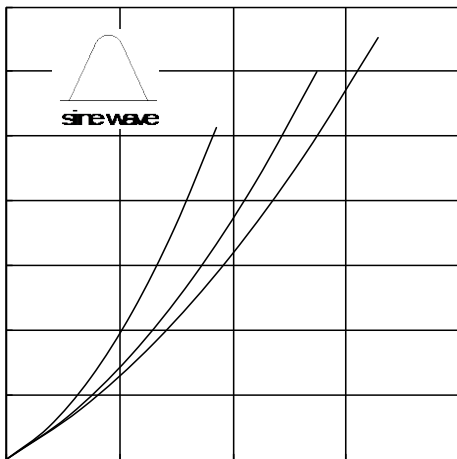


Fig.3

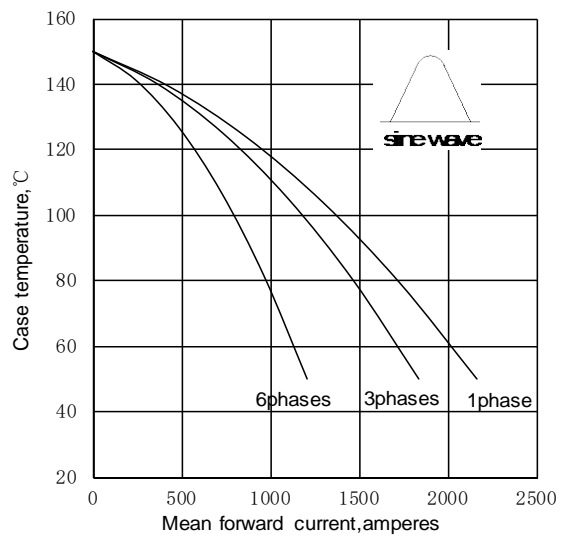


Fig.4

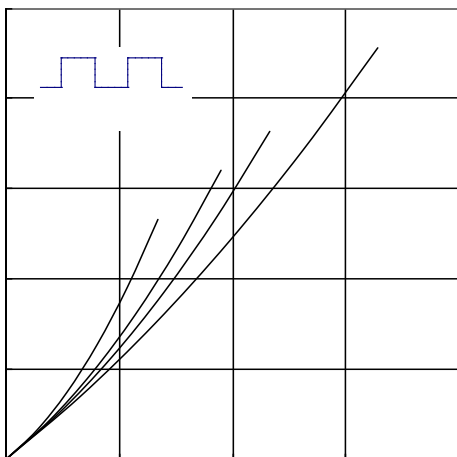


Fig.5

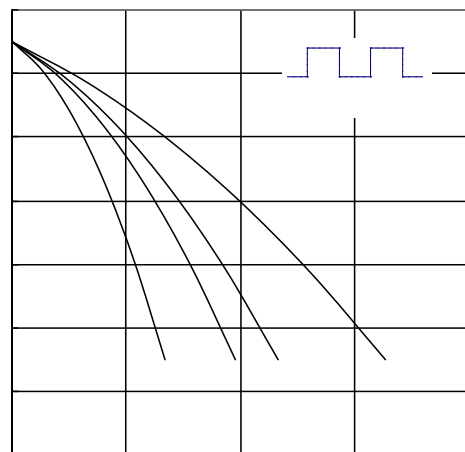


Fig.6

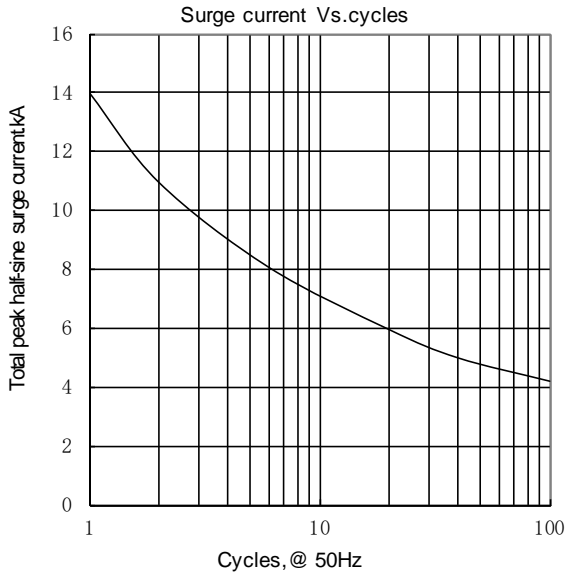


Fig.7

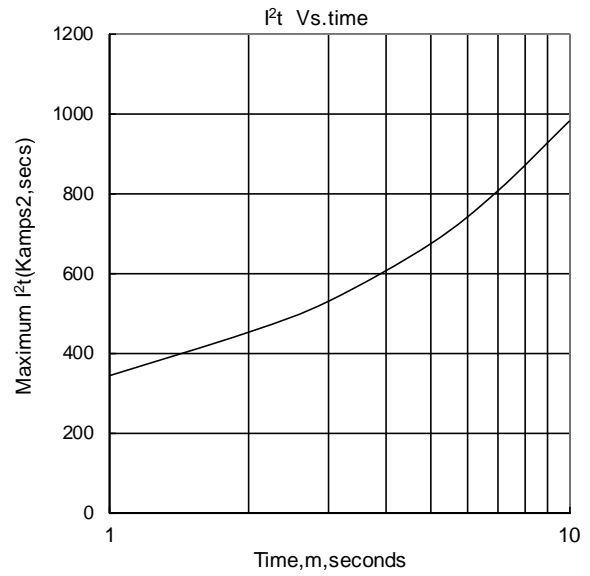


Fig.8

Outline:

