

#### Features

- Low forward voltage drop
- High reverse voltage
- Hermetic metal cases with ceramic insulators

#### Typical Applications

- All purpose high power rectifier diodes
- High power resistance welding equipment
- Non-controllable and half-controllable rectifiers
- Controlled rectifiers

$I_{F(AV)}$	<b>3520A</b>
$V_{RRM}$	<b>1100~2000 V</b>
$I_{FSM}$	<b>34 kA</b>
$I^2t$	<b>5780 10<sup>3</sup>A<sup>2</sup>S</b>



SYMBOL	CHARACTERISTIC	TEST CONDITIONS		$T_j(^{\circ}\text{C})$	VALUE			UNIT
					Min	Type	Max	
$I_{F(AV)}$	Mean forward current	180° half sine wave 50Hz Double side cooled,	$T_c=85^{\circ}\text{C}$	175			3520	A
$V_{RRM}$	Repetitive peak reverse voltage	tp=10ms		175	1100		2000	V
$I_{RRM}$	Repetitive peak current	At $V_{RRM}$		175			120	mA
$I_{FSM}$	Surge forward current	10ms half sine wave		175			34	kA
$I^2t$	$I^2t$ for fusing coordination	$V_R=0.6V_{RRM}$					5780	A <sup>2</sup> s*10 <sup>3</sup>
$V_{FO}$	Threshold voltage			175			0.73	V
$r_F$	Forward slope resistance						0.10	mΩ
$V_{FM}$	Peak forward voltage	$I_{FM}=4000\text{A}$ , $F=28\text{kN}$		175			1.13	V
$Q_{rr}$	Recovery charge	$I_{FM}=2000\text{A}$ , $t_p=2000\mu\text{s}$ , $di/dt=-20\text{A}/\mu\text{s}$ , $V_R=50\text{V}$		175		5000		μC
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 28kN					0.016	°C /W
$R_{th(c-h)}$	Thermal resistance case to heat sink					0.004		
$F_m$	Mounting force				21		30	kN
$T_{stg}$	Stored temperature				-40		175	°C
$W_t$	Weight					640		g
Outline								

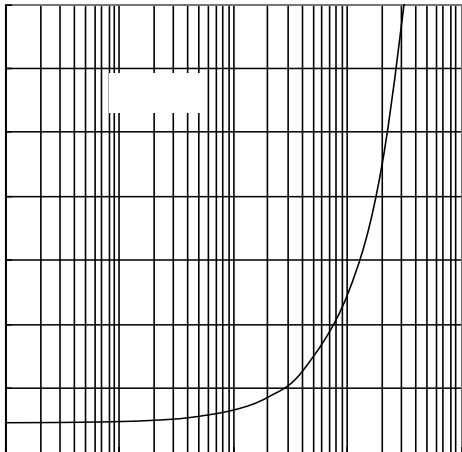


Fig.1

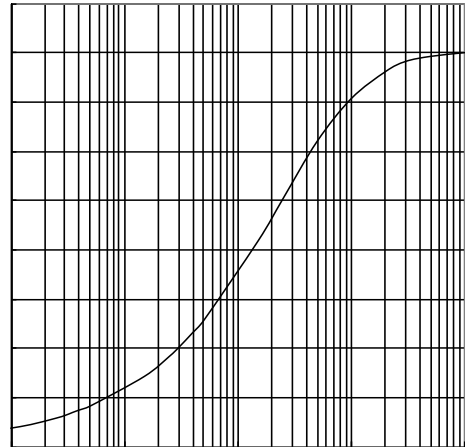


Fig.2

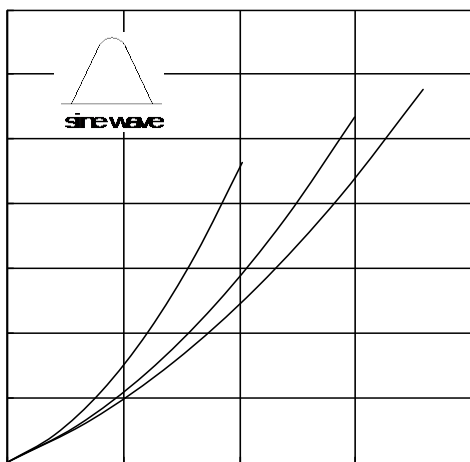


Fig.3

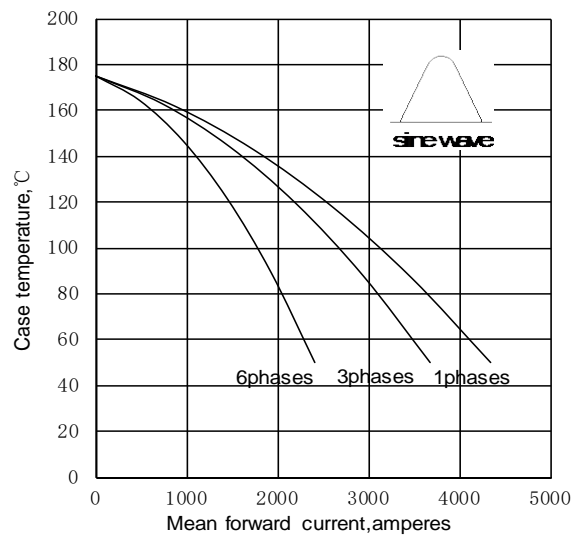


Fig.4

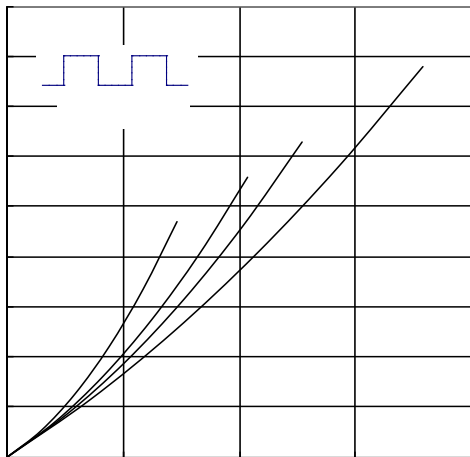


Fig.5

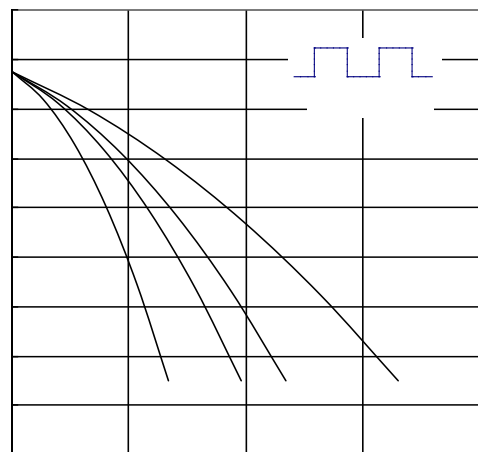


Fig.6

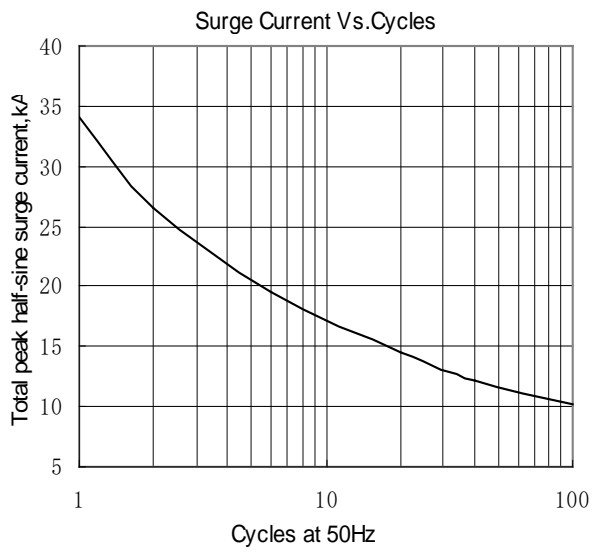


Fig.7

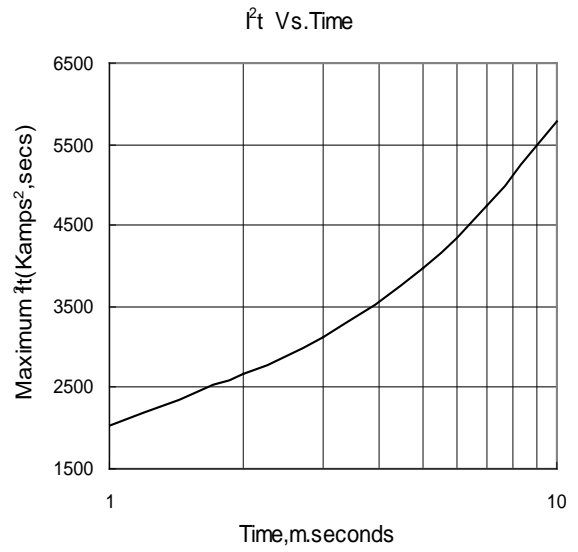


Fig.8

Outline:

