

Features

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

$I_{T(AV)}$ **5010 A**
 V_{DRM}/V_{RRM} **4500-5500V**
 I_{TSM} **72 kA**
 I^2t **25920 10³A²S**



| SYMBOL | CHARACTERISTIC | TEST CONDITIONS | | T _j (°C) | VALUE | | | UNIT |
|------------------------|--|---|----------------------|---------------------|-------|------|-------|----------------------------------|
| | | | | | Min | Type | Max | |
| $I_{T(AV)}$ | Mean on-state current | 180° half sine wave 50Hz Double side cooled, | T _C =70°C | 125 | | | 5010 | A |
| V_{DRM} V_{RRM} | Repetitive peak off-state voltage Repetitive peak reverse voltage | tp=10ms | | 125 | 4500 | | 5500 | V |
| I_{DRM} I_{RRM} | Repetitive peak current | at V _{DRM} at V _{RRM} | | 125 | | | 600 | mA |
| I_{TSM} | Surge on-state current | 10ms half sine wave | | 125 | | | 72 | kA |
| I^2t | I ² t for fusing coordination | V _R =0.6V _{RRM} | | | | | 25920 | A ² s*10 ³ |
| V_{TO} | Threshold voltage | | | 125 | | | 1.02 | V |
| r_T | On-state slope resistance | | | | | | 0.14 | mΩ□ |
| V_{TM} | Peak on-state voltage | I _{TM} =3000A, F=120kN | | 125 | | | 1.50 | V |
| dv/dt | Critical rate of rise of off-state voltage | V _{DM} =0.67V _{DRM} | | 125 | | | 2000 | V/μs |
| di/dt | Critical rate of rise of on-state current | V _{DM} = 67%V _{DRM} to 3000A, Gate pulse tr ≤0.5μs IGM= 1.5A | | 125 | | | 250 | A/μs |
| Q_{rr} | Recovery charge | I _{TM} =2000A, tp=2000μs, di/dt=-5A/μs, V _R =50V | | 125 | | 5500 | | μC |
| I_{GT} | Gate trigger current | | | 25 | 30 | | 300 | mA |
| V_{GT} | Gate trigger voltage | V _A =12V, I _A =1A | | | 0.8 | | 3.0 | V |
| I_H | Holding current | | | | 25 | | 250 | mA |
| V_{GD} | Non-trigger gate voltage | V _{DM} =67%V _{DRM} | | 125 | 0.3 | | | V |
| $R_{th(j-c)}$ | Thermal resistance Junction to case | At 180° sine double side cooled Clamping force 120.0kN | | | | | 0.004 | °C/W |
| $R_{th(c-hs)}$ | Thermal resistance case to heatsink | | | | | | 0.001 | °C/W |
| F_m | Mounting force | | | | 110 | | 140 | kN |
| T_{stg} | Stored temperature | | | | -40 | | 140 | °C |
| W_t | Weight | | | | | 3420 | | g |
| Outline | | | | | | | | |

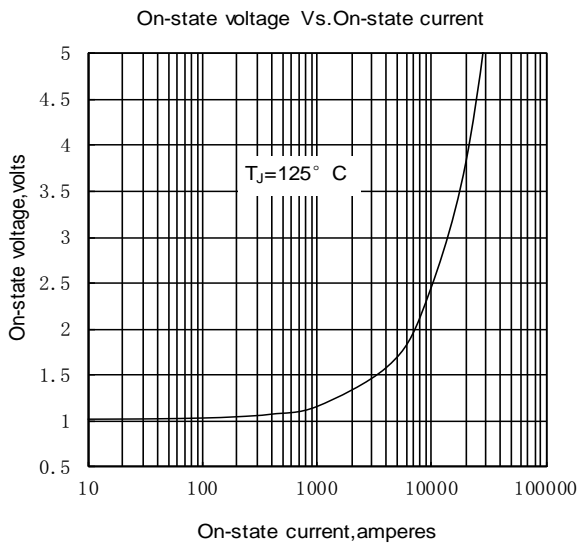


Fig. 1

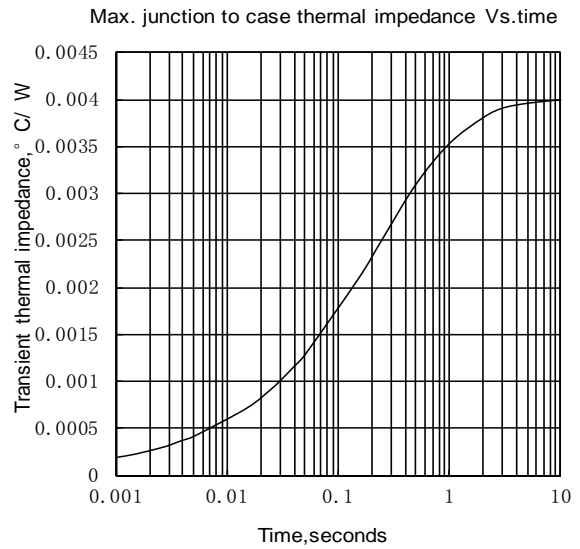


Fig. 2

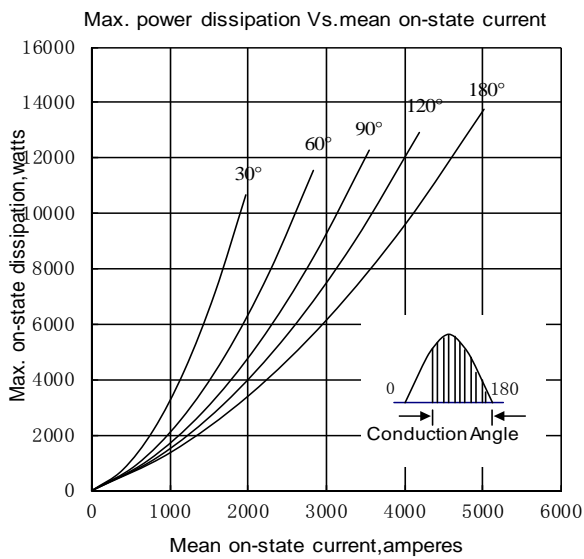


Fig. 3

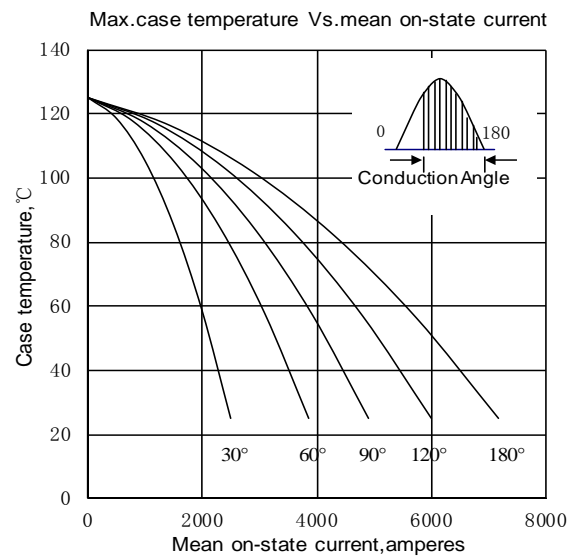


Fig. 4

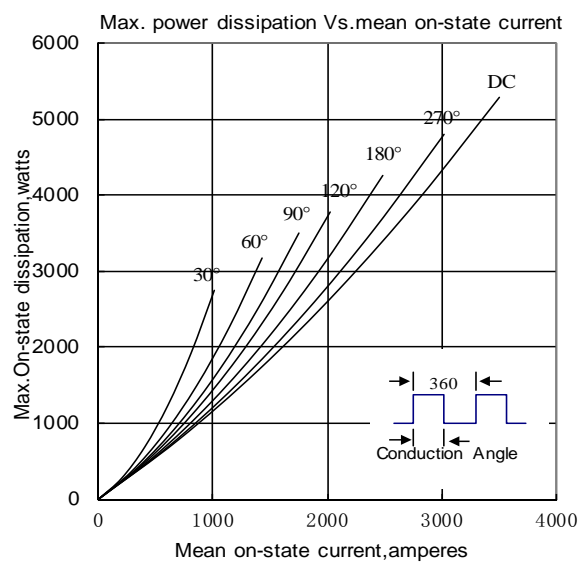


Fig. 5

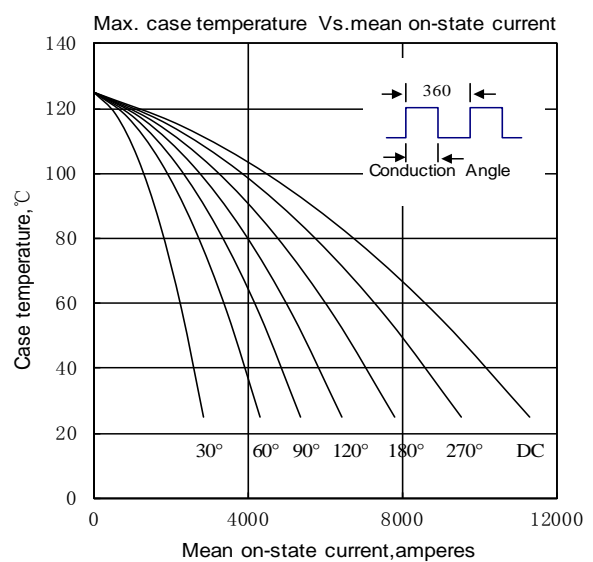


Fig. 6

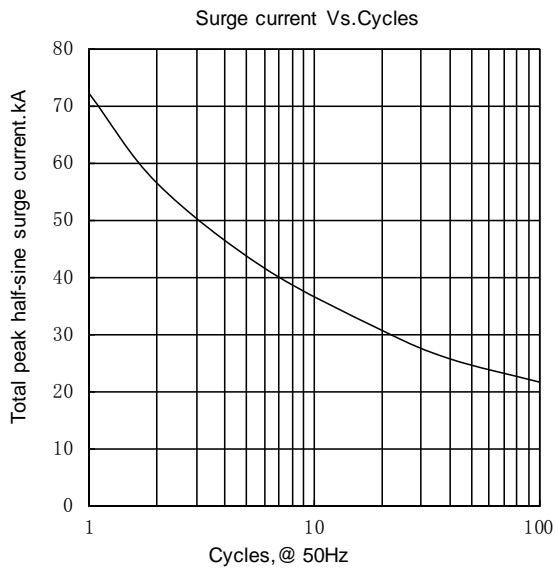


Fig.7

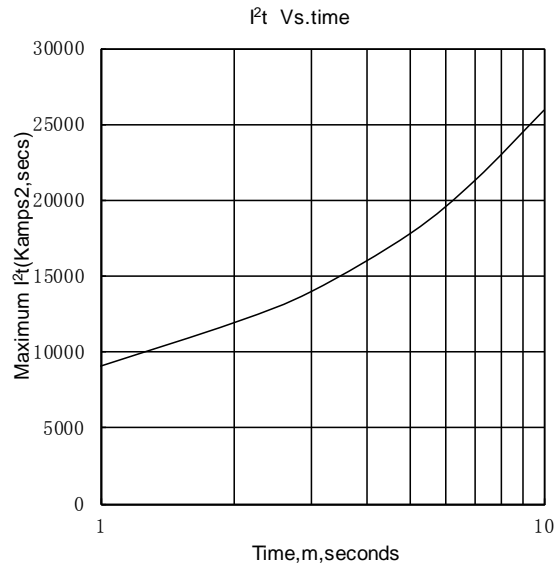


Fig.8

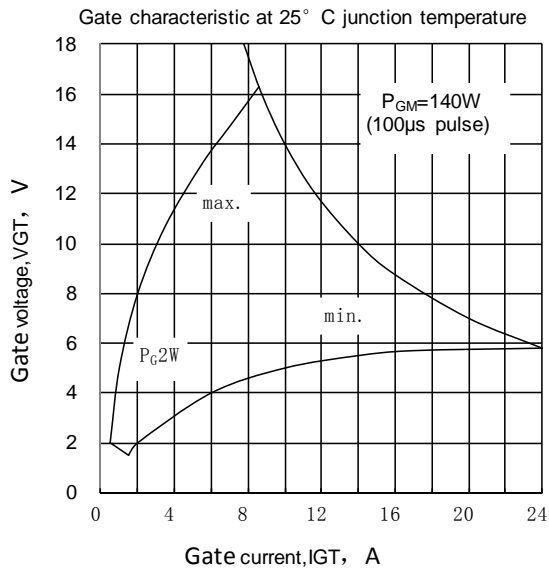


Fig.9

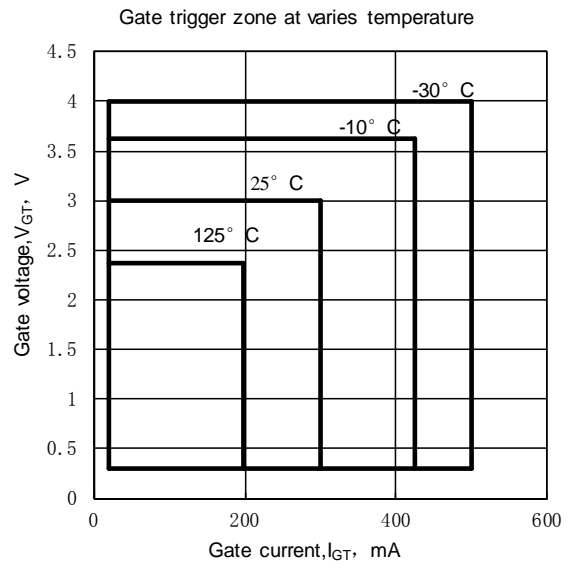


Fig.10

Outline:

