

Features

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

$I_{T(AV)}$ **720 A**
 V_{DRM}/V_{RRM} **5600-6500V**
 I_{TSM} **11.8 kA**
 I^2t **696 10³A²S**



SYMBOL	CHARACTERISTIC	TEST CONDITIONS		T _J (°C)	VALUE			UNIT
					Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled,	T _C =70°C	125			720	A
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	tp=10ms		125	5600		6500	V
I_{DRM} I_{RRM}	Repetitive peak current	at V_{DRM} at V_{RRM}		125			200	mA
I_{TSM}	Surge on-state current	10ms half sine wave		125			11.8	kA
I^2t	I^2t for fusing coordination	$V_R=0.6V_{RRM}$						696
V_{TO}	Threshold voltage			125			1.25	V
r_T	On-state slope resistance							1.03
V_{TM}	Peak on-state voltage	$I_{TM}=1000A, F=24kN$		125			2.40	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$		125			2000	V/μs
di/dt	Critical rate of rise of on-state current	$V_{DM}= 67\%V_{DRM}$ to 2000A, Gate pulse tr ≤0.5μs $I_{GM}=2.0A$		125			100	A/μs
Q_{rr}	Recovery charge	$I_{TM}=2000A, tp=2000μs, di/dt=-5A/μs,$ $V_R =50V$		125		2500		μC
I_{GT}	Gate trigger current			25	40		300	mA
V_{GT}	Gate trigger voltage	$V_A=12V, I_A=1A$			0.8		3.0	V
I_H	Holding current				25		200	mA
I_L	Latching current			25			1000	mA
V_{GD}	Non-trigger gate voltage	$V_{DM}=0.67V_{DRM}$		125	0.3			V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 24.0kN					0.022	°C/W
$R_{th(c-h)}$	Thermal resistance case to heatsink							0.005
F_m	Mounting force				19	24	26	kN
T _{stg}	Stored temperature				-40		140	°C
W_t	Weight					560		g
Outline								

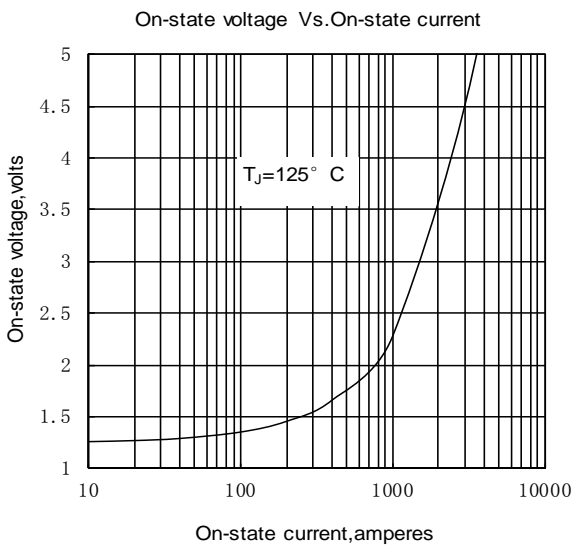


Fig.1

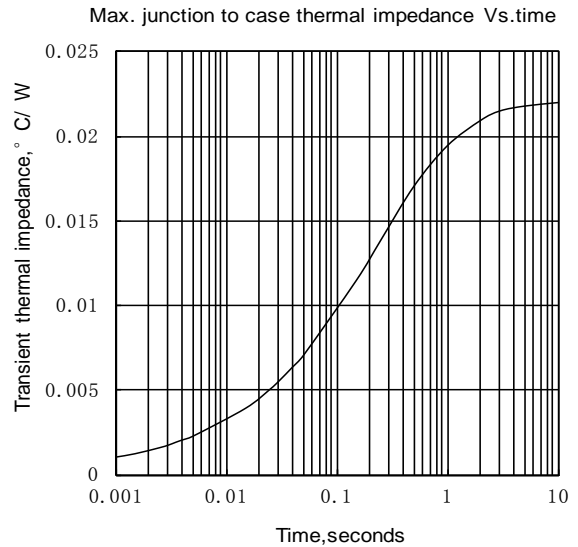


Fig.2

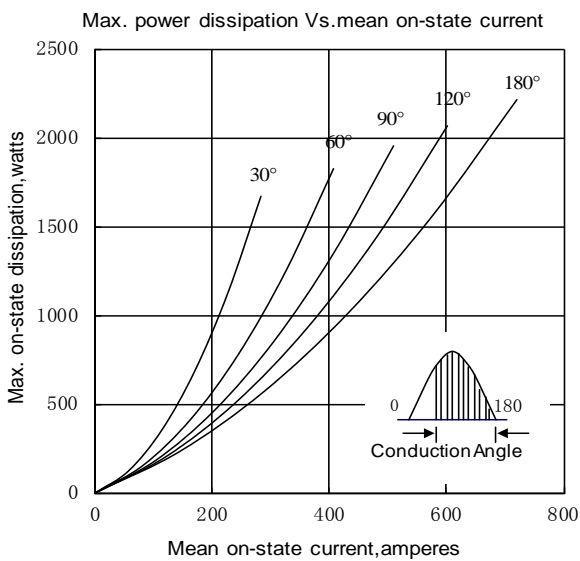


Fig.3

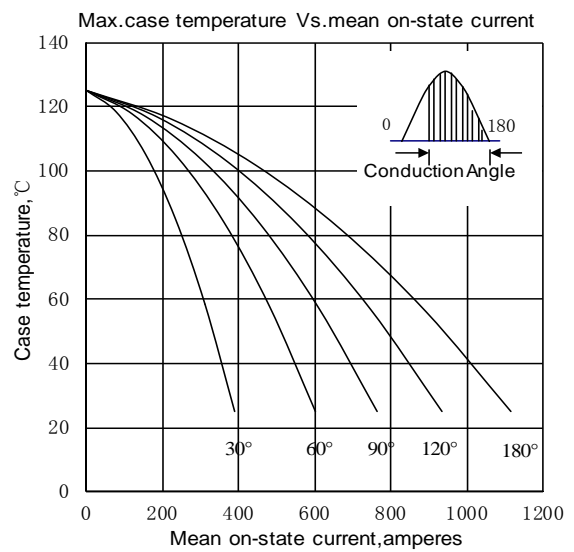


Fig.4

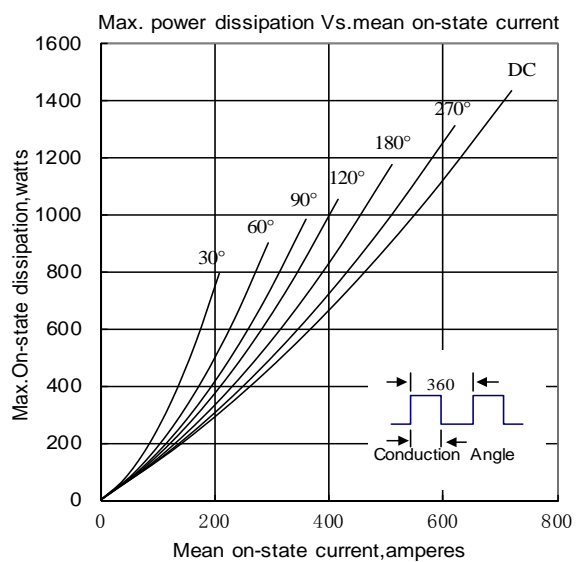


Fig.5

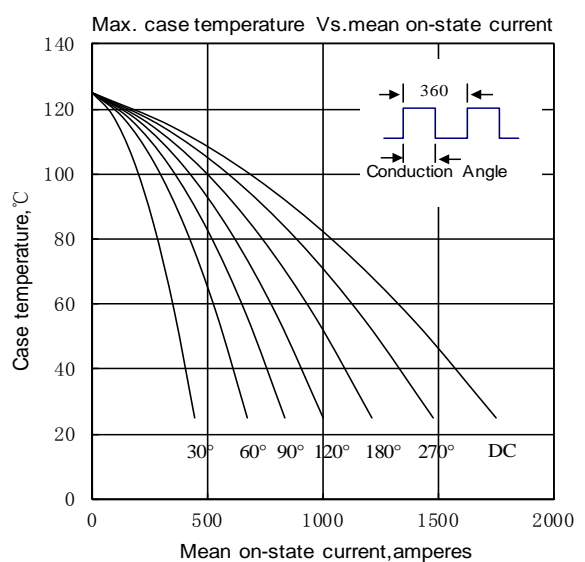


Fig.6

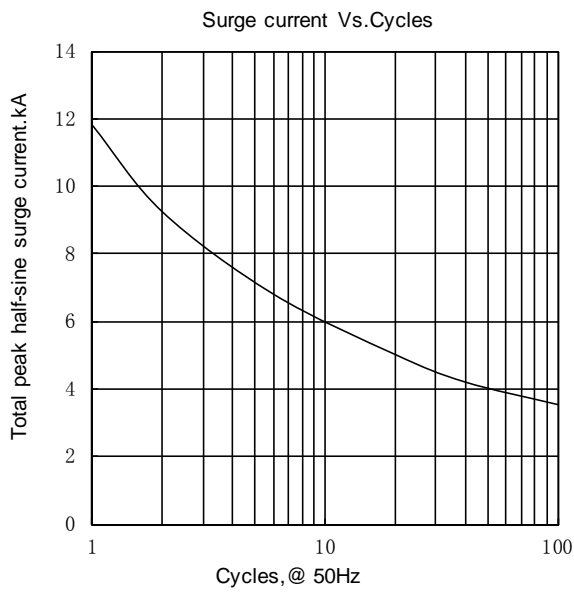


Fig.7

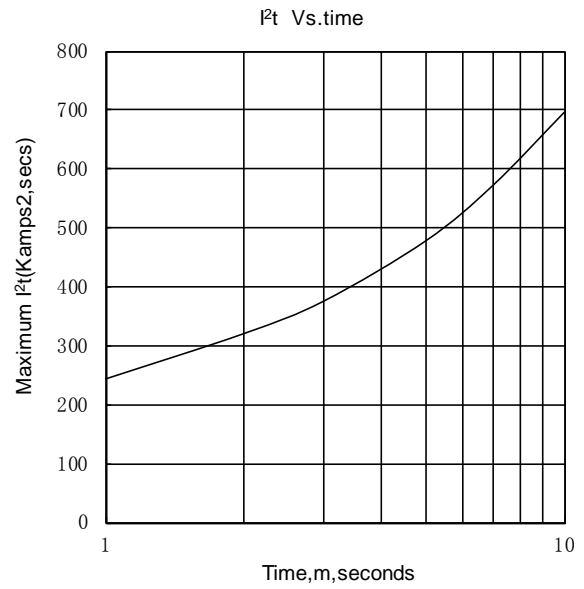


Fig.8

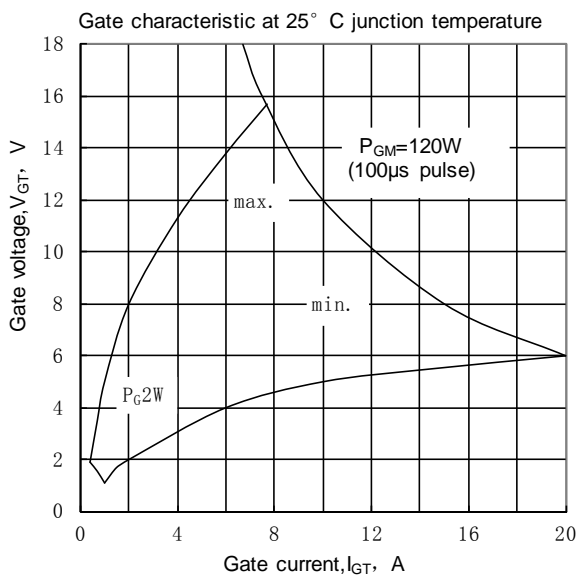


Fig.9

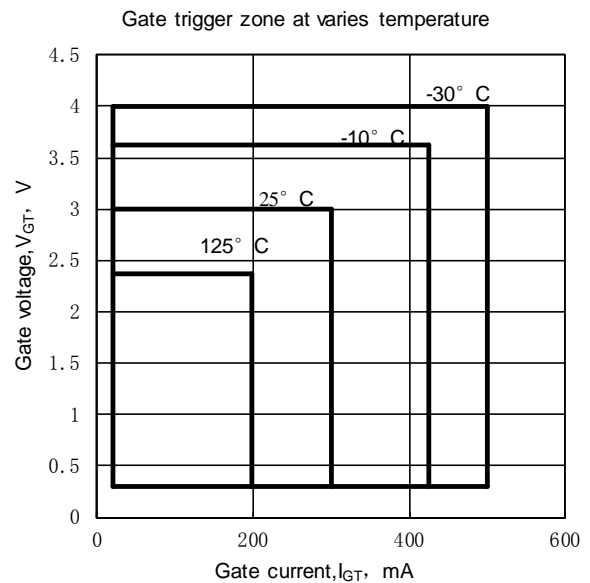


Fig.10

Outline:

