

Features :

- Low VCE(sat) Trench IGBT technology
- 10μs short circuit capability
- VCE(sat) with positive temperature coefficient
- Low inductance case
- Fast & soft reverse recovery anti-parallel FWD

Typical Applications :

- Inverter for motor drive
- AC and DC servo drive amplifier
- Motion/servo control
- Uninterruptible power supply

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	VALUE			UNIT	
			Min	Type	Max		
V _{CES}	Collector-Emitter voltage	T _J =25°C			1700	V	
V _{GES}	Gate-Emitter voltage	T _J =25°C			±20	V	
I _C	Collector current	T _C =25°C			280	A	
		T _C =100°C			150	A	
I _{CP}		t _p = 1ms			300	A	
P _C	Collector power dissipation	T _J =175°C			1127	W	
T _J	Junction temperature	/			175	°C	
T _{stg}	Storage temperature	/	-40		125	°C	
V _{iso}	Isolation between terminal and copper base	T _J =25°C , AC: 1minute	4000			V	
I _{CES}	Zero gate voltage collector current	T _J =25°C , V _{CE} =1700V, V _{GE} =0V			5.0	mA	
I _{GES}	Gate-Emitter leakage current	T _J =25°C , V _{CE} =0V, V _{GE} =±20V	-400		400	nA	
V _{GE(th)}	Gate-Emitter threshold voltage	V _{CE} = V _{GE} , I _C =6mA	5.6	6.2	6.8	V	
V _{CE(sat)}	Collector-Emitter saturation voltage	T _J =25°C , V _{GE} =15V, I _C =150A		1.80	2.20	V	
		T _J =125°C , V _{GE} =15V, I _C =150A		2.25		V	
		T _J =150°C , V _{GE} =15V, I _C =150A		2.35		V	
R _{Gint}	Internal Gate Resistance			4.3		Ω	
C _{ies}	Input capacitance	T _J =25°C , V _{CE} =25V, V _{GE} =0V, f=1MHz		10.2		nF	
t _{d(on)}	Turn-on delay time	V _{CC} =900V, I _C =150A, V _{GE} =±15V, R _G =4.8Ω, T _J =150°C		240		ns	
t _r				55		ns	
t _{d(off)}	Turn-off delay time			624		ns	
t _f				180		ns	
E _{on}	Turn-on switching loss				72.5		mJ
E _{off}	Turn-off switching loss				51.5		mJ
I _{SC}	SC data	V _{GE} ≤15 V, V _{CC} =1000V, t _p ≤10μs, T _{VJ} =150°C		600		A	
t _{sc}	Short circuit withstand time	T _J =150°C , V _{CC} =1000V, V _{GE} =±15V, R _G =4.8Ω	10			μs	
V _F	Forward on voltage	T _J =25°C , I _F =150A		1.80	2.25	V	
		T _J =125°C , I _F =150A		1.90		V	
		T _J =150°C , I _F =150A		1.95		V	
Q _r	Recovered charge			93.5		μC	
I _{RM}	Peak reverse recovery current	T _J =150°C, V _R =900V, I _F =150A, -di/dt=3300A/μs, V _{GE} =-15V		240		A	
E _{rec}	Reverse recovery energy			52.8		mJ	
t _{rr}	Reverse recovery time	T _J =150°C , I _F =150A		950		ns	
R _{th(j-c)}	Thermal resistance(1 device)	IGBT			0.133	°C/W	
		FWD			0.240	°C/W	
Screw torque	Mounting(M6)	/	3.5		5.0	N·m	
	Terminals(M6)	/	3.5		5.0	N·m	
W _t	Weight				300	g	
Outline	M42						

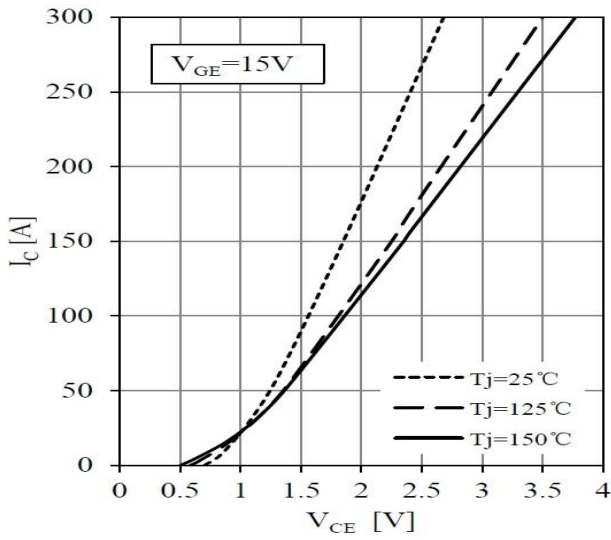


Fig 1. IGBT Output Characteristics

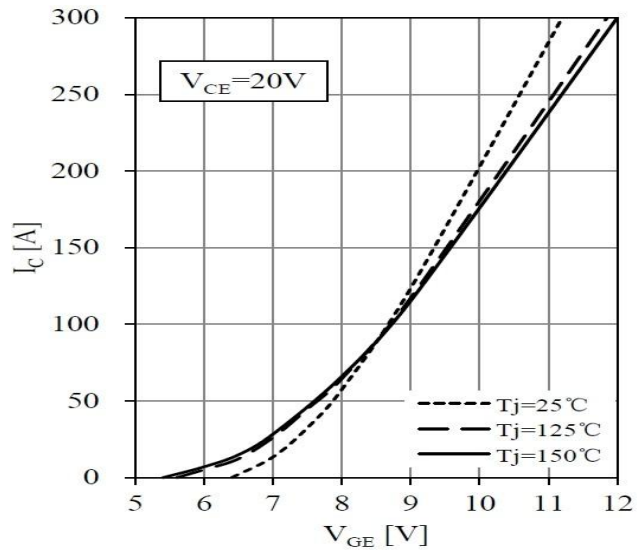


Fig 2. IGBT Transfer Characteristics

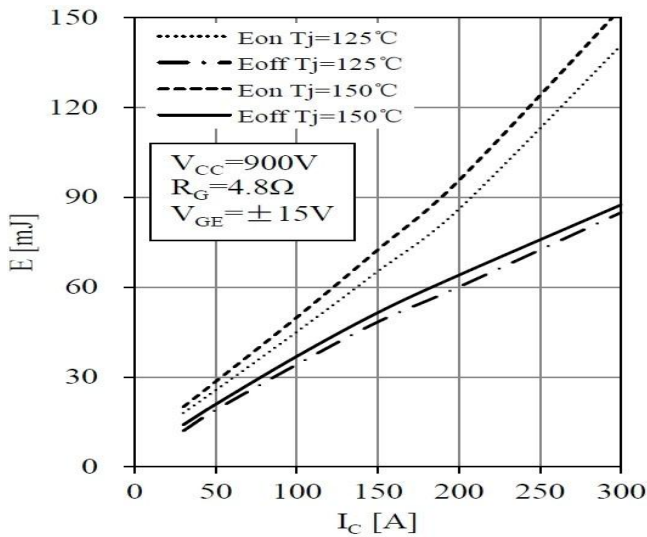


Fig 3. IGBT Switching Loss vs. I_C

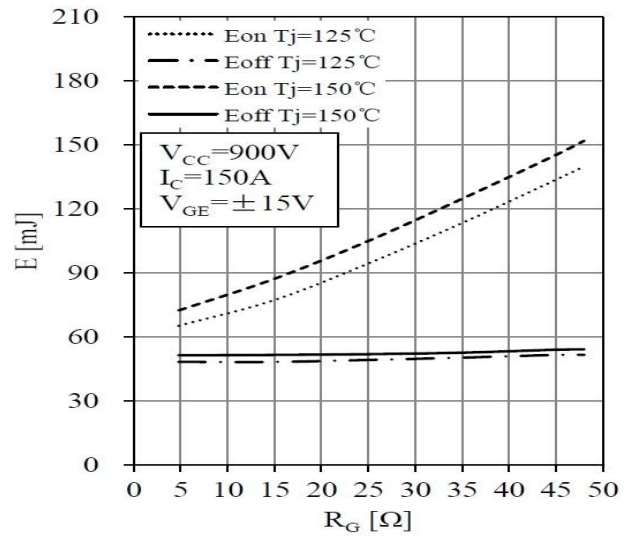


Fig 4. IGBT Switching Loss vs. R_G


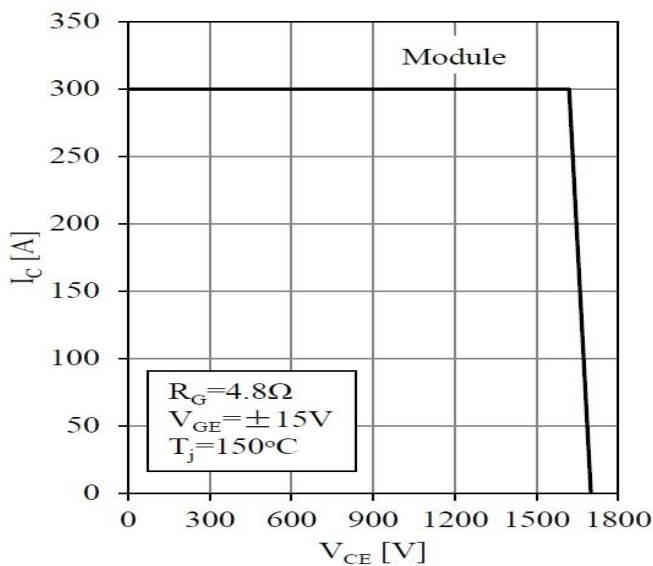


Fig 5. RBSOA Fig

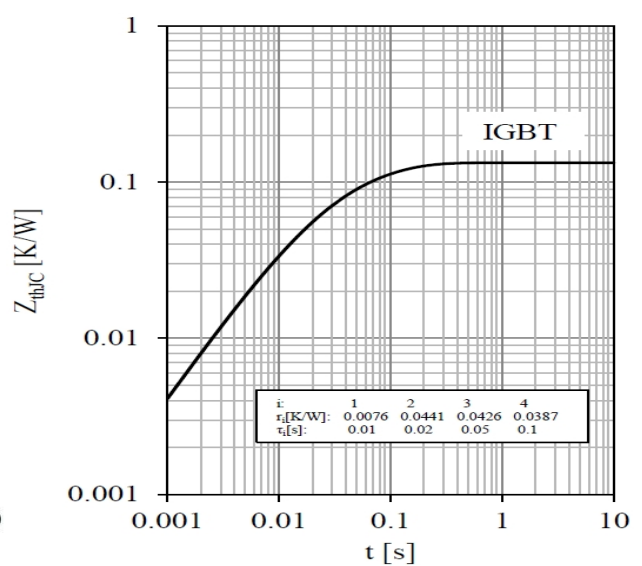

6. IGBT Transient Thermal Impedance

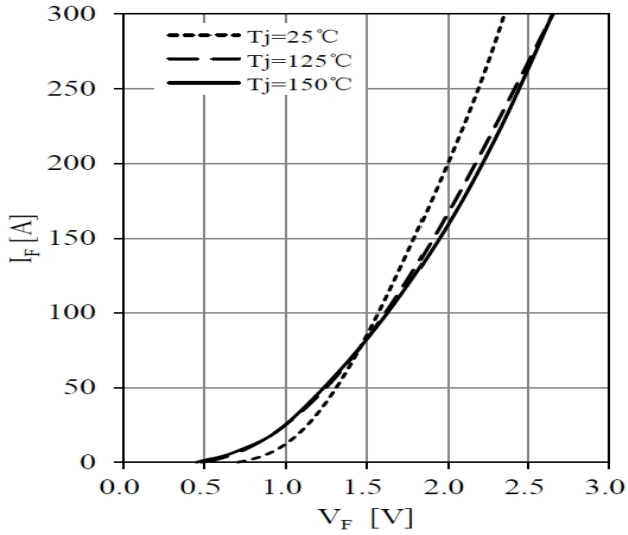


Fig 7. Diode Forward Characteristics

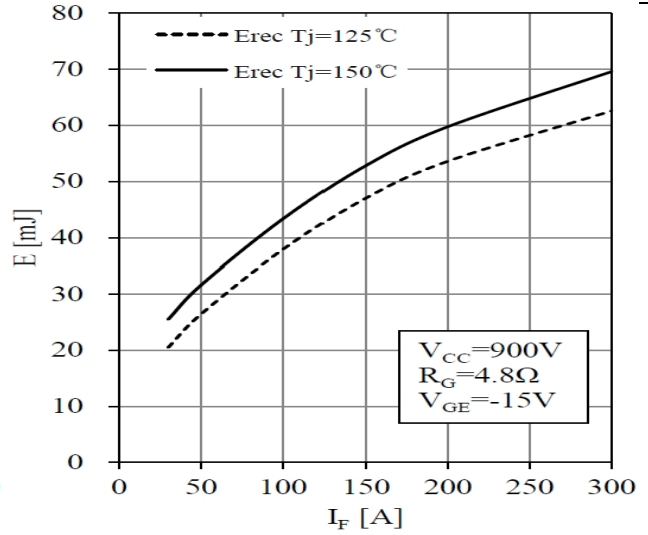


Fig 8. Diode Switching Loss vs. IF

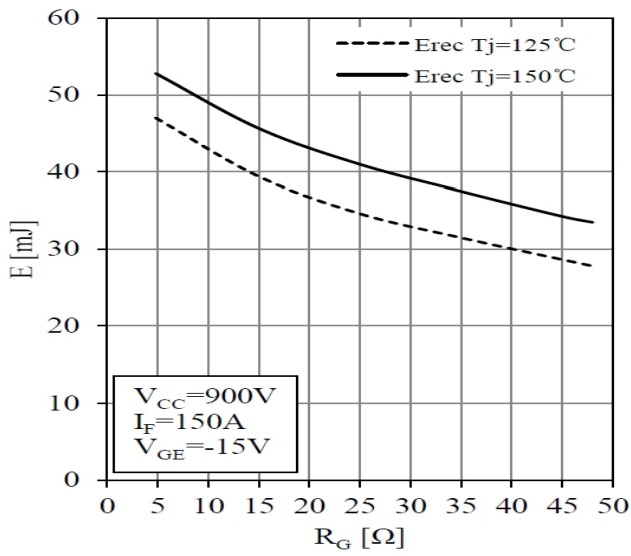


Fig 9. Diode Switching Loss vs. RG



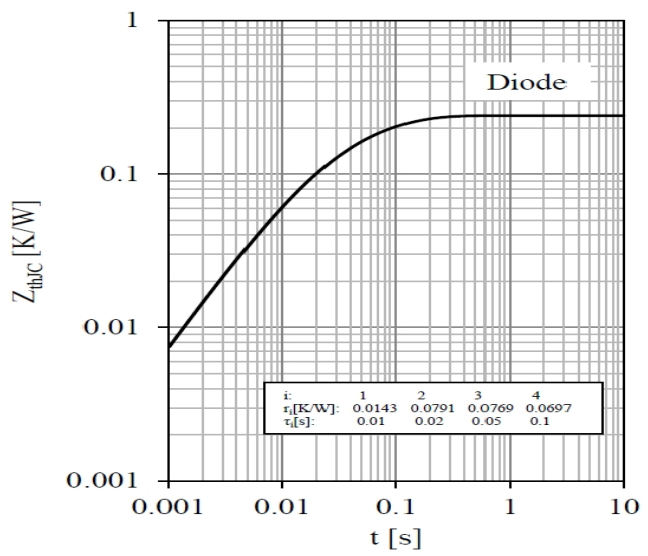


Fig 10. Diode Transient Thermal Impedance

Outline & Circuit Diagram

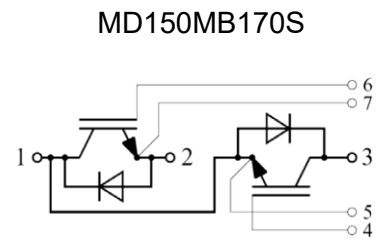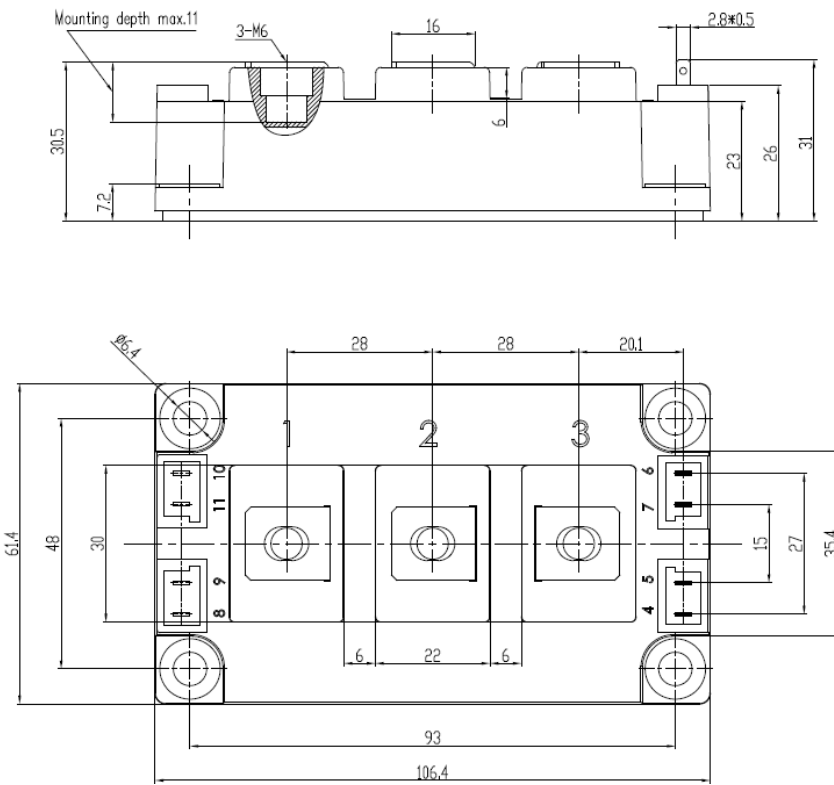

Unmarked dimensional tolerance : $\pm 0.5\text{mm}$