

Features :

- Isolated mounting base 4000V~
- Pressure contact technology with Increased power cycling capability
- Space and weight saving

Typical Applications

- AC/DC Motor drives
- Various rectifiers
- DC supply for PWM inverter

V_{DSM}, V_{RSM}	V_{DRM}, V_{RRM}	品名
2700V	2600V	Mx400TH260W
2900V	2800V	Mx400TH280W
3100 V	3000 V	Mx400TH300W
3300 V	3200 V	Mx400TH320W
3500 V	3400 V	Mx400TH340W
3700 V	3600 V	Mx400TH360W

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_J(^{\circ}C)$	VALUE			UNIT
				Min.	Typ.	Max.	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Single side water cooled, $T_c=55^{\circ}C$	125			400	A
$I_{T(RMS)}$	RMS on-state current					628	A
I_{DRM} I_{RRM}	Repetitive peak current	at V_{DRM} at V_{RRM}	125			50	mA
I_{TSW}	Surge on-state current	10ms half sine wave $V_R=60\%V_{RRM}$	125			10.5	kA
I^{2t}	I^{2t} for fusing coordination					551	A^2s*10^3
V_{TO}	Threshold voltage		125			1.12	V
r_T	On-state slope resistance					1.25	mΩ
V_{TM}	Peak on-state voltage	$I_{TM}=1200A$	25			2.85	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=67\%V_{DRM}$	125			800	V/μs
di/dt	Critical rate of rise of on-state current	Gate source 1.5A $t_r \leq 0.5\mu s$ Repetitive	125			100	A/μs
I_{GT}	Gate trigger current	$V_A=12V$, $I_A=1A$	25	30		200	mA
V_{GT}	Gate trigger voltage			0.8		3.0	V
I_H	Holding current			10		200	mA
V_{GD}	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125	0.2			V
$R_{th(j-c)}$	Thermal resistance Junction to case	D.C. Single side cooled per chip				0.073	°C /W
$R_{th(c-h)}$	Thermal resistance case to heat sink	D.C. Single side cooled per chip				0.040	°C /W
V_{iso}	Isolation voltage	50Hz,R.M.S., $t=1min$, $I_{iso}:1mA(MAX)$		4000			V
F_m	Terminal connection torque(M10)				12.0		N·m
	Mounting torque(M6)				6.0		N·m
T_{vj}	Junction temperature			-40		125	°C
T_{stg}	Stored temperature			-40		125	°C
W_t	Weight				1560		g
Outline	M14						

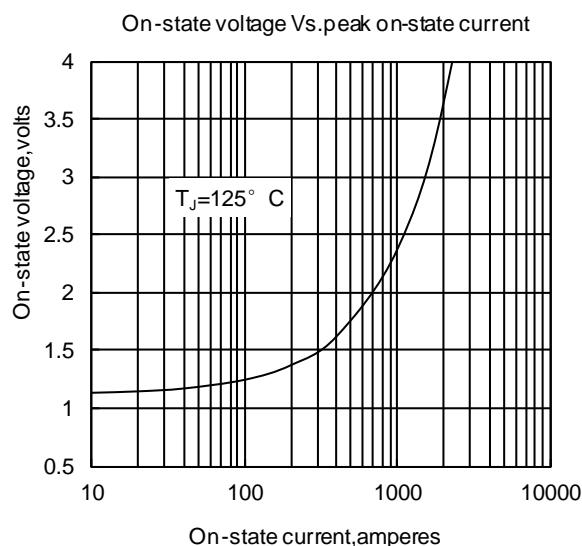


Fig1

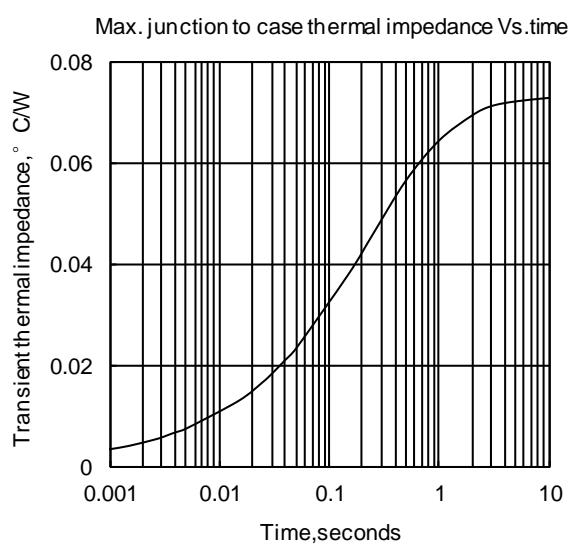


Fig2

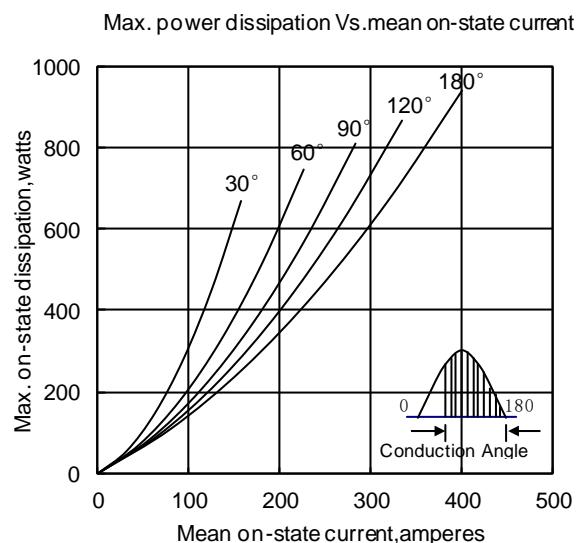


Fig3

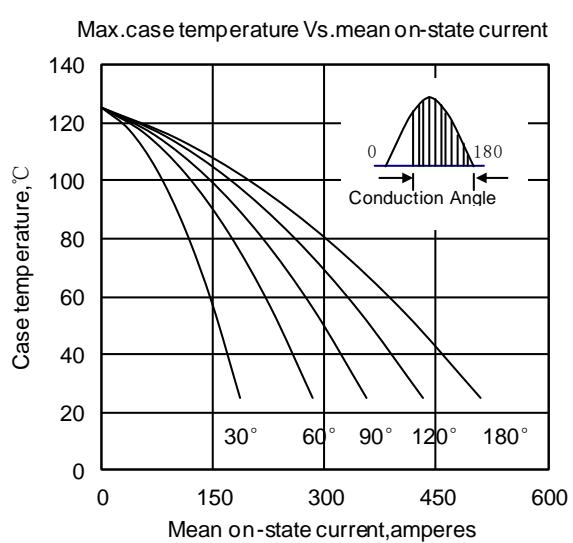


Fig4

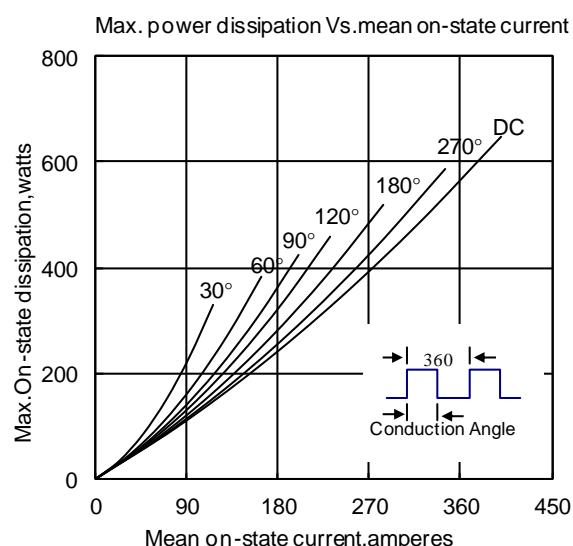


Fig5

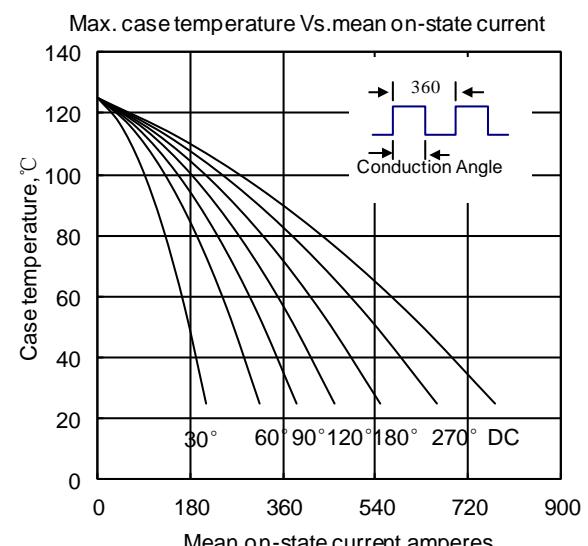


Fig6

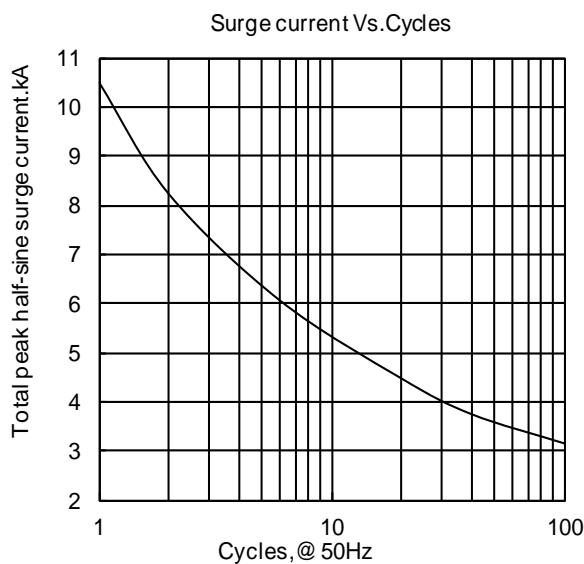


Fig7

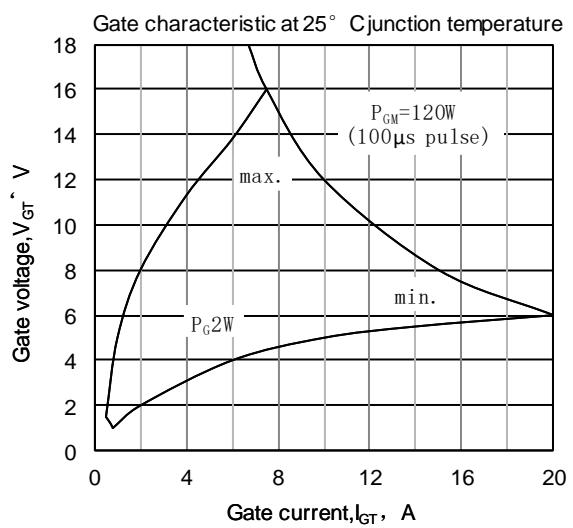


Fig8


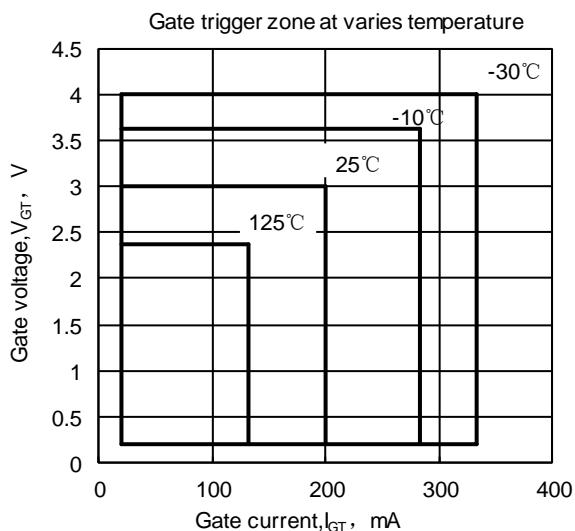



Fig9

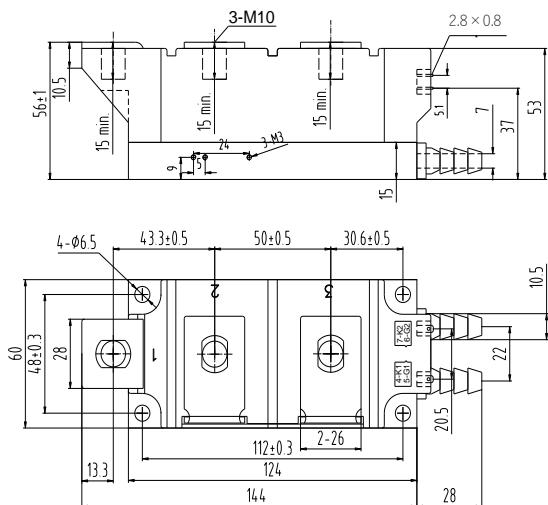

MD400TH**W

MR400TH**W

MC400TH**W

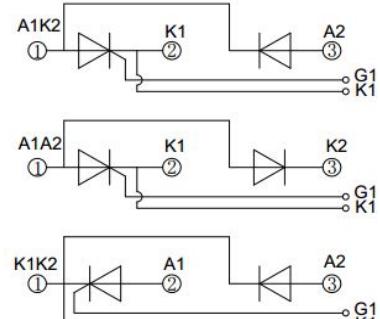

Unmarked dimensional tolerance : $\pm 0.5\text{mm}$