

Features:

- Isolated mounting base 2500V~
- Pressure contact technology with Increased power cycling capability
- Space and weight saving

Typical Applications

- AC/DC Motor drives
- Various rectifiers
- DC supply for PWM inverter

V_{DSM}, V_{RSM}	V_{DRM}, V_{RRM}	品名
900V	800V	Mx400T80W
1100V	1000V	Mx400T100W
1300V	1200V	Mx400T120W
1500V	1400V	Mx400T140W
1700V	1600V	Mx400T160W
1900V	1800V	Mx400T180W

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_J(^{\circ}\text{C})$	VALUE			UNIT
				Min.	Typ.	Max.	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Single side cooled, $T_{HS}=55^{\circ}\text{C}$	125			400	A
$I_{T(RMS)}$	RMS on-state current					628	A
V_{DRM}/V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	$t_p=10\text{ms}$	125	800		1800	V
I_{DRM}/I_{RRM}	Repetitive peak current	at V_{DRM} at V_{RRM}	125			35	mA
I_{TSM}	Surge on-state current	10ms half sine wave $V_R=60\%V_{RRM}$	125			11	kA
I^{2t}	I^{2t} for fusing coordination					605	$10^3\text{A}^2\text{s}$
V_{TO}	Threshold voltage		125			0.80	V
r_T	On-state slope resistance					0.80	mΩ
V_{TM}	Peak on-state voltage			25		1.90	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=67\%V_{DRM}$	125			800	V/μs
di/dt	Critical rate of rise of on-state current	Gate source 1.5A, $t_r \leq 0.5\mu\text{s}$ Repetitive	125			100	A/μs
I_{GT}	Gate trigger current	$V_A=12\text{V}$, $I_A=1\text{A}$	25	30		200	mA
V_{GT}	Gate trigger voltage			1.0		3.0	V
I_H	Holding current			20		200	mA
V_{GD}	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125			0.2	V
I_{GD}	Non-trigger gate current	$V_{DM}=67\%V_{DRM}$	125	1.5			mA
$R_{th(j-c)}$	Thermal resistance Junction to case	D.C. Single side cooled, per chip. DC				0.110	°C/W
$R_{th(c-w)}$	Thermal resistance case to water	D.C. Single side cooled, per chip. (5L/min)				0.056	°C/W
V_{iso}	Isolation voltage	50Hz,R.M.S, $t=1\text{min}$, $I_{iso}:1\text{mA}(\text{Max})$		2500			V
F_m	Terminal connection torque(M8)			10.0		12.0	N·m
	Mounting torque(M6)			4.5		6.0	N·m
T_{vj}	Junction temperature			-40		125	°C
T_{stg}	Stored temperature			-40		125	°C
T_{water}	Water temperature	Water flow=5L/min		0		30	°C
W_t	Weight				1340		g
Outline	M13						

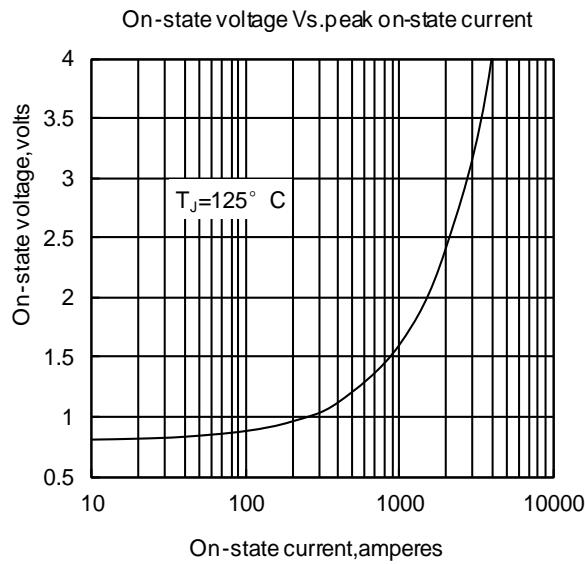


Fig1

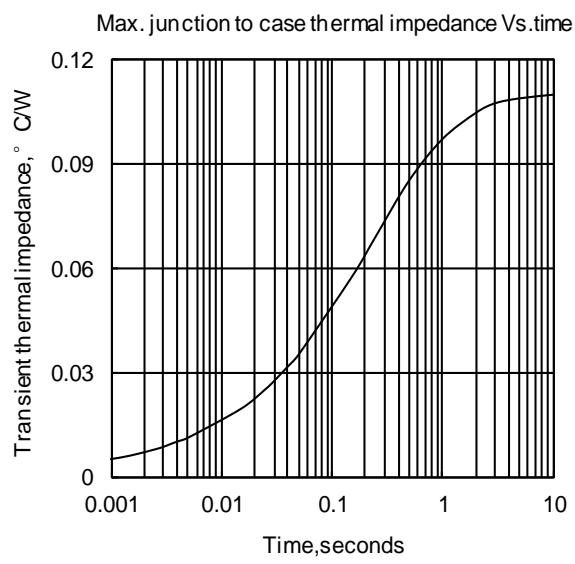


Fig2

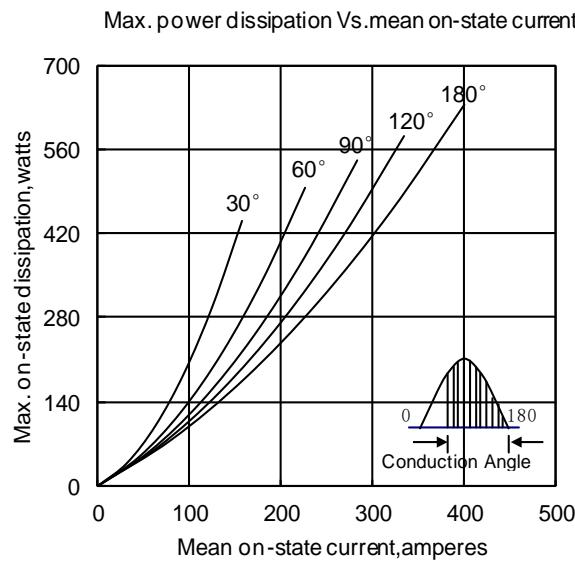


Fig3

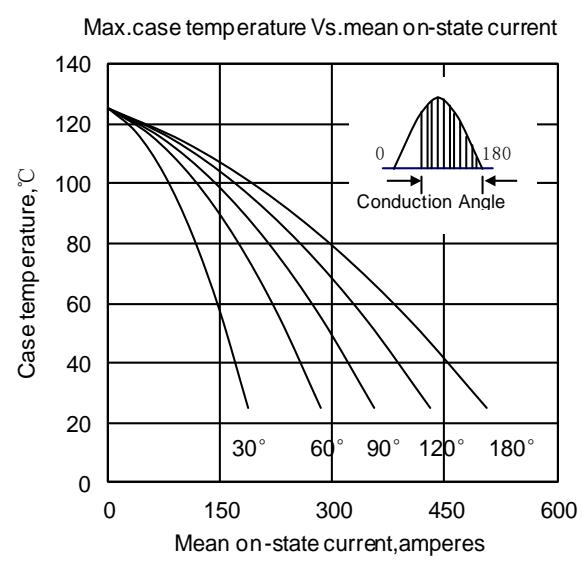


Fig4

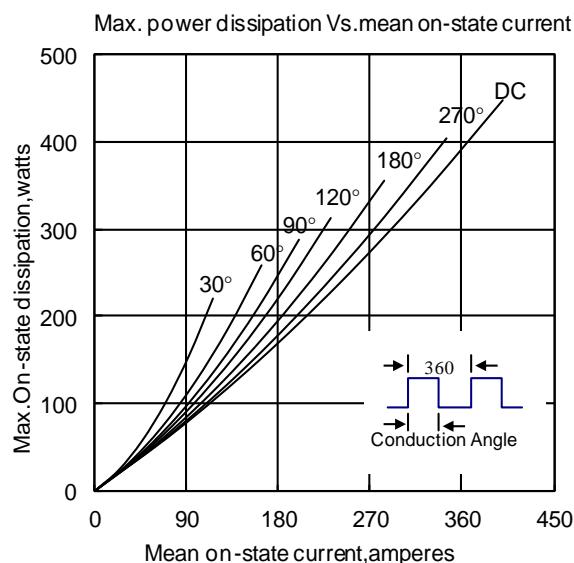


Fig5

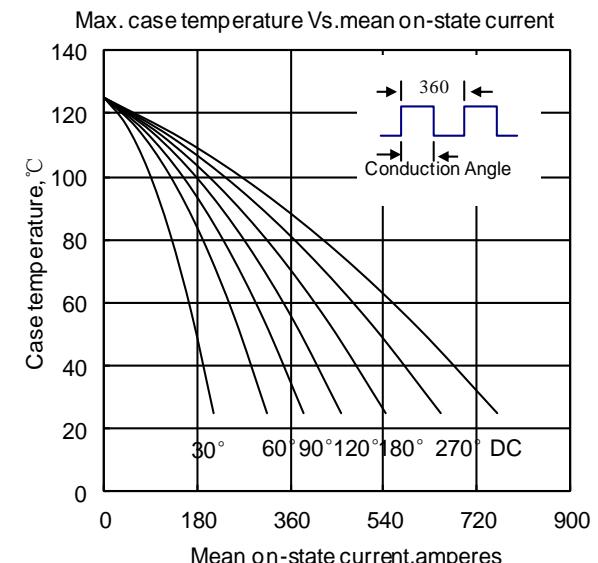


Fig6

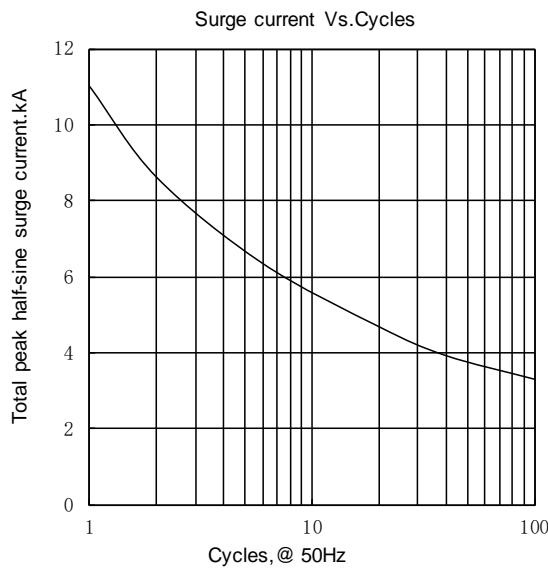


Fig.7

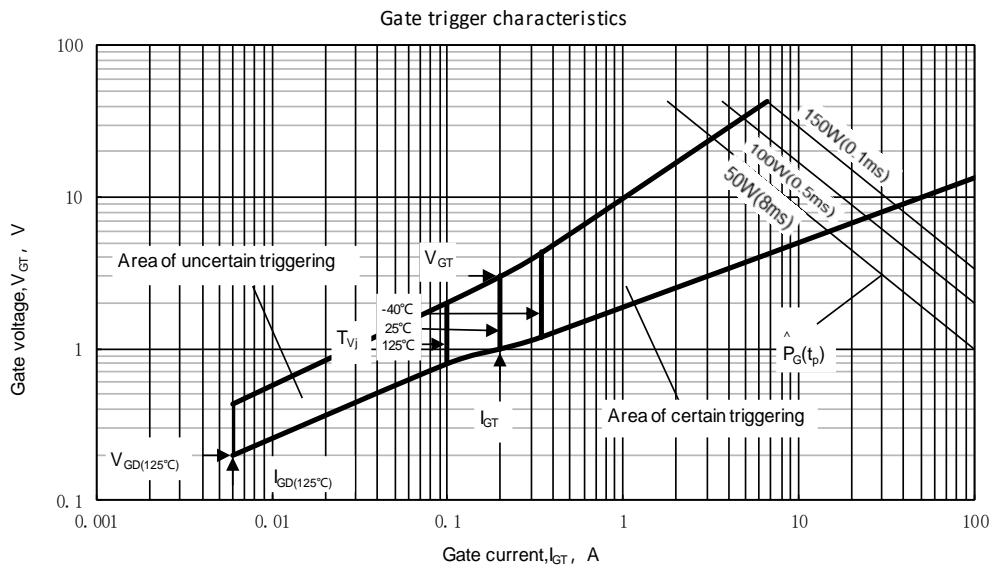


Fig8

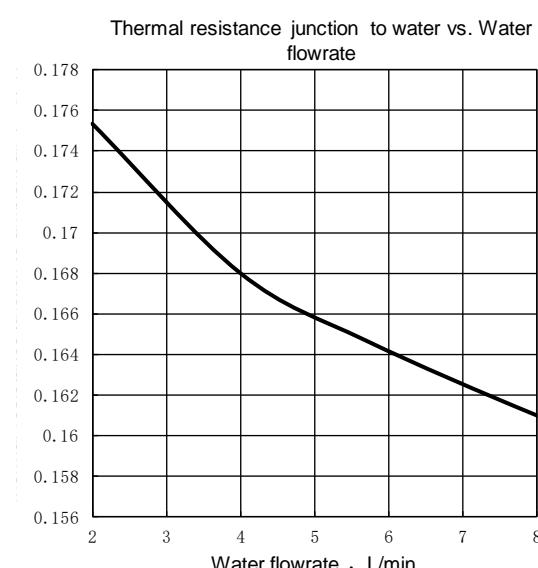


Fig9


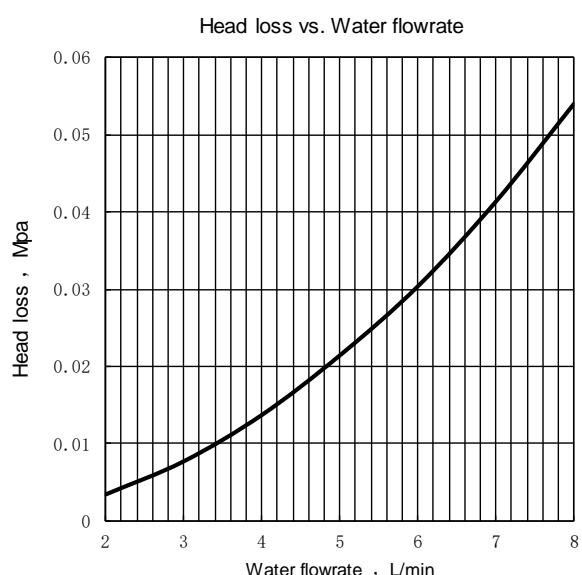



Fig.10

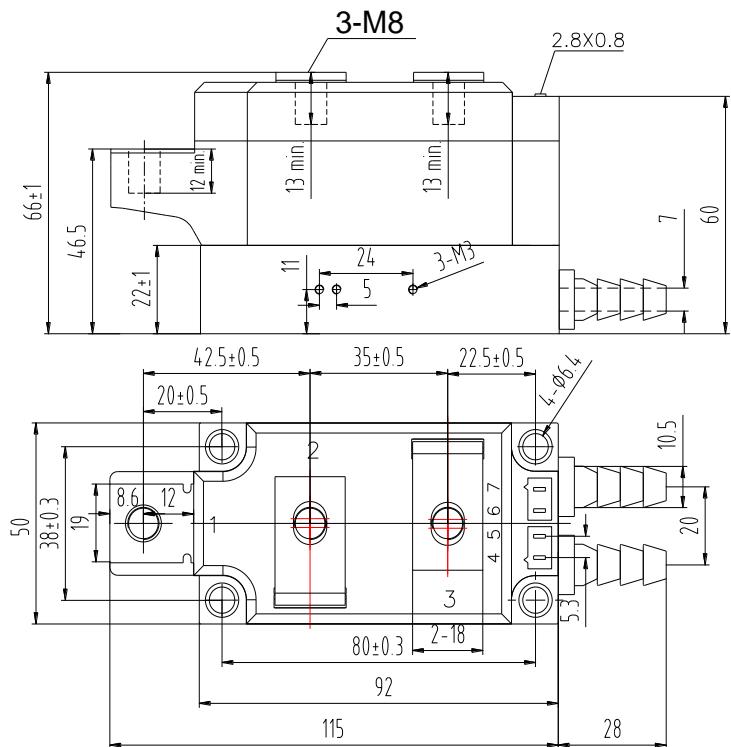

MD400T**W

MR400T**W

MC400T**W

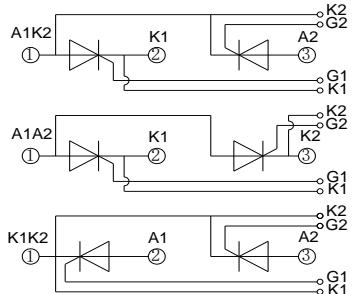

Unmarked dimensional tolerance : $\pm 0.5\text{mm}$