

Features

- Low forward voltage drop
- High reverse voltage
- Hermetic metal cases with ceramic insulators

Typical Applications

- All purpose high power rectifier diodes
- High power resistance welding equipment
- Non-controllable and half-controllable rectifiers
- Controlled rectifiers

I_{F(AV)} **1510 A**
V_{RRM} **5600~6500 V**
I_{FSM} **26 kA**
I²t **3380 10³A²S**



SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T _J (°C)	VALUE			UNIT
				Min	Type	Max	
I _{F(AV)}	Mean forward current	180° half sine wave 50Hz Double side cooled,	T _C =100°C	150		1510	A
V _{RRM}	Repetitive peak reverse voltage	tp=10ms	150	5600		6500	V
I _{RRM}	Repetitive peak current	At V _{RRM}	150			200	mA
I _{FSM}	Surge forward current	10ms half sine wave V _R =0.6V _{RRM}	150			26	kA
I ² t	I ² t for fusing coordination					3380	A ² s*10 ³
V _{FO}	Threshold voltage		150			0.92	V
r _F	Forward slope resistance					0.39	mΩ
V _{FM}	Peak forward voltage	I _{FM} =3000A, F=34kN	150			1.85	V
Q _{rr}	Recovery charge	I _{FM} =2000A, tp=2000μs, di/dt=-5A/μs, V _R =50V	150		5000		μC
R _{th(j-c)}	Thermal resistance Junction to case	DC double side cooled Clamping force 34kN				0.014	°C /W
R _{th(c-h)}	Thermal resistance case to heatsink					0.0035	
F _m	Mounting force			27		34	kN
T _{stg}	Stored temperature			-40		160	°C
W _t	Weight				1100		g
Outline		P53					

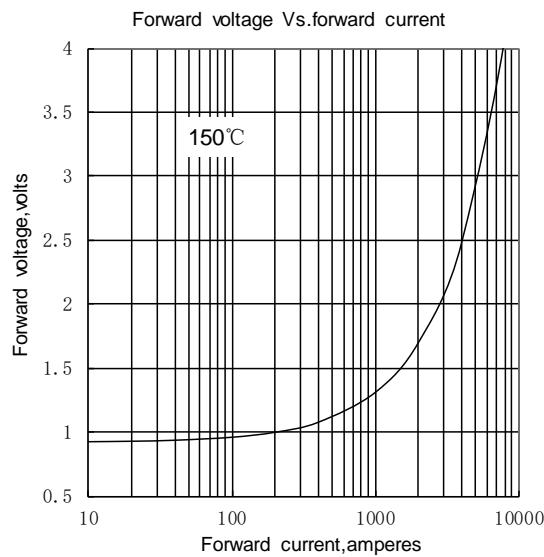


Fig.1

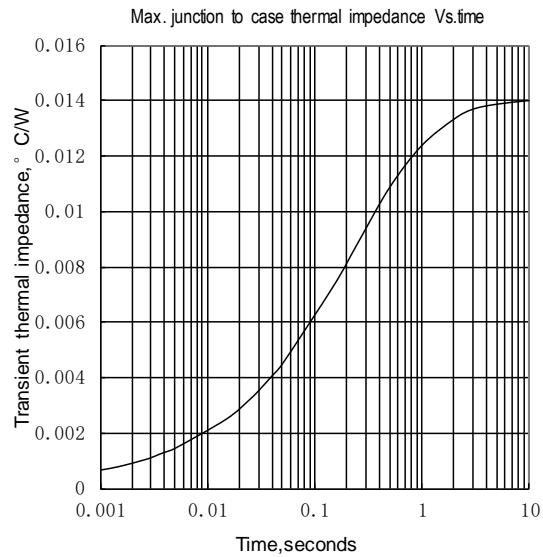


Fig.2

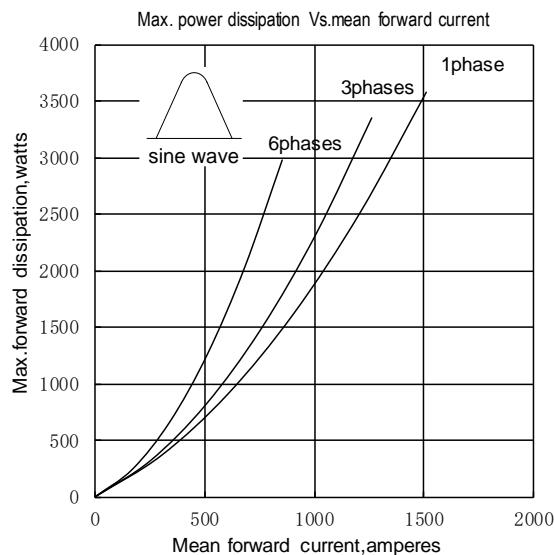


Fig.3

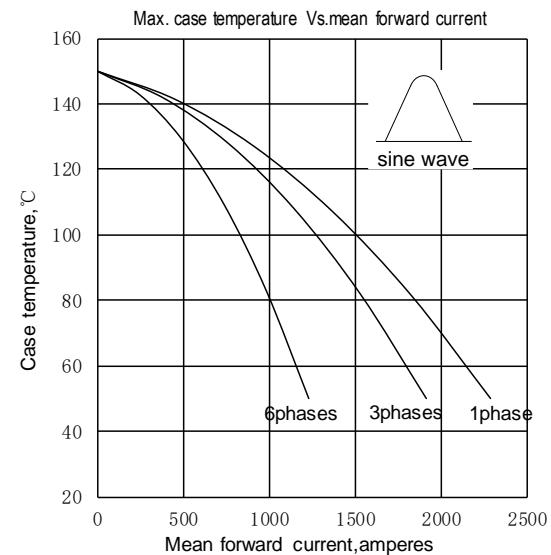


Fig.4

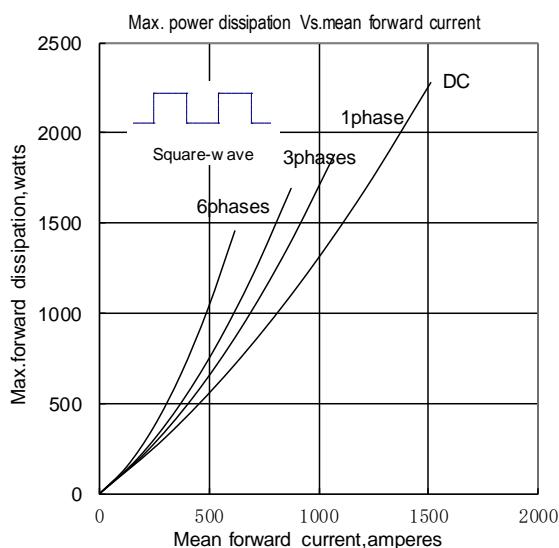


Fig.5

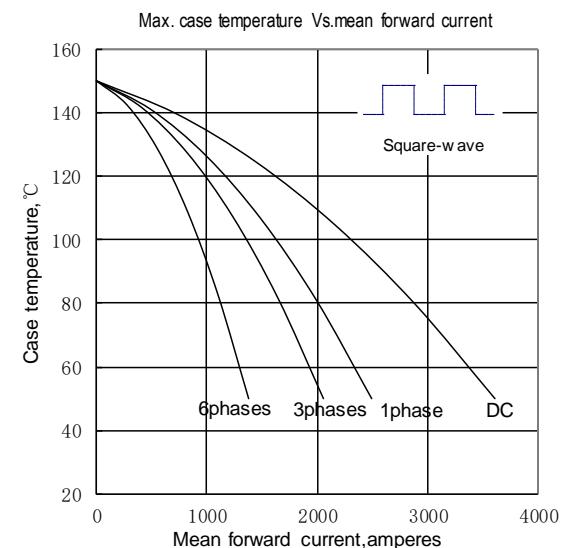


Fig.6

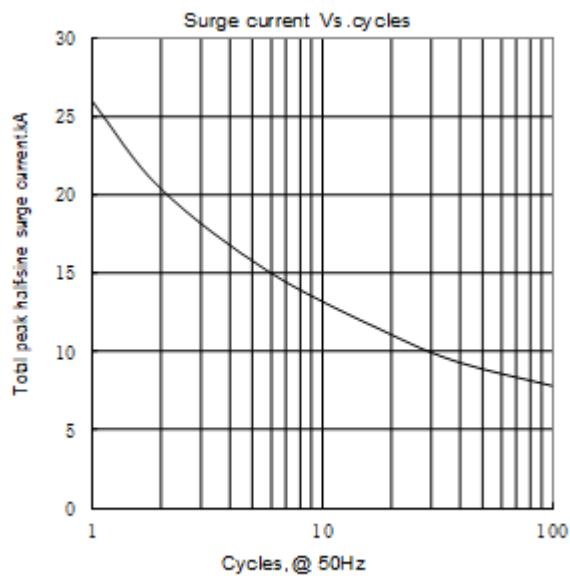


Fig.7

