

Features :

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

Typical Applications :

- AC controllers
- DC and AC motor control
- Controlled rectifiers

| | |
|-------------------|--|
| $I_{T(AV)}$ | 1880A |
| V_{DRM}/V_{RRM} | 4300 ~ 5200V |
| I_{TSM} | 24 kA |
| I^2t | 2880 10³A²S |

| SYMBOL | CHARACTERISTIC | TEST CONDITIONS | $T_j(^{\circ}C)$ | VALUE | | | UNIT |
|------------------------|--|--|-------------------|-------|------|-------|----------------------------------|
| | | | | Min | Type | Max | |
| $I_{T(AV)}$ | Mean on-state current | 180° half sine wave 50Hz Double side cooled | $T_C=70^{\circ}C$ | 125 | | 1880 | A |
| V_{DRM} V_{RRM} | Repetitive peak off-state voltage Repetitive peak reverse voltage | $t_p=10ms$ | | 125 | 4300 | 5200 | V |
| I_{DRM} I_{RRM} | Repetitive peak current | at V_{DRM} at V_{RRM} | | 125 | | 200 | mA |
| I_{TSM} | Surge on-state current | 10ms half sine wave | | 125 | | 24 | kA |
| I^2t | I^2t for fusing coordination | $V_R=0.6V_{RRM}$ | | | | 2880 | 10 ³ A ² s |
| V_{TO} | Threshold voltage | | | 125 | | 1.30 | V |
| r_T | On-state slope resistance | | | | | 0.35 | mΩ |
| V_{TM} | Peak on-state voltage | $I_{TM}=3000A, F=40kN$ | | 25 | | 2.43 | V |
| dv/dt | Critical rate of rise of off-state voltage | $V_{DM}=0.67V_{DRM}$ | | 125 | | 1000 | V/μs |
| di/dt | Critical rate of rise of on-state current | $V_{DM}=67\%V_{DRM}$, Gate pulse $t_r \leq 0.5\mu s$ $I_{GM}=1.5A$ | | 125 | | 250 | A/μs |
| Q_{rr} | Recovery charge | $I_{TM}=2000A, t_p=4000\mu s, di/dt=-5A/\mu s$, $V_R=100V$ | | 125 | 3000 | | μC |
| I_{GT} | Gate trigger current | $V_A=12V, I_A=1A$ | | 25 | 40 | 300 | mA |
| V_{GT} | Gate trigger voltage | | | | 0.8 | 3.0 | V |
| I_H | Holding current | | | | 20 | 250 | mA |
| I_L | Latching current | | | | | 1000 | mA |
| V_{GD} | Non-trigger gate voltage | $V_{DM}=67\%V_{DRM}$ | | 125 | | 0.3 | V |
| $R_{th(j-c)}$ | Thermal resistance Junction to case | D.C. Double side cooled Clamping force 40kN | | | | 0.010 | °C/W |
| $R_{th(c-h)}$ | Thermal resistance case to heatsink | | | | | 0.003 | |
| F_m | Mounting force | | | | 35 | 47 | kN |
| T_{vj} | Junction temperature | | | | -40 | 125 | °C |
| T_{stg} | Stored temperature | | | | -40 | 140 | °C |
| W_t | Weight | | | | | 1100 | g |
| Outline | P17 | | | | | | |

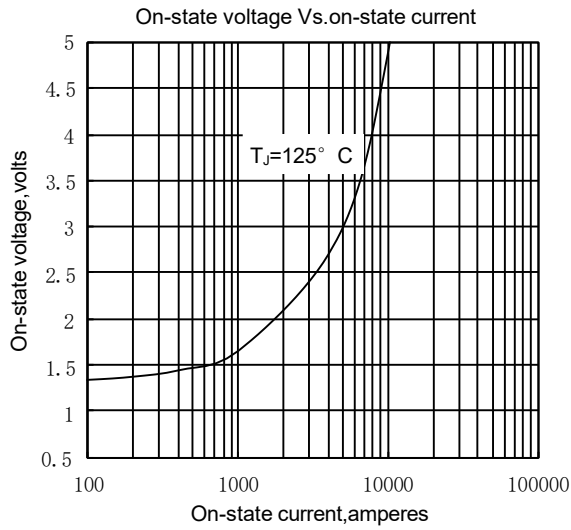


Fig.1

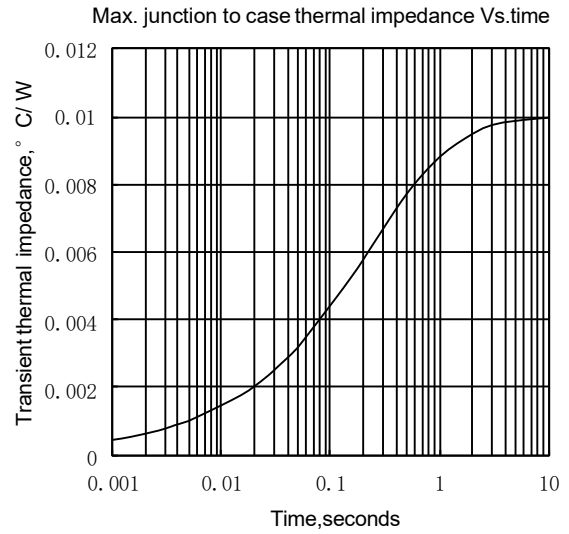


Fig.2

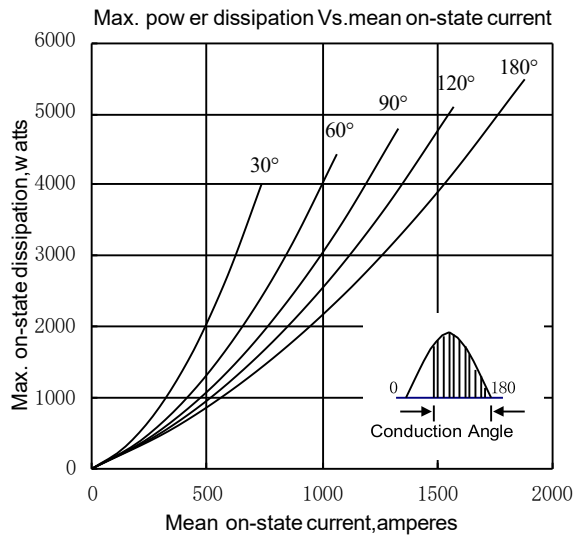


Fig.3

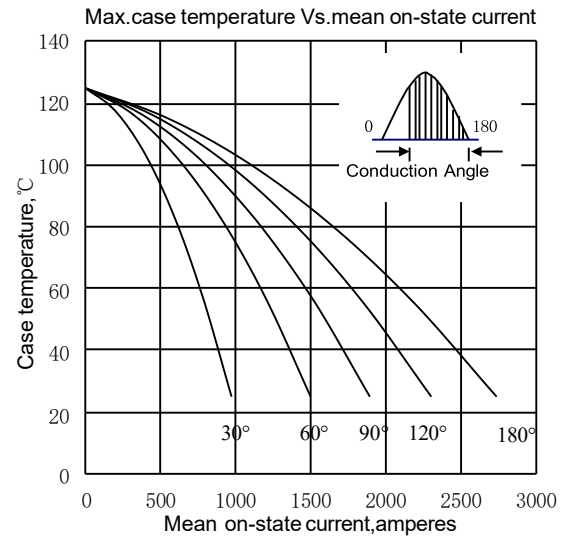


Fig.4

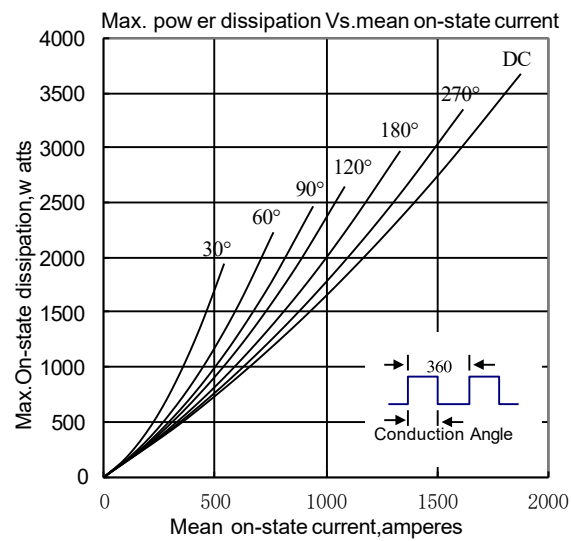


Fig.5

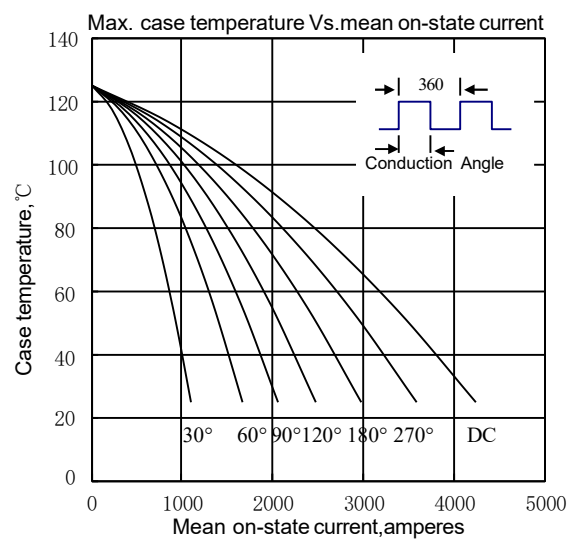


Fig.6

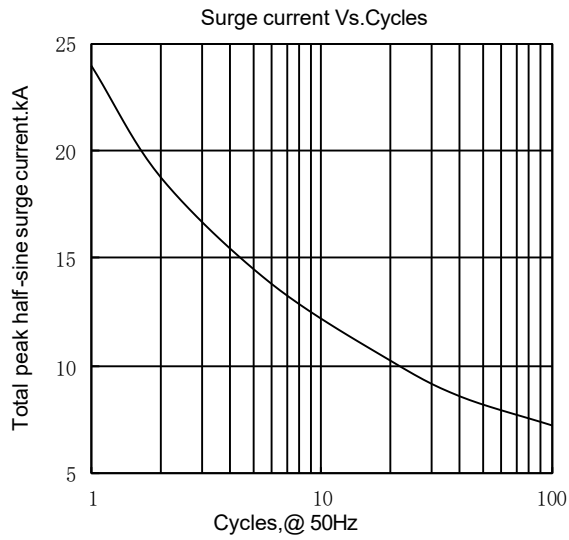


Fig.7


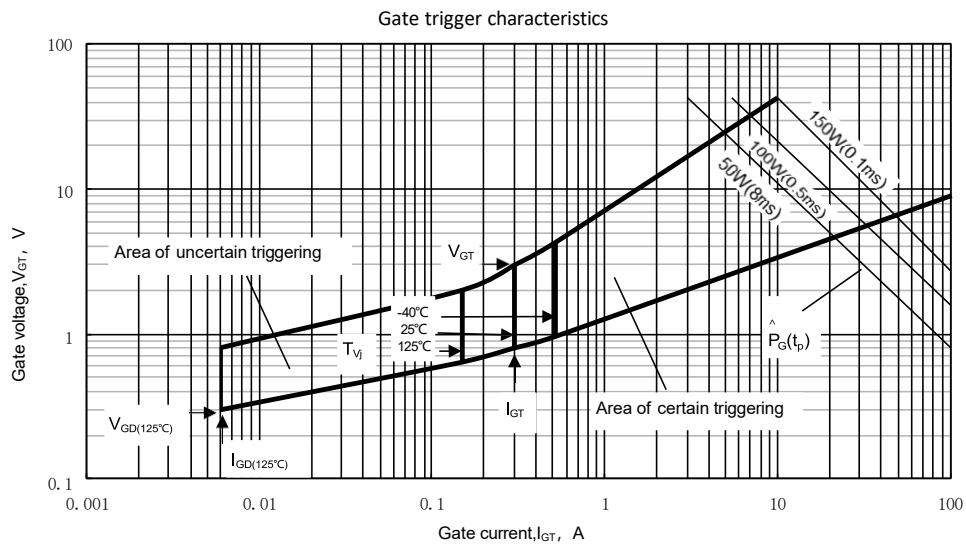


Fig.9

Outline:

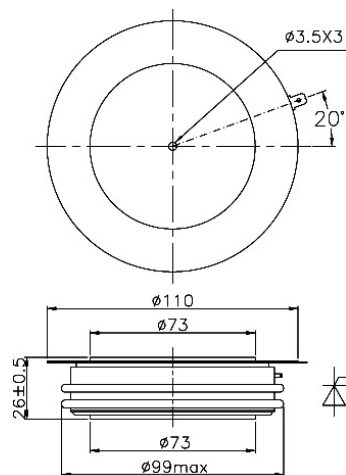

Nlps reserves the right to change specifications without notice.