

Features

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

$I_{T(AV)}$ 2460A
 V_{DRM}/V_{RRM} 1100 ~ 1800V
 I_{TSM} 35 kA
 I^2t 6125 10³A²S

Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

SYMBOL	CHARACTERISTIC	TEST CONDITIONS		T _j (°C)	VALUE			UNIT
					Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled,	T _C =70°C	125			2460	A
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	V_{DRM} & V_{RRM} tp=10ms V_{DSM} & $V_{RSM} = V_{DRM}$ & $V_{RRM} + 100V$		125	1100		1800	V
I_{DRM} I_{RRM}	Repetitive peak current	at V_{DRM} at V_{RRM}		125			120	mA
I_{TSM}	Surge on-state current	10ms half sine wave		125			35	kA
I^2t	I^2t for fusing coordination	$V_R = 0.6V_{RRM}$					6125	A ² s*10 ³
V_{TO}	Threshold voltage			125			0.87	V
r_T	On-state slope resistance						0.14	mΩ
V_{TM}	Peak on-state voltage	$I_{TM} = 4000A, F = 32kN$		25			2.00	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM} = 0.67V_{DRM}$		125			1000	V/μs
di/dt	Critical rate of rise of on-state current	$V_{DM} = 67\%V_{DRM}$ to 3000A, Gate pulse t _r ≤ 0.5μs I _{GM} = 1.5A		125			200	A/μs
Q _r	Recovery charge	$I_{TM} = 2000A, tp = 4000μs, di/dt = -20A/μs,$ $V_R = 100V$		125		1800		μC
I_{GT}	Gate trigger current	$V_A = 12V, I_A = 1A$		25	40		300	mA
V_{GT}	Gate trigger voltage				0.8		3.0	V
I_H	Holding current				20		300	mA
I_L	Latching current						1000	mA
V_{GD}	Non-trigger gate voltage	$V_{DM} = 67\%V_{DRM}$		125			0.3	V
$R_{th(j-c)}$	Thermal resistance Junction to case	D.C.: double side cooled Clamping force 32.0kN					0.0130	°C/W
$R_{th(c-h)}$	Thermal resistance case to heatsink						0.0035	
F_m	Mounting force				27		34	kN
T _{vj}	Junction temperature				-40		125	°C
T _{stg}	Stored temperature				-40		140	°C
W _t	Weight					820		g
Outline	P14b							

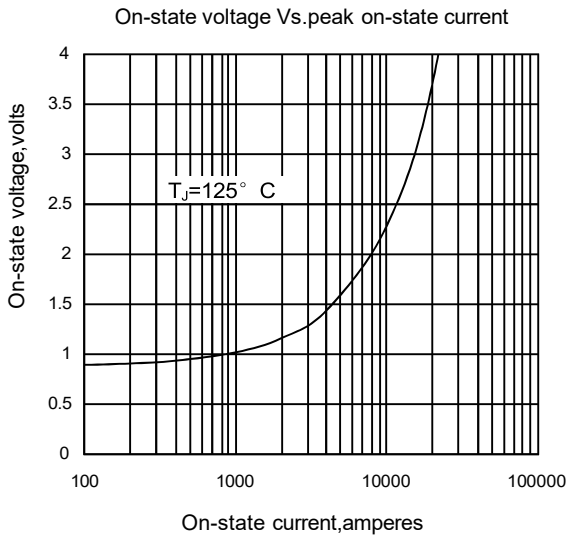


Fig1

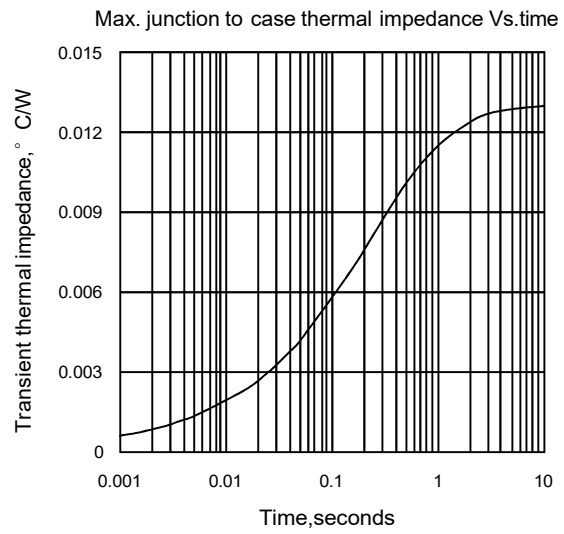


Fig2

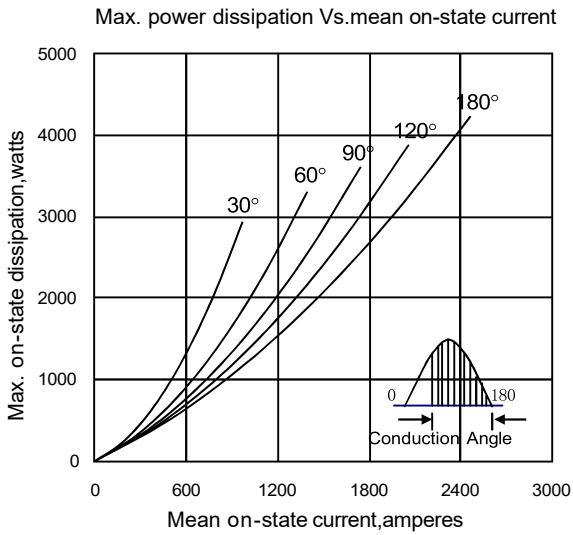


Fig3

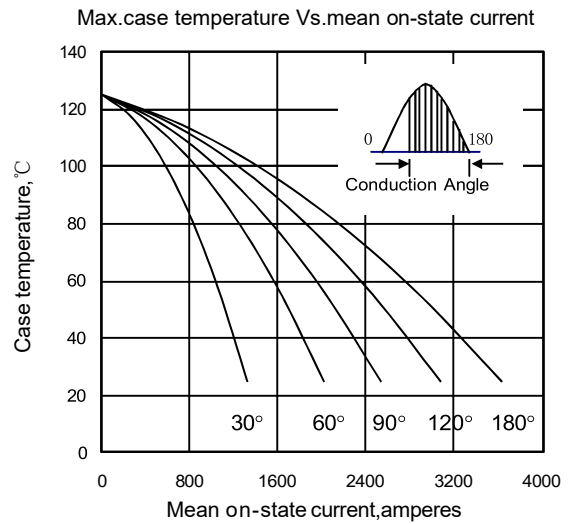


Fig4

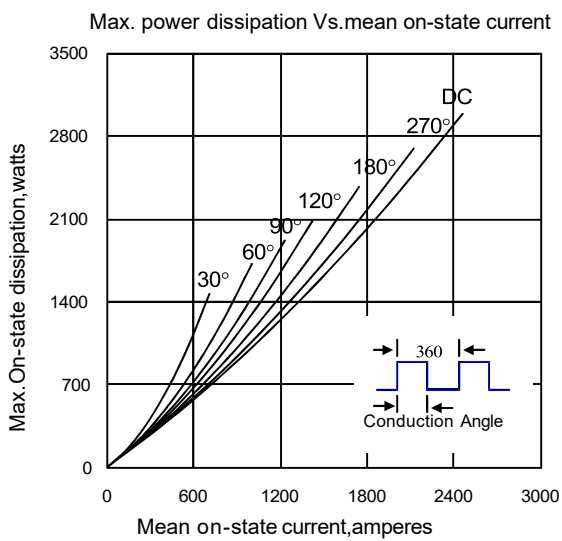


Fig5

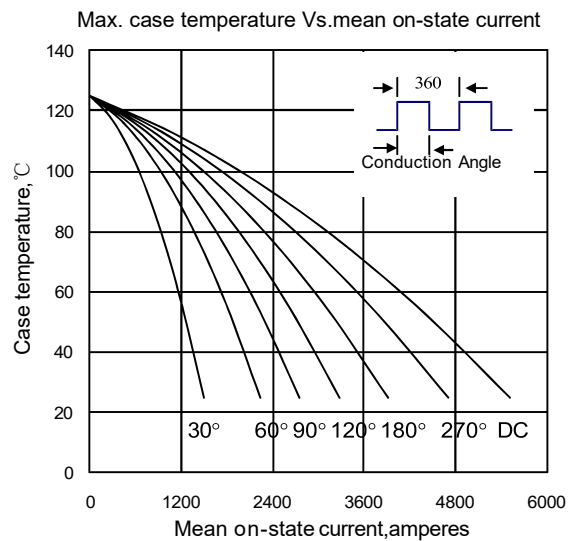


Fig6

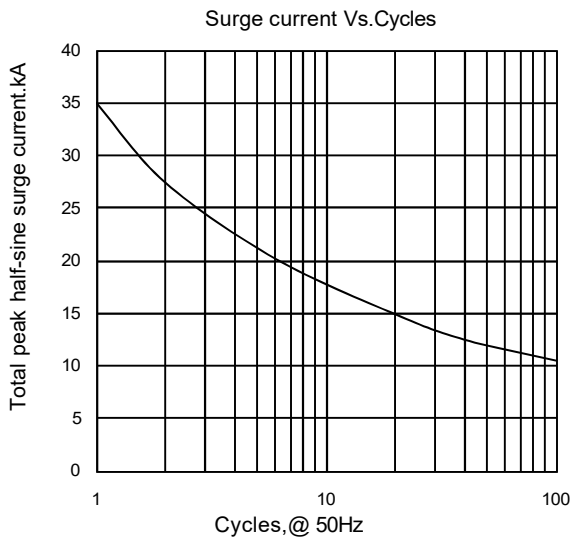


Fig.7


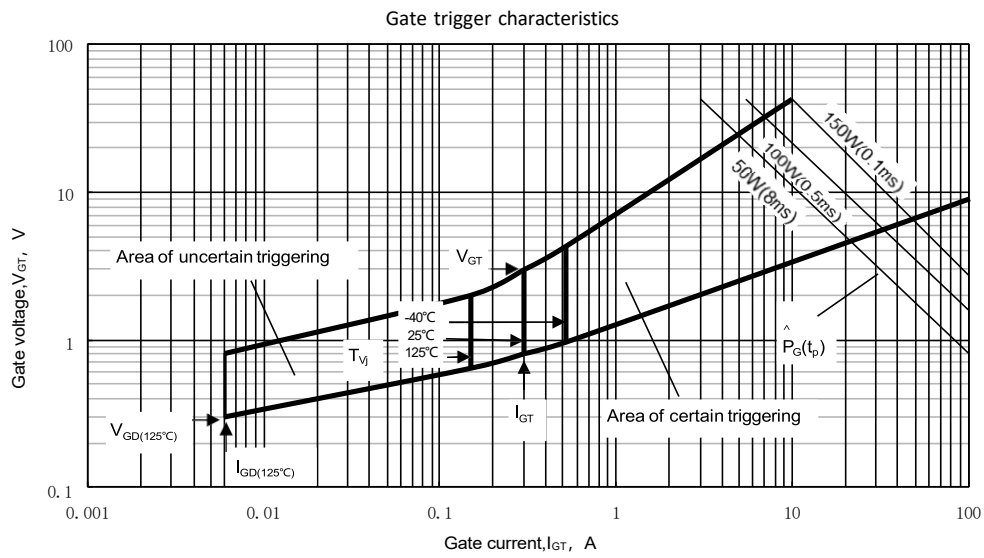


Fig. 8

Outline:

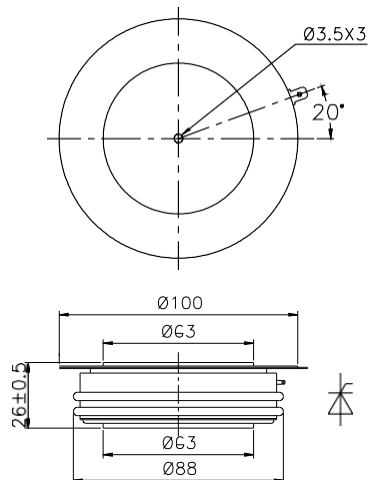

Nlps reserves the right to change specifications without notice.