

Features :

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

Typical Applications :

- AC controllers
- DC and AC motor control
- Controlled rectifiers

$I_{T(AV)}$	2500A
V_{DRM}/V_{RRM}	7000 ~ 8000V
I_{TSM}	40 kA
I^2t	8000 10³A²S

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T _j (°C)	VALUE			UNIT	
				Min	Type	Max		
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled	T _c =70°C	115		2500	A	
I_{DRM} I_{RRM}	Repetitive peak current	at V _{DRM} tp=10ms at V _{RRM} tp=10ms		115		600	mA	
I_{TSM}	Surge on-state current	10ms half sine wave		115		40	kA	
I^2t	I ² t for fusing coordination	V _R =0.6V _{RRM}				8000	10 ³ A ² s	
V _{TO}	Threshold voltage			115		1.20	V	
r _T	On-state slope resistance					0.31	mΩ	
V _{TM}	Peak on-state voltage	I _{TM} =1500A, F=90kN		25		1.60	V	
dv/dt	Critical rate of rise of off-state voltage	V _{DM} =0.67V _{DRM}		115		2000	V/μs	
di/dt	Critical rate of rise of on-state current	V _{DM} =67%V _{DRM} , Gate pulse t _r ≤ 0.5μs I _{GM} =1.5A		115		200	A/μs	
Q _{rr}	Recovery charge	I _{TM} =2000A, tp=4000μs, di/dt=-5A/μs, V _R =100V		115	5000		μC	
I _{GT}	Gate trigger current			25	40	300	mA	
V _{GT}	Gate trigger voltage	V _A =12V, I _A =1A			0.8	3.0	V	
I _H	Holding current				25	200	mA	
V _{GD}	Non-trigger gate voltage	V _{DM} =67%V _{DRM}		115		0.3	V	
R _{th(j-c)}	Thermal resistance Junction to case	D.C. Double side cooled				0.0057	°C/W	
R _{th(c-h)}	Thermal resistance case to heatsink	Clamping force 90kN				0.0015		
F _m	Mounting force				81	90	108	kN
T _{vj}	Junction temperature				-40	115	°C	
T _{stg}	Stored temperature				-40	140	°C	
W _t	Weight					2500	g	
Outline	P30							

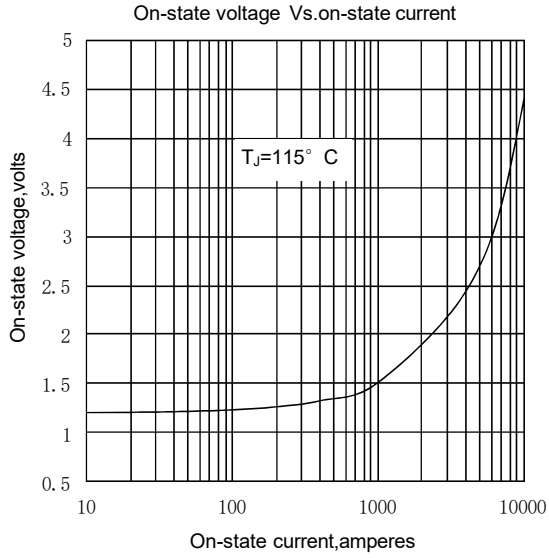


Fig.1

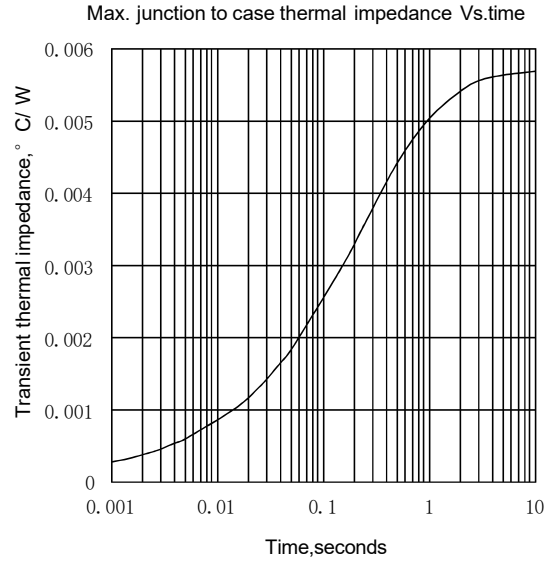


Fig.2

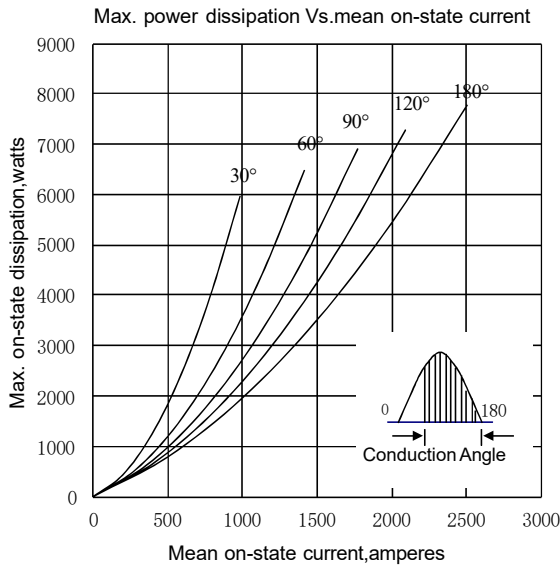


Fig.3

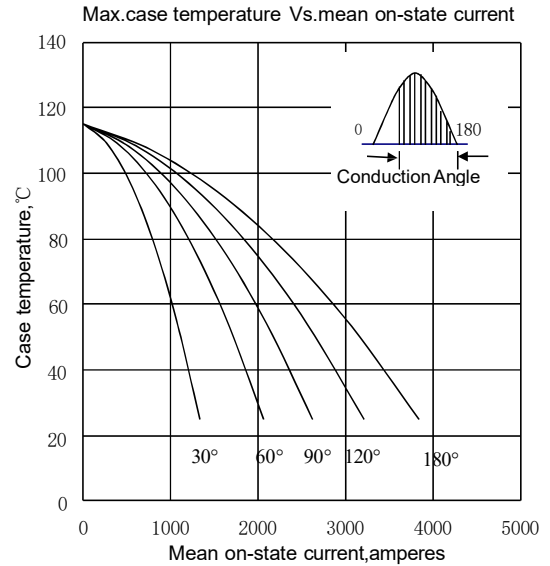


Fig.4

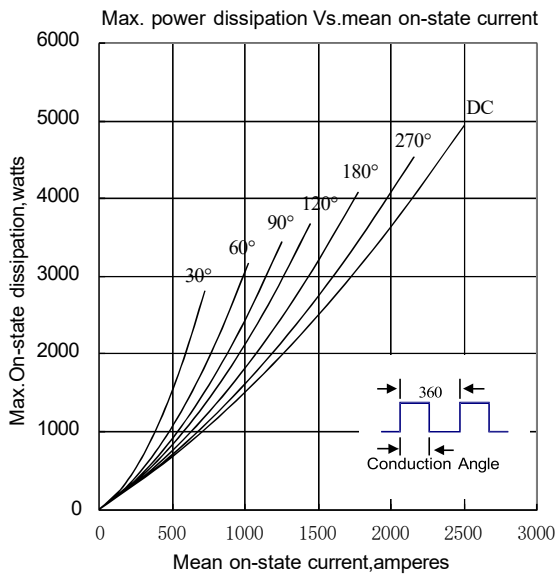


Fig.5

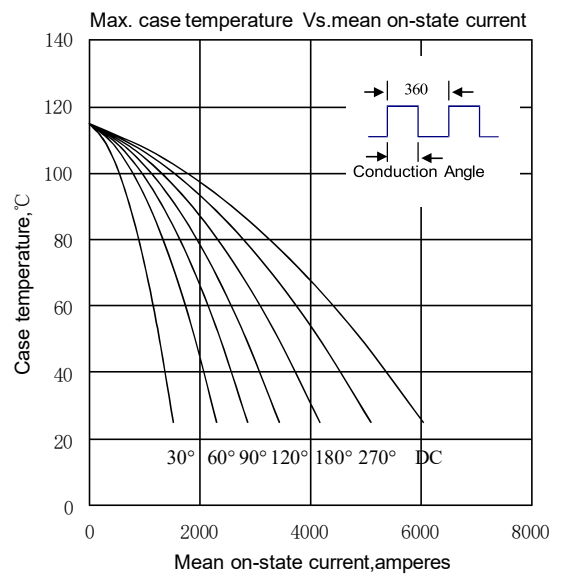


Fig.6

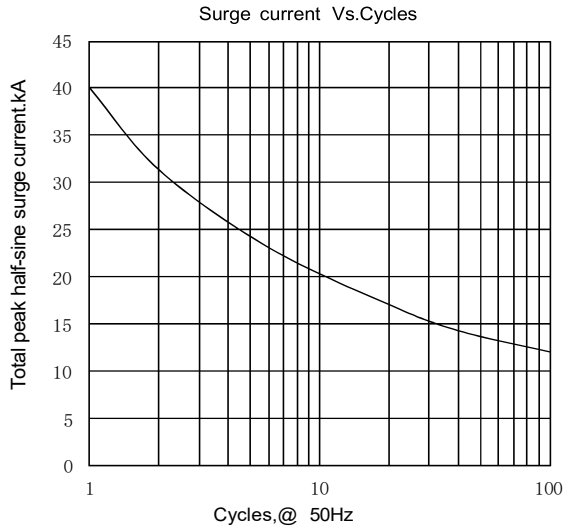


Fig.7


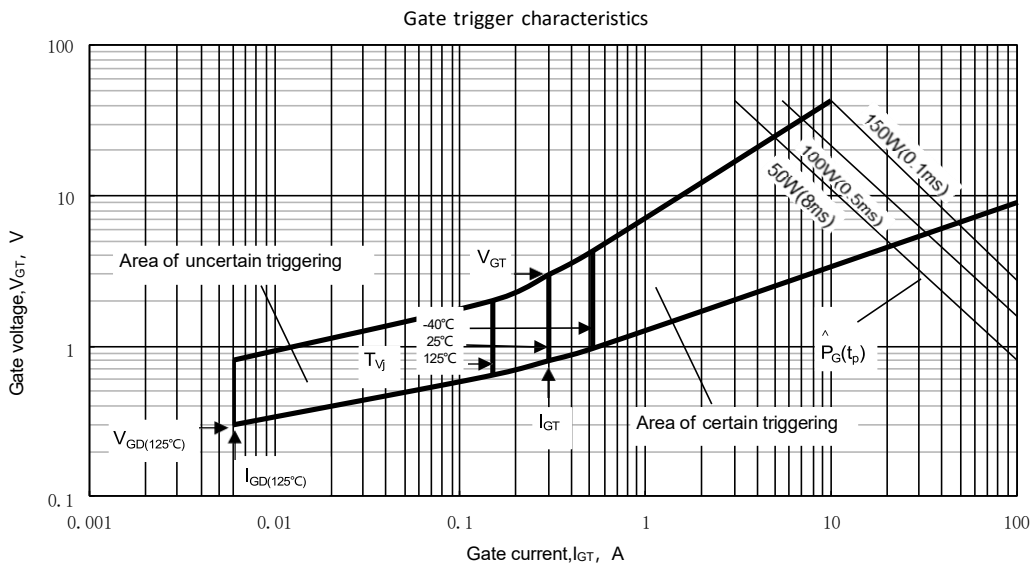


Fig.8

Outline:

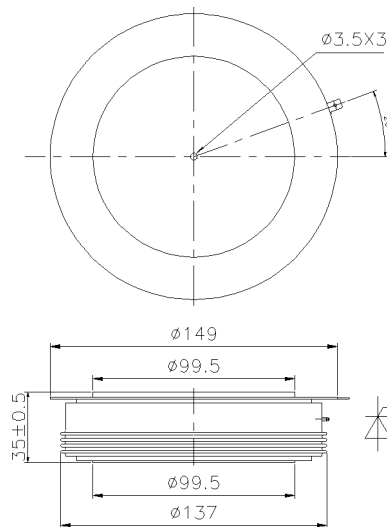

Nlps reserves the right to change specifications without notice.