

**Features**

- Interdigitated amplifying gates
- Fast turn-on and high  $dI/dt$
- Low switching losses

 **$I_{T(AV)}$  2830A** **$V_{DRM}/V_{RRM}$  800~1800V** **$t_q$  30~60 $\mu$ s****Typical Applications**

- Inductive heating
- Electronic welders
- Self-commutated inverters

 **$I_{TSM}$  31 kA** **$I^2t$  4805 10<sup>3</sup>A<sup>2</sup>S**

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}\text{C})$	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled, $T_c=55^{\circ}\text{C}$	125			2830	A
$V_{DRM}$ $V_{RRM}$	Repetitive peak off-state voltage Repetitive peak reverse voltage	$t_p=10\text{ms}$	125	800		1800	V
$I_{DRM}$ $I_{RRM}$	Repetitive peak current	at $V_{DRM}$ at $V_{RRM}$	125			200	mA
$I_{TSM}$	Surge on-state current	10ms half sine wave $V_R=0.6V_{RRM}$	125			31	kA
$I^2t$	$I^2t$ for fusing coordination					4805	$\text{A}^2\text{s} \times 10^3$
$V_{TO}$	Threshold voltage		125			1.22	V
$r_T$	On-state slope resistance					0.18	mΩ
$V_{TM}$	Peak on-state voltage	$I_{TM}=4000\text{A}, F=40\text{kN}$	125			1.94	V
$dv/dt$	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			500	V/ $\mu$ s
$di/dt$	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$ to 3000A Gate pulse $t_r \leq 0.5\mu\text{s}$ $I_{GM}=1.5\text{A}$	125			1200	A/ $\mu$ s
$Q_{rr}$	Recovery charge	$I_{TM}=2000\text{A}, t_p=200\mu\text{s},$ $di/dt=-60\text{A}/\mu\text{s}, V_R=50\text{V}$	125		1000		$\mu\text{C}$
$t_q$	Circuit commutated turn-off time	$I_{TM}=2000\text{A}, t_p=200\mu\text{s}, V_R=50\text{V}$ $dv/dt=30\text{V}/\mu\text{s}, di/dt=-60\text{A}/\mu\text{s}$	125	30		60	$\mu\text{s}$
$I_{GT}$	Gate trigger current	$V_A=12\text{V}, I_A=1\text{A}$	25	40		450	mA
$V_{GT}$	Gate trigger voltage			0.9		4.5	V
$I_H$	Holding current			20		1000	mA
$V_{GD}$	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125	0.3			V
$R_{th(j-c)}$	Thermal resistance Junction to case	DC double side cooled Clamping force 40kN				0.010	$^{\circ}\text{C}/\text{W}$
$R_{th(c-h)}$	Thermal resistance case to heat sink					0.003	
$F_m$	Mounting force			35		47	kN
$T_{stg}$	Stored temperature			-40		140	$^{\circ}\text{C}$
$W_t$	Weight				1100		g
Outline		P17					

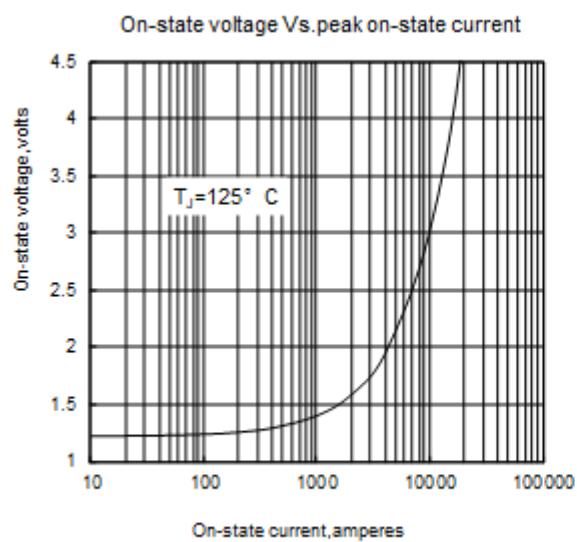


Fig1

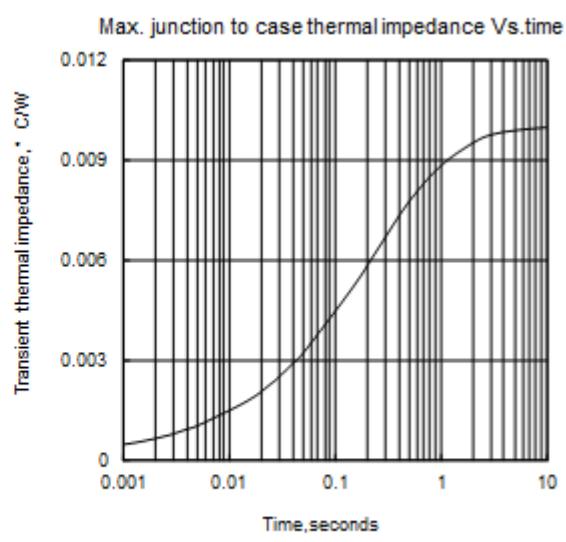


Fig2

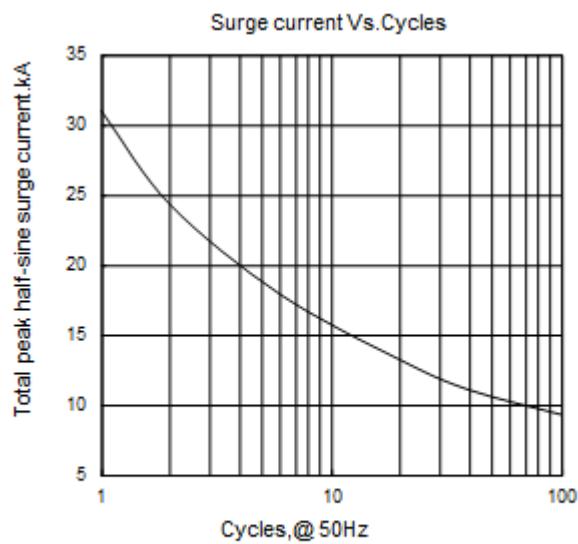


Fig3

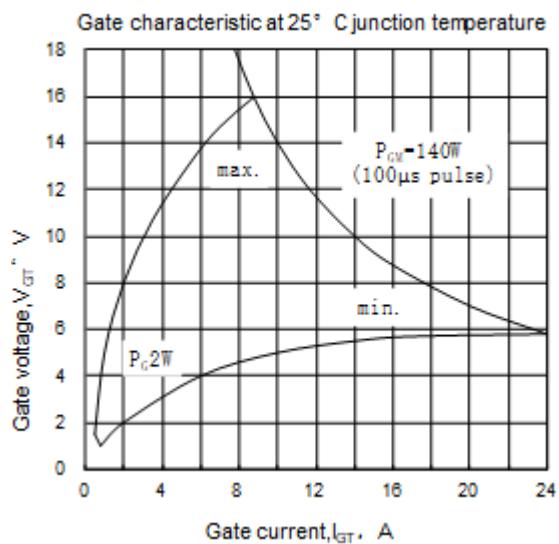


Fig4

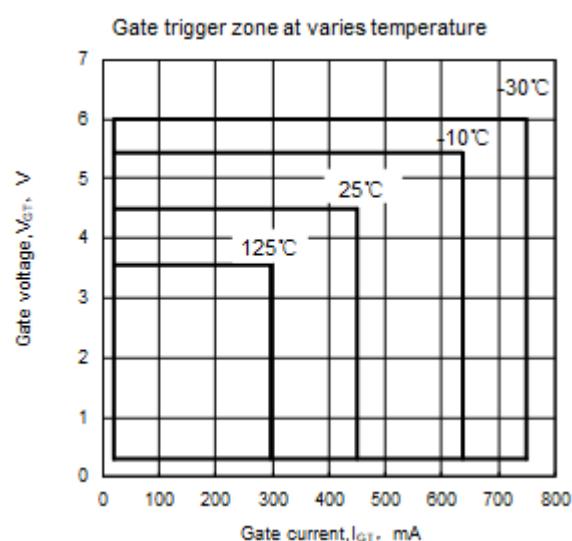


Fig5

