

Features

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

$I_{T(AV)}$ 320A
 V_{DRM}/V_{RRM} 6600 ~ 7200V
 I_{TSM} 4.0 kA
 I^2t 80 10³A²S

SYMBOL	CHARACTERISTIC	TEST CONDITIONS		T _J (°C)	VALUE			UNIT
					Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled	T _C =70°C	125			320	A
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	tp=10ms		125	6600		7200	V
I_{DRM} I_{RRM}	Repetitive peak current	at V_{DRM} at V_{RRM}		125			150	mA
I_{TSM}	Surge on-state current	10ms half sine wave $V_R=0.6V_{RRM}$		125			4.0	kA
I^2t	I^2t for fusing coordination						80	A ² s*10 ³
V_{TO}	Threshold voltage			125			1.13	V
r_T	On-state slope resistance						3.10	mΩ
V_{TM}	Peak on-state voltage	$I_{TM}=500A, F=15kN$		25			2.90	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$		125			2000	V/μs
di/dt	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$ to1300A, Gate pulse t _r ≤0.5μs I _{GM} =1.5A		125			100	A/μs
Q _r	Recovery charge	$I_{TM}=2000A, tp=4000μs, di/dt=-5A/μs,$ $V_R=100V$		125		2500		μC
I_{GT}	Gate trigger current	$V_A=12V, I_A=1A$		25	30		300	mA
V_{GT}	Gate trigger voltage				0.8		3.0	V
I_H	Holding current				20		200	mA
I_L	Latching current						500	mA
V_{GD}	Non-trigger gate voltage	$V_{DM}=0.67V_{DRM}$		125			0.3	V
$R_{th(j-c)}$	Thermal resistance Junction to case	D.C. double side cooled Clamping force15kN					0.045	°C/W
$R_{th(c-h)}$	Thermal resistance case to heatsink						0.008	°C/W
F_m	Mounting force				10	15	20	kN
T _{vj}	Junction temperature				-40		125	°C
T _{stg}	Stored temperature				-40		140	°C
W _t	Weight					300		g
Outline	P23							

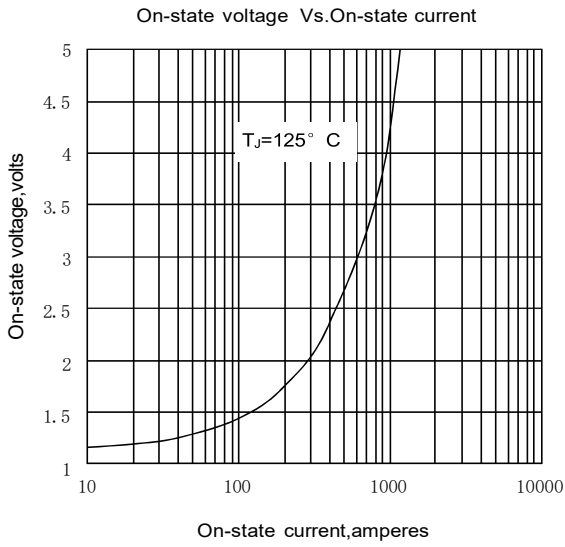


Fig.1

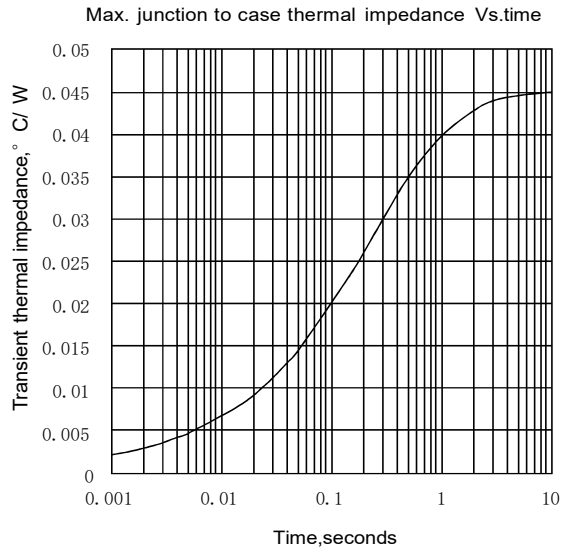


Fig.2

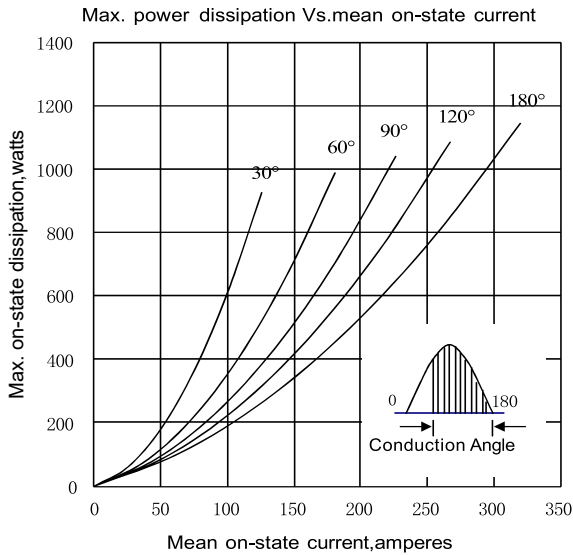


Fig.3

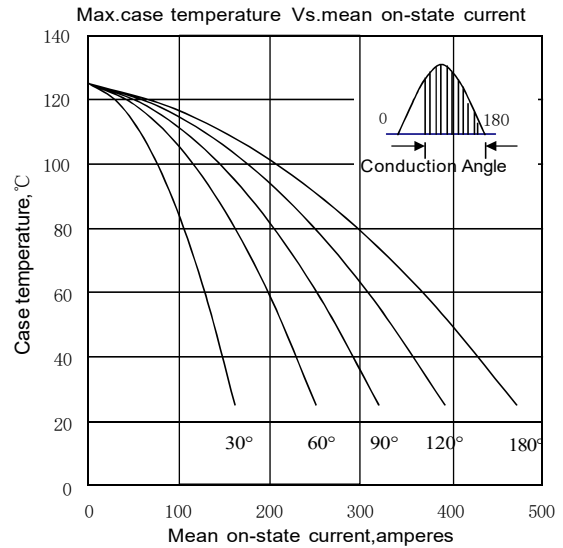


Fig.4

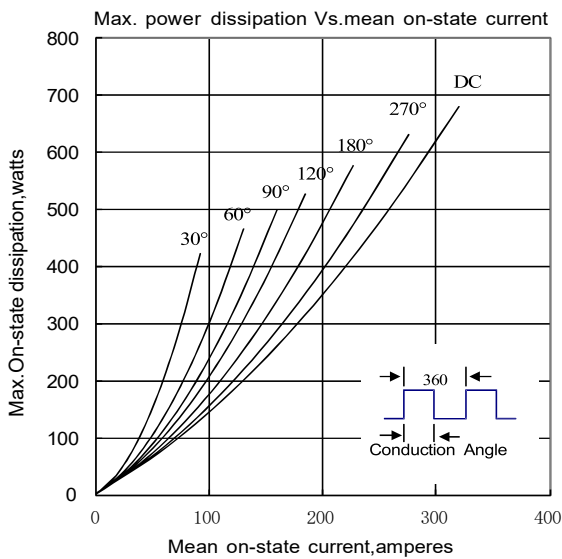


Fig5

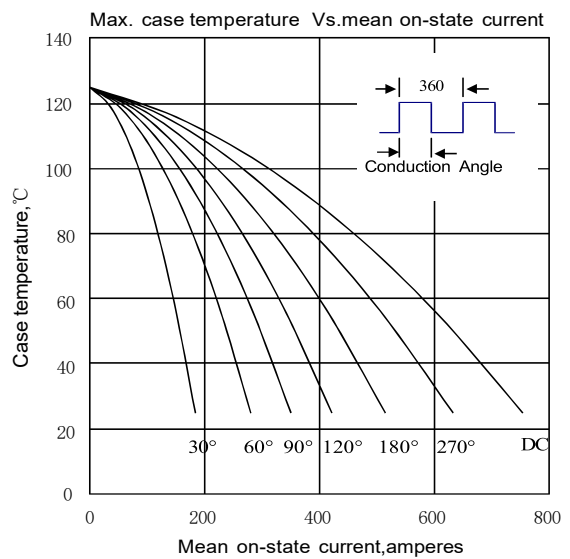


Fig6

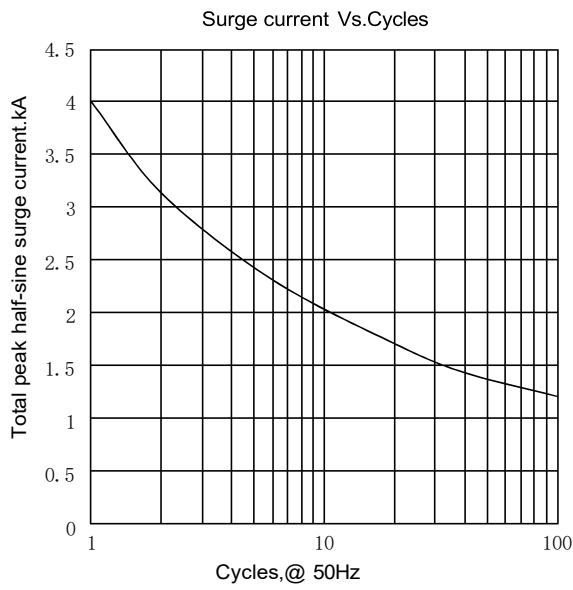


Fig.7


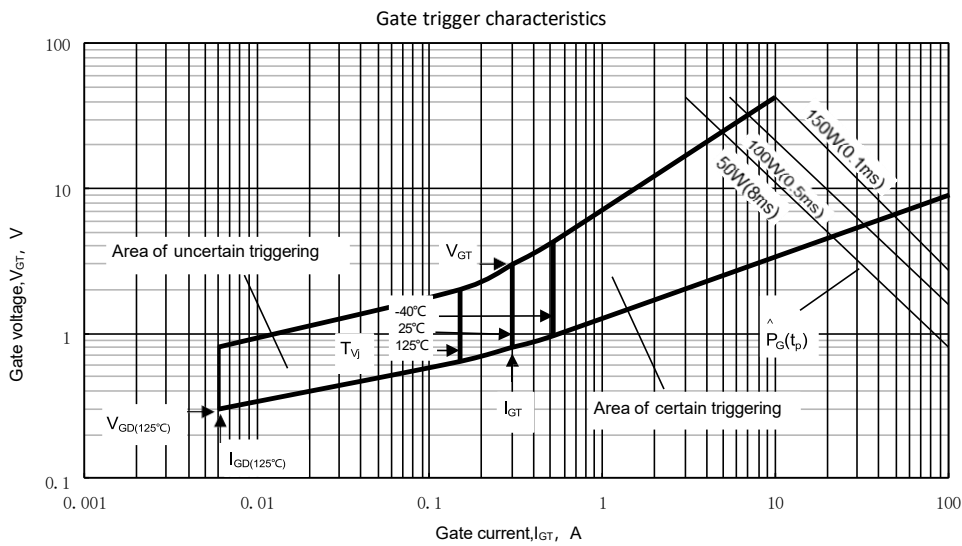


Fig.8

Outline:

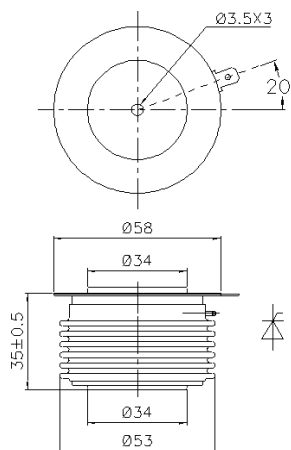

Nlps reserves the right to change specifications without notice.