

**Features :**

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

**$I_{T(AV)}$  3890A**  
 **$V_{DRM}/V_{RRM}$  3600 ~ 4500V**

**Typical Applications :**

- AC controllers
- DC and AC motor control
- Controlled rectifiers

**$I_{TSM}$  60 kA**  
 **$I^2t$  18000  $10^3A^2s$**

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}C)$	VALUE			UNIT	
				Min	Type	Max		
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled	$T_c=70^{\circ}C$	125			3890	A
			$T_c=55^{\circ}C$	125			4500	A
$V_{DRM}$ $V_{RRM}$	Repetitive peak off-state voltage Repetitive peak reverse voltage	$t_p=10ms$	125	3600		4500	V	
$I_{DRM}$ $I_{RRM}$	Repetitive peak current	at $V_{DRM}$ at $V_{RRM}$	125			400	mA	
$I_{TSM}$	Surge on-state current	10ms half sine wave	125			60	kA	
$I^2t$	$I^2t$ for fusing coordination	$V_R=0.6V_{RRM}$					18000	$10^3A^2s$
$V_{TO}$	Threshold voltage		125			0.95	V	
$r_T$	On-state slope resistance						0.16	mΩ
$V_{TM}$	Peak on-state voltage	$I_{TM}=3000A, F=90kN$	25			1.52	V	
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			2000	V/μs	
di/dt	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$ , Gate pulse $t_r \leq 0.5\mu s$ $I_{GM}=1.5A$	125			200	A/μs	
$Q_{rr}$	Recovery charge	$I_{TM}=2000A, t_p=4000\mu s, di/dt=-5A/\mu s$ , $V_R=100V$	125		8000		μC	
$I_{GT}$	Gate trigger current	$V_A=12V, I_A=1A$	25	40		300	mA	
$V_{GT}$	Gate trigger voltage			0.8		3.0	V	
$I_H$	Holding current			25		200	mA	
$I_L$	Latching current					1000	mA	
$V_{GD}$	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125			0.3	V	
$R_{th(j-c)}$	Thermal resistance Junction to case	D.C. double side cooled Clamping force 90kN				0.0057	°C/W	
$R_{th(c-h)}$	Thermal resistance case to heatsink					0.0015		
$F_m$	Mounting force			81		108	kN	
$T_{vj}$	Junction temperature			-40		125	°C	
$T_{slg}$	Stored temperature			-40		140	°C	
$W_t$	Weight				2500		g	
Outline	P30							

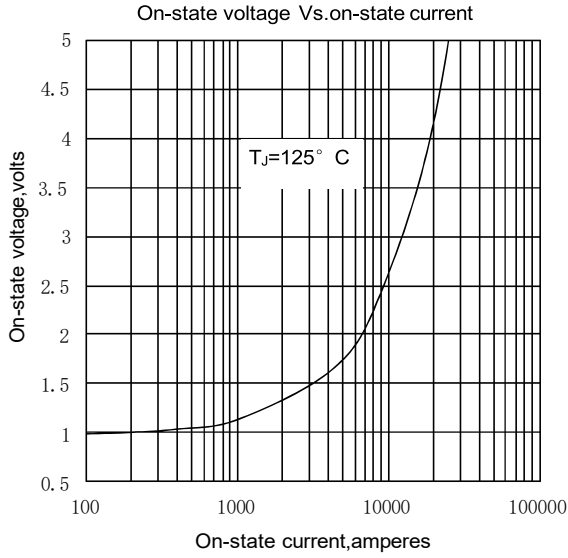


Fig.1

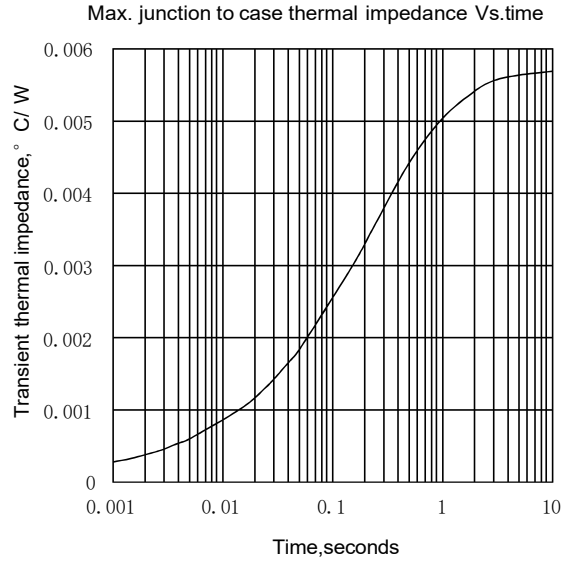


Fig.2

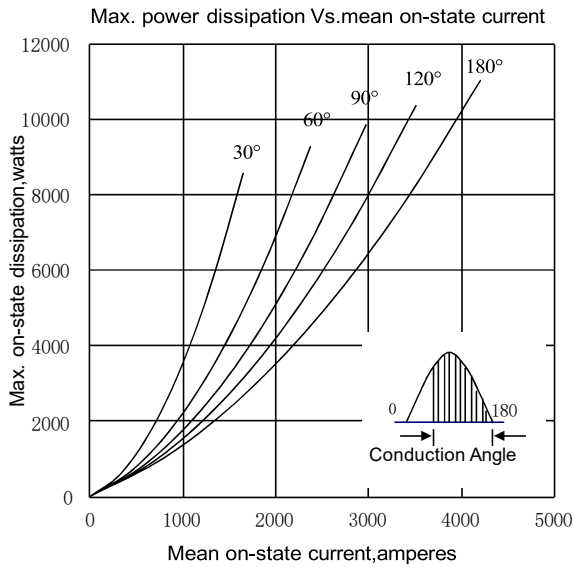


Fig.3

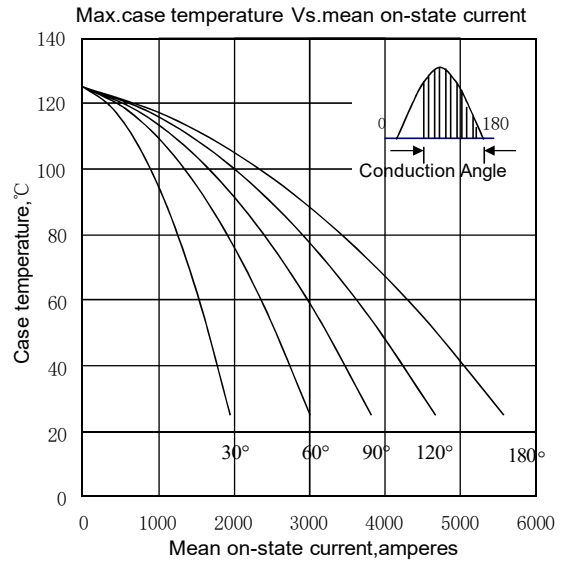


Fig.4

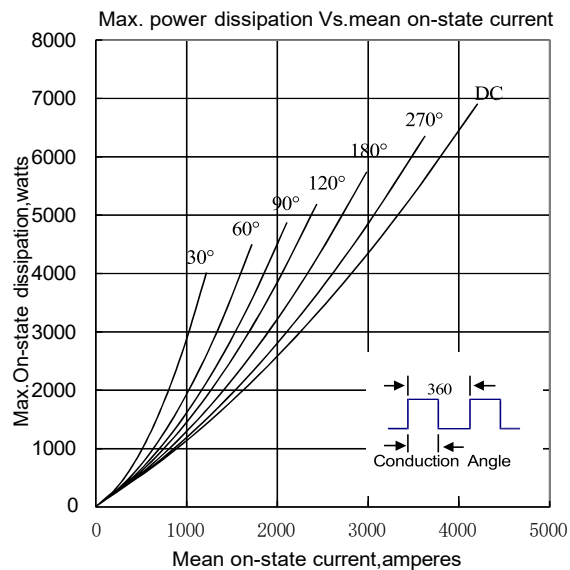


Fig.5

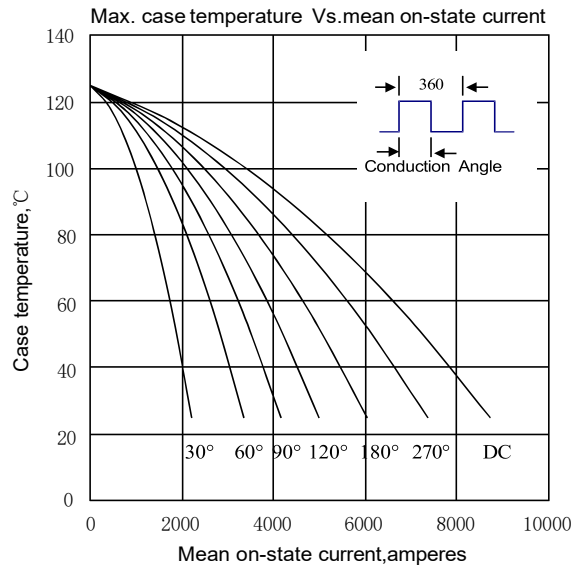


Fig.6

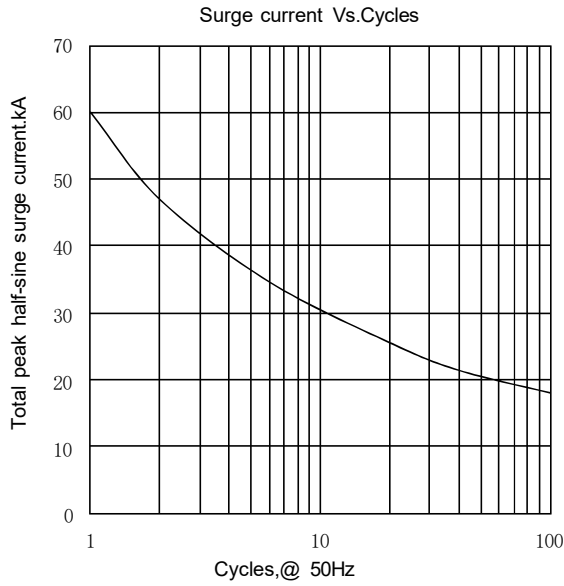


Fig.7


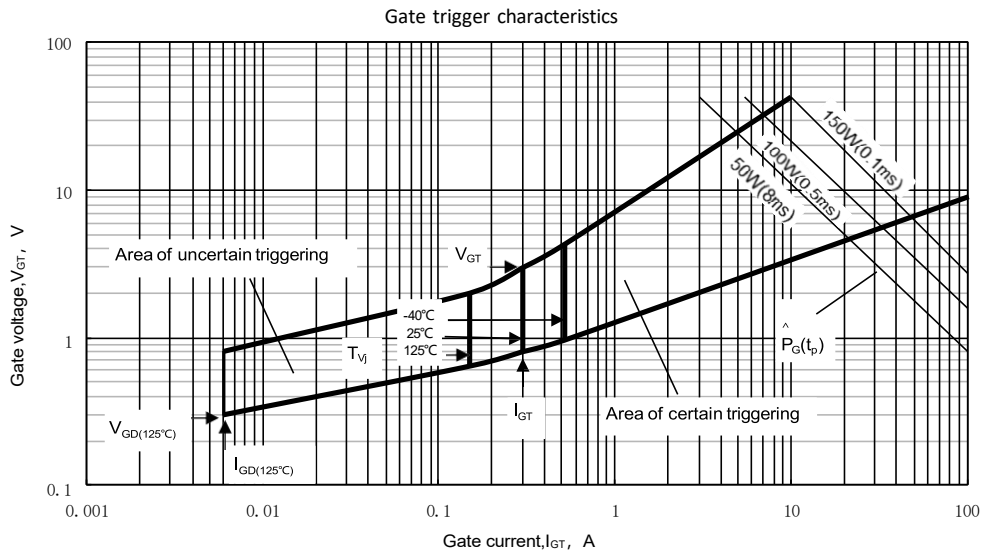


Fig.8

Outline:

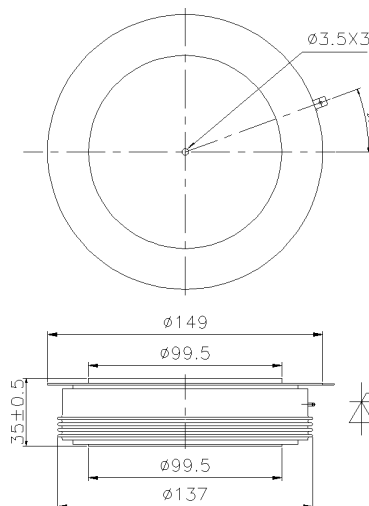

Nlps reserves the right to change specifications without notice.