

Features

- Low forward voltage drop
- High reverse voltage
- Hermetic metal cases with ceramic insulators

I_{F(AV)} 4380A
V_{RRM} 5100 ~ 6500V
I_{FSM} 57 kA
I²t 16200 10³A²S

Typical Applications

- All purpose high power rectifier diodes
- High power resistance welding equipment
- Non-controllable and half-controllable rectifiers
- Controlled rectifiers

SYMBOL	CHARACTERISTIC	TEST CONDITIONS		T _J (°C)	VALUE			UNIT
					Min	Type	Max	
I _{F(AV)}	Mean forward current	180° half sine wave 50Hz Double side cooled,	T _C =100°C	150			4380	A
V _{RRM}	Repetitive peak reverse voltage	tp=10ms		150	5100		6500	V
I _{RRM}	Repetitive peak current	at V _{RRM}		150			300	mA
I _{FSM}	Surge forward current	10ms half sine wave		150			57	kA
I ² t	I ² t for fusing coordination	V _R =0.6V _{RRM}					16200	A ² s*10 ³
V _{FO}	Threshold voltage			150			0.88	V
r _F	Forward slope resistance						0.16	mΩ
V _{FM}	Peak forward voltage	I _{FM} =5000A, F=108kN		25			1.70	V
Q _{rr}	Recovery charge	I _{FM} =2000A, tp=4000μs, di/dt=-20A/μs, V _R =100V		150		17000		μC
R _{th(j-c)}	Thermal resistance Junction to case	D.C. Double side cooled Clamping force 108kN					0.0057	°C /W
R _{th(c-h)}	Thermal resistance case to heat sink						0.0015	
F _m	Mounting force				81		108	kN
T _{vj}	Junction temperature				-40		150	°C
T _{stg}	Stored temperature				-40		160	°C
W _t	Weight					2020		g
Outline	P48a							

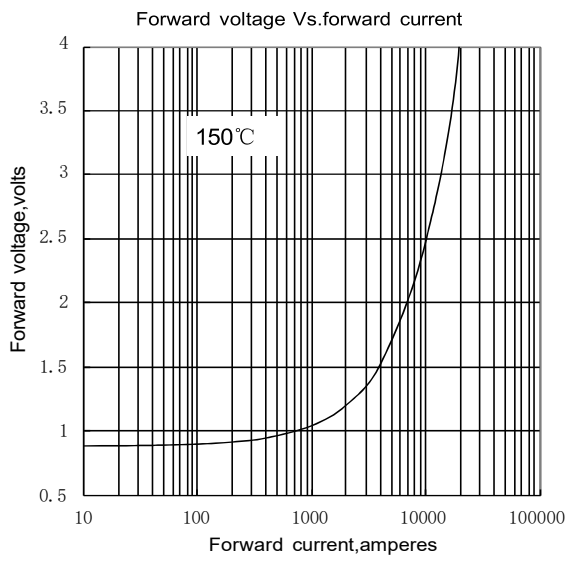


Fig.1

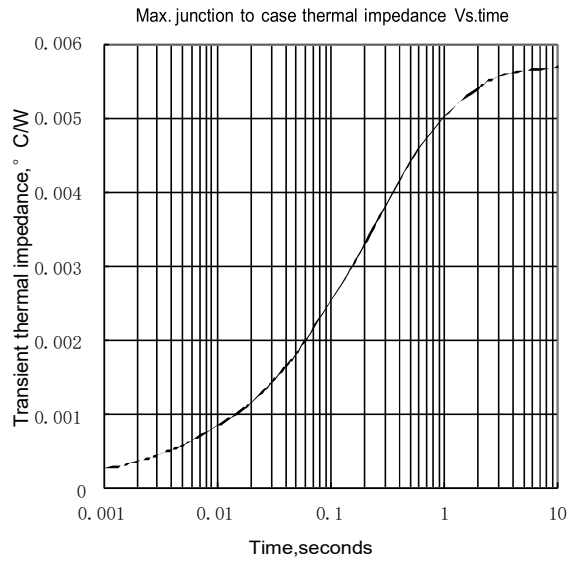


Fig.2

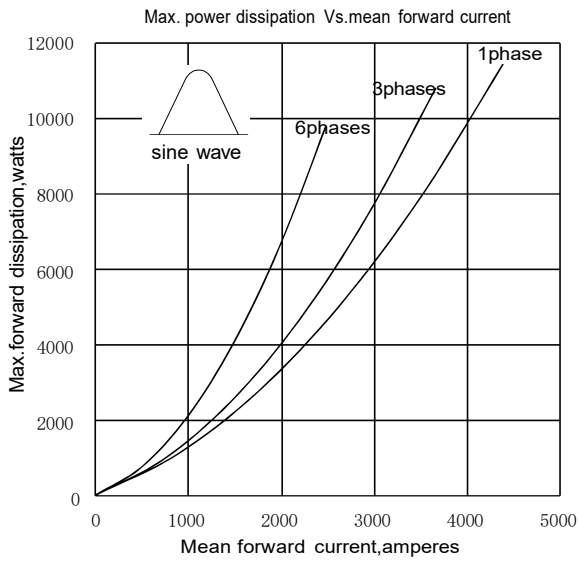


Fig.3

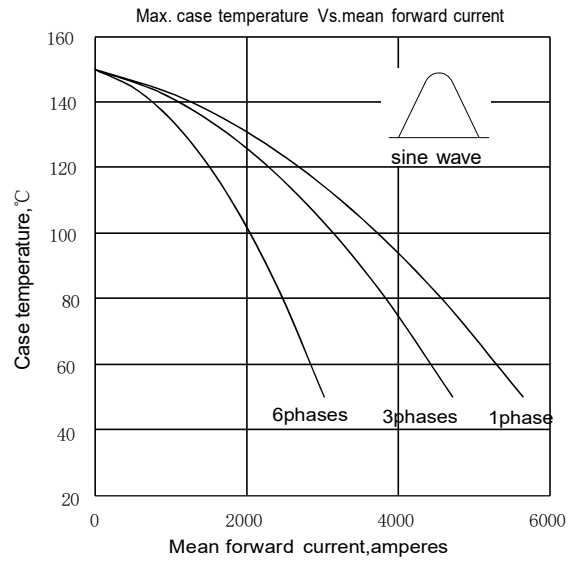


Fig.4

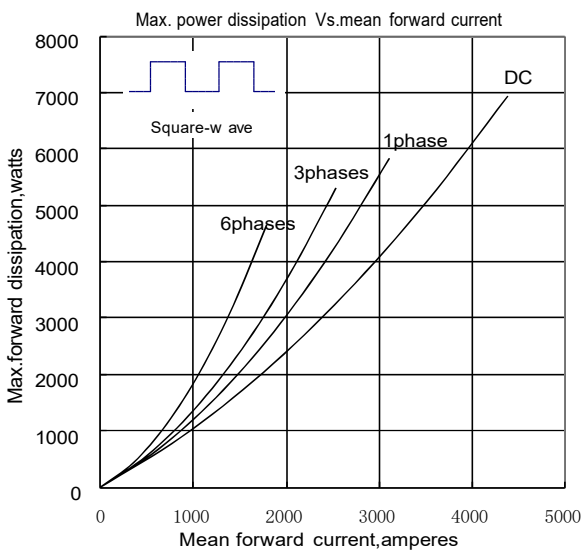


Fig.5

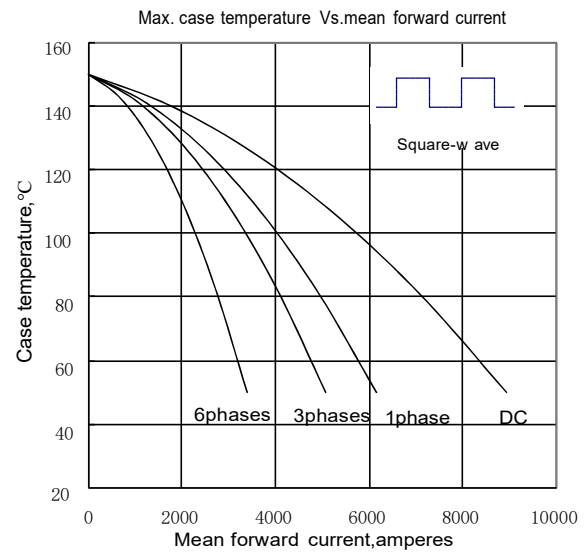


Fig.6

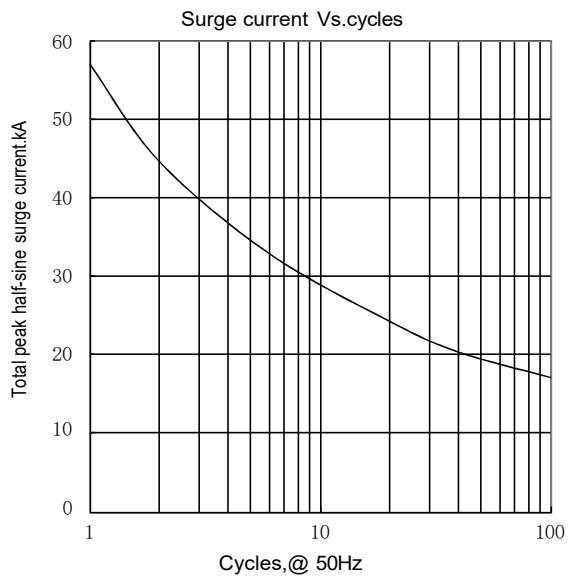


Fig.7

Outline:

