

## Features

- Low forward voltage drop
- High reverse voltage
- Hermetic metal cases with ceramic insulators

## Typical Applications

- All purpose high power rectifier diodes
- High power resistance welding equipment
- Non-controllable and half-controllable rectifiers
- Controlled rectifiers

$I_{F(AV)}$	<b>7230A</b>
$V_{RRM}$	<b>1100 ~ 2000V</b>
$I_{FSM}$	<b>83 kA</b>
$I^2t$	<b>34445 10<sup>3</sup>A<sup>2</sup>S</b>

SYMBOL	CHARACTERISTIC	TEST CONDITIONS		T <sub>J</sub> (°C)	VALUE			UNIT
					Min	Type	Max	
$I_{F(AV)}$	Mean forward current	180° half sine wave 50Hz Double side cooled,	T <sub>C</sub> =85°C	175			7230	A
$V_{RRM}$	Repetitive peak reverse voltage	tp=10ms		175	1100		2000	V
$I_{RRM}$	Repetitive peak current	at $V_{RRM}$		175			200	mA
$I_{FSM}$	Surge forward current	10ms half sine wave		175			83	kA
$I^2t$	$I^2t$ for fusing coordination	$V_R=0.6V_{RRM}$					34445	A <sup>2</sup> s*10 <sup>3</sup>
$V_{FO}$	Threshold voltage			175			0.80	V
$r_F$	Forward slope resistance						0.055	mΩ
$V_{FM}$	Peak forward voltage	$I_{FM}=5000A, F=70kN$		25			2.0	V
$Q_{rr}$	Recovery charge	$I_{FM}=2000A, tp=4000\mu s, di/dt=-20A/\mu s, V_R=100V$		175		6000		μC
$R_{th(j-c)}$	Thermal resistance Junction to case	D.C. double side cooled Clamping force 70kN					0.007	°C/W
$R_{th(c-h)}$	Thermal resistance case to heat sink					0.002		
$F_m$	Mounting force				63		84	kN
$T_{vj}$	Junction temperature				-40		175	°C
$T_{stg}$	Stored temperature				-40		175	°C
$W_t$	Weight					1390		g
Outline	P47							

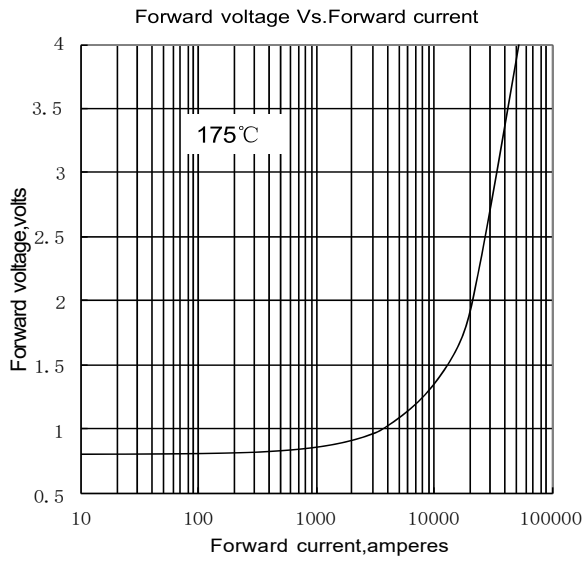


Fig.1

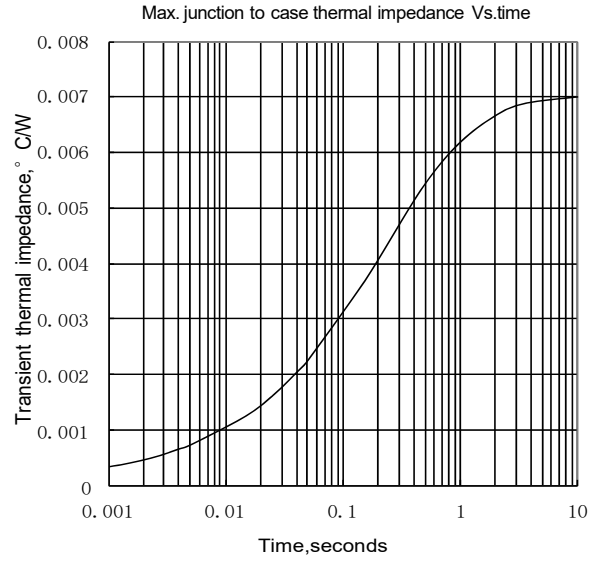


Fig.2

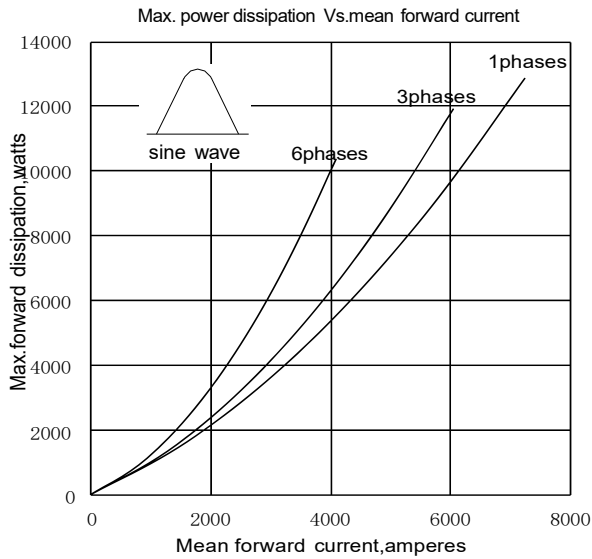


Fig.3

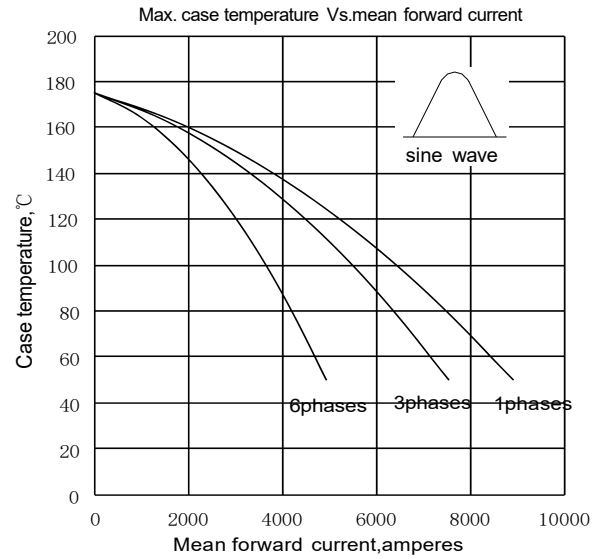


Fig.4

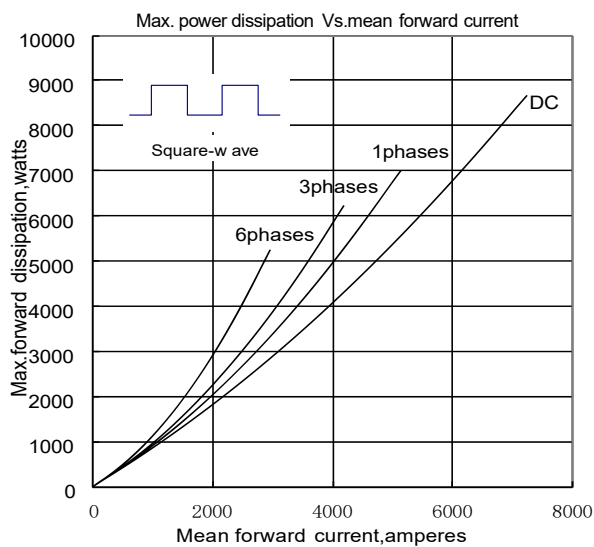


Fig.5

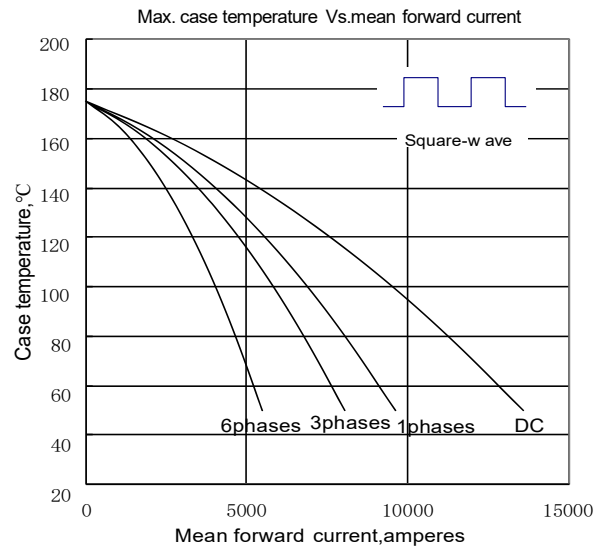


Fig.6

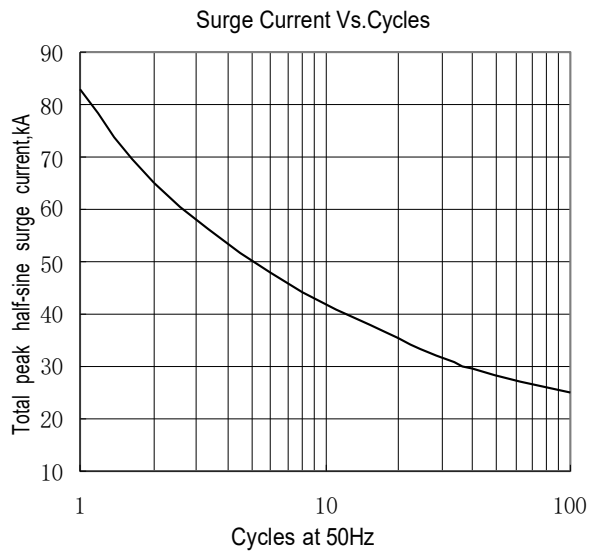


Fig.7

Outline:

