

Features :

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

$I_{T(AV)}$ **730A**
 V_{DRM}/V_{RRM} **6600 ~ 7200V**

Typical Applications :

- AC controllers
- DC and AC motor control
- Controlled rectifiers

I_{TSM} **10.5 kA**
 I^2t **551 10³A²s**

SYMBOL	CHARACTERISTIC	TEST CONDITIONS		T _j (°C)	VALUE			UNIT
					Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled	T _c =70°C	125			730	A
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	tp=10ms		125	6600		7200	V
I_{DRM} I_{RRM}	Repetitive peak current	at V_{DRM} tp=10ms at V_{RRM} tp=10ms		125			200	mA
I_{TSM}	Surge on-state current	10ms half sine wave		125			10.5	kA
I^2t	I^2t for fusing coordination	$V_R=0.6V_{RRM}$					551	10 ³ A ² s
V_{TO}	Threshold voltage			125			1.28	V
r_T	On-state slope resistance						1.32	mΩ
V_{TM}	Peak on-state voltage	$I_{TM}=1000A, F=24kN$		25			2.90	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$		125			2000	V/μs
di/dt	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$, Gate pulse t _r ≤ 0.5μs I _{GM} =1.5A		125			100	A/μs
Q _{rr}	Recovery charge	$I_{TM}=2000A, tp=4000μs, di/dt=-5A/μs$, $V_R=100V$		125		2900		μC
I_{GT}	Gate trigger current	$V_A=12V, I_A=1A$		25	40		300	mA
V_{GT}	Gate trigger voltage				0.8		3.0	V
I_H	Holding current				25		200	mA
I_L	Latching current						500	mA
V_{GD}	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$		125			0.3	V
$R_{th(j-c)}$	Thermal resistance Junction to case	D.C. double side cooled Clamping force 24kN					0.020	°C/W
$R_{th(c-h)}$	Thermal resistance case to heatsink						0.005	
F_m	Mounting force				19		26	kN
T _{vj}	Junction temperature				-40		125	°C
T _{slg}	Stored temperature				-40		140	°C
W _t	Weight					440		g
Outline	P11							

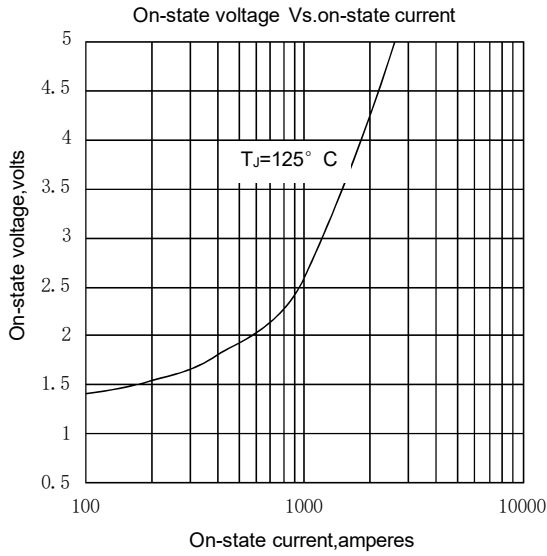


Fig.1

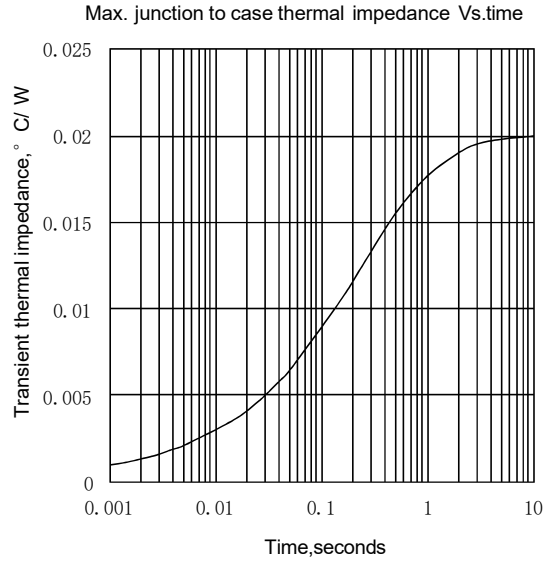


Fig.2

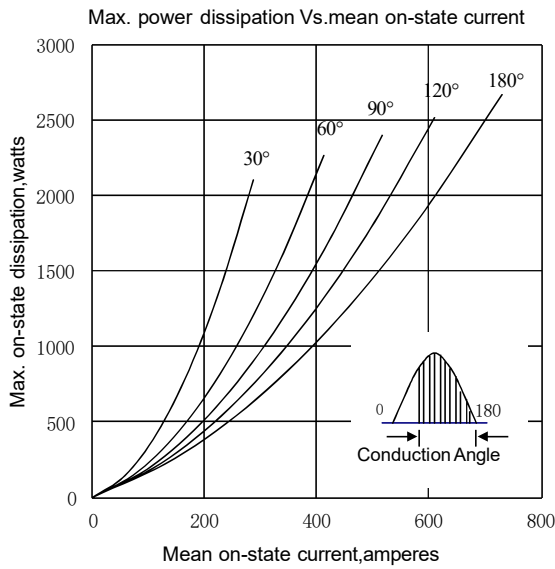


Fig.3

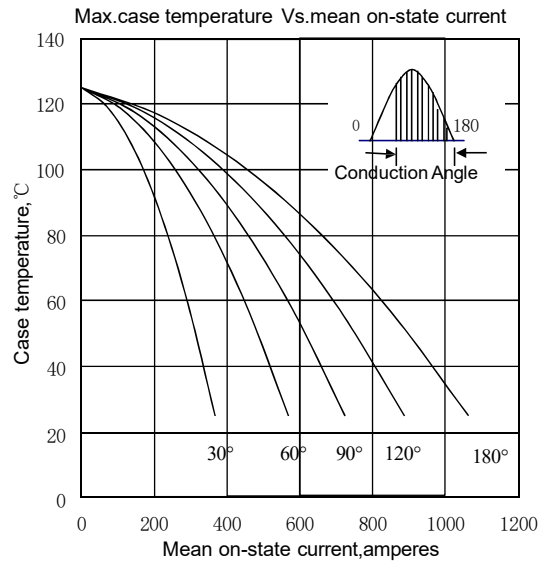


Fig.4

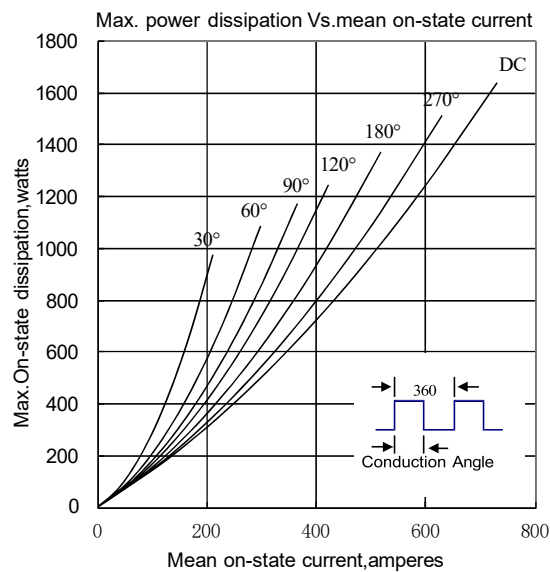


Fig.5

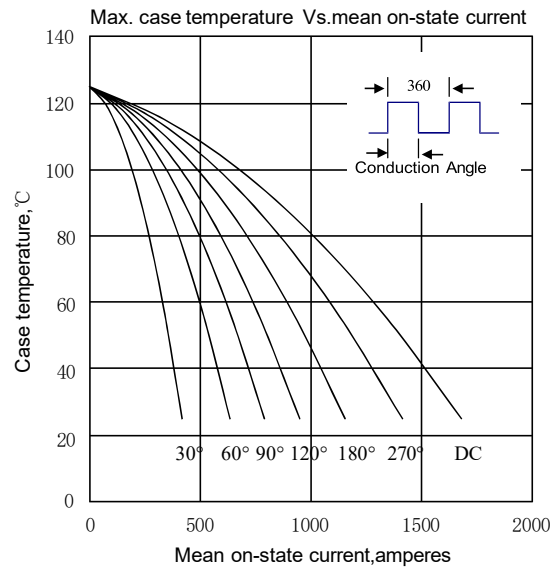


Fig.6

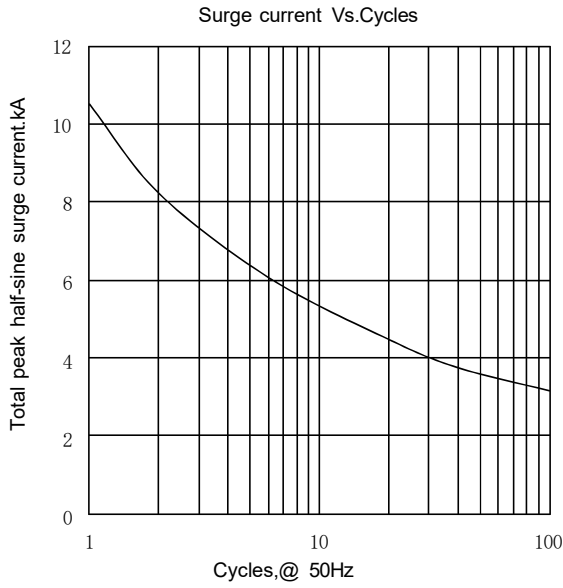


Fig.7


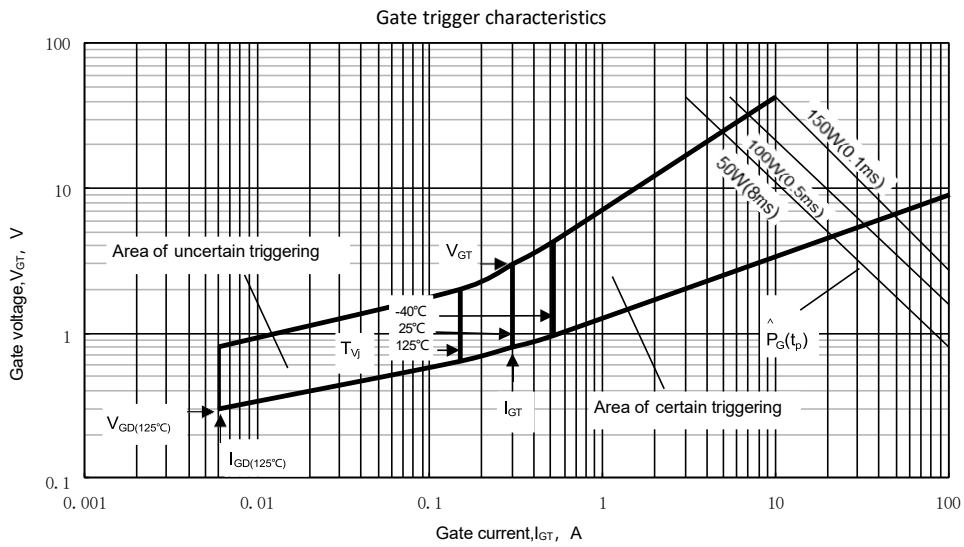


Fig.8

Outline:

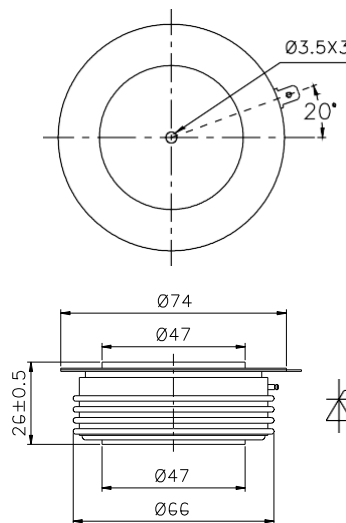

Nlps reserves the right to change specifications without notice.