

Features

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

$I_{T(AV)}$ **750A**
 V_{DRM}/V_{RRM} **1900 ~ 3000V**

Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

I_{TSM} **10 kA**
 I^2t **500 10³A²S**

| SYMBOL | CHARACTERISTIC | TEST CONDITIONS | | T _j (°C) | VALUE | | | UNIT |
|------------------------|--|--|----------------------|---------------------|-------|------|--------|----------------------------------|
| | | | | | Min | Type | Max | |
| $I_{T(AV)}$ | Mean on-state current | 180° half sine wave 50Hz Double side cooled, | T _c =70°C | 125 | | | 750 | A |
| V_{DRM} V_{RRM} | Repetitive peak off-state voltage Repetitive peak reverse voltage | tp=10ms | | 125 | 1900 | | 3000 | V |
| I_{DRM} I_{RRM} | Repetitive peak current | at V_{DRM} at V_{RRM} | | 125 | | | 50 | mA |
| I_{TSM} | Surge on-state current | 10ms half sine wave | | 125 | | | 10 | kA |
| I^2t | I^2t for fusing coordination | $V_R=0.6V_{RRM}$ | | | | | 500 | A ² s*10 ³ |
| V_{TO} | Threshold voltage | | | 125 | | | 1.2 | V |
| r_T | On-state slope resistance | | | | | | 0.78 | mΩ |
| V_{TM} | Peak on-state voltage | $I_{TM}=1500A, F=18kN$ | | 25 | | | 2.40 | V |
| dv/dt | Critical rate of rise of off-state voltage | $V_{DM}=0.67V_{DRM}$ | | 125 | | | 1000 | V/μs |
| di/dt | Critical rate of rise of on-state current | $V_{DM}=67\%V_{DRM}$ to 1000A, Gate pulse t _r ≤0.5μs I _{GM} =1.5A | | 125 | | | 100 | A/μs |
| Q _{rr} | Recovery charge | $I_{TM}=1000A, tp=4000μs, di/dt=-20A/μs,$ $V_R=100V$ | | 125 | | 1500 | | μC |
| I_{GT} | Gate trigger current | $V_A=12V, I_A=1A$ | | 25 | 40 | | 300 | mA |
| V_{GT} | Gate trigger voltage | | | | 0.8 | | 3.0 | V |
| I_H | Holding current | | | | 20 | | 250 | mA |
| I_L | Latching current | | | | | | 500 | mA |
| V_{GD} | Non-trigger gate voltage | $V_{DM}=0.67V_{DRM}$ | | 125 | | | 0.3 | V |
| $R_{th(j-c)}$ | Thermal resistance Junction to case | D.C.: double side cooled Clamping force 18kN | | | | | 0.0280 | °C/W |
| $R_{th(c-h)}$ | Thermal resistance case to heatsink | | | | | | 0.0075 | |
| F_m | Mounting force | | | | 15 | | 20 | kN |
| T _{vj} | Junction temperature | | | | -40 | | 125 | °C |
| T _{slg} | Stored temperature | | | | -40 | | 140 | °C |
| W _t | Weight | | | | | | 320 | g |
| Outline | P09 | | | | | | | |

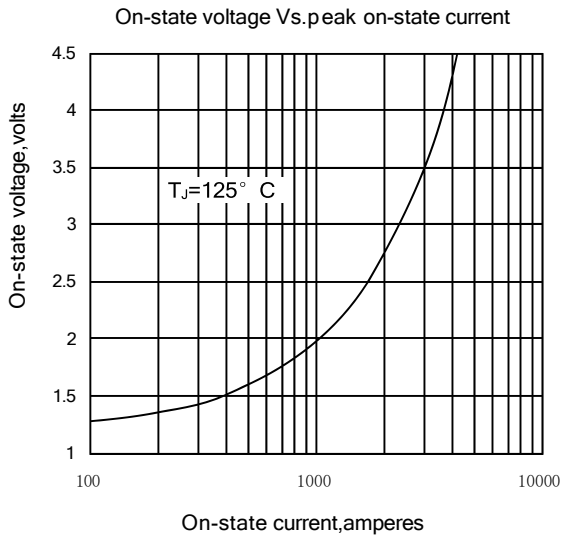


Fig1

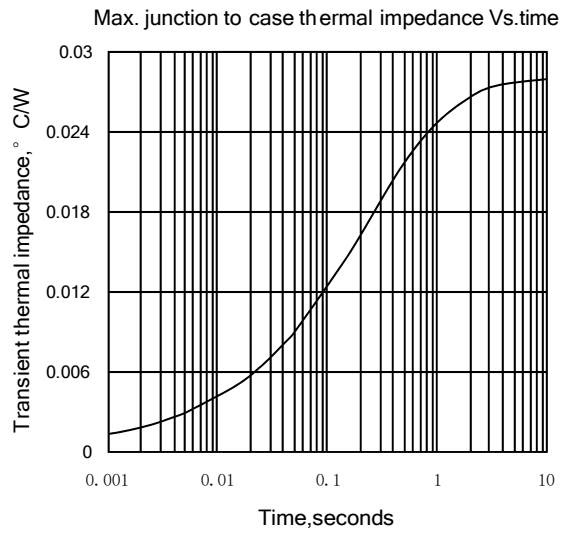


Fig2

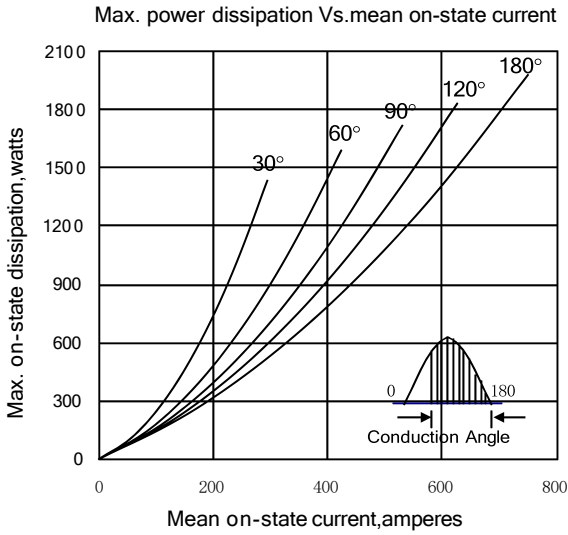


Fig3

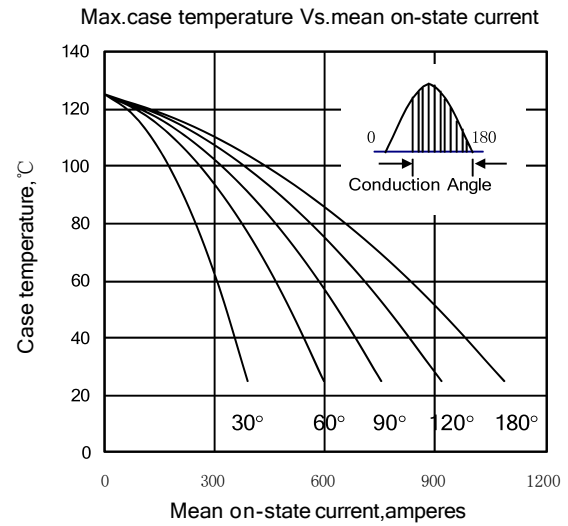


Fig4

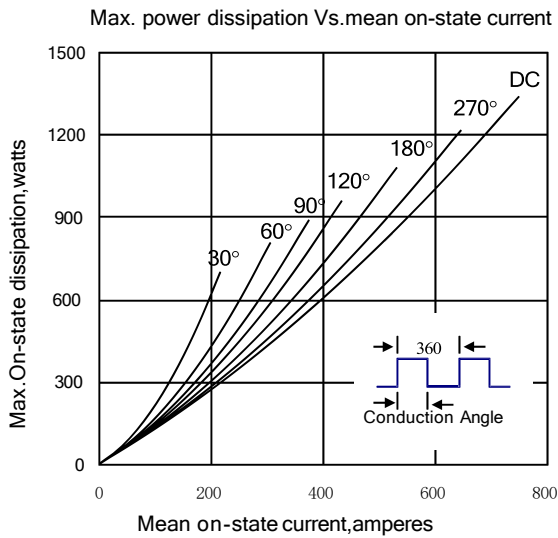


Fig5

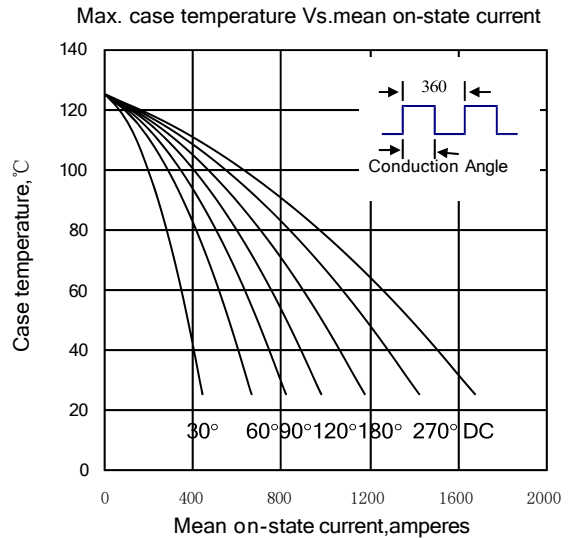


Fig6

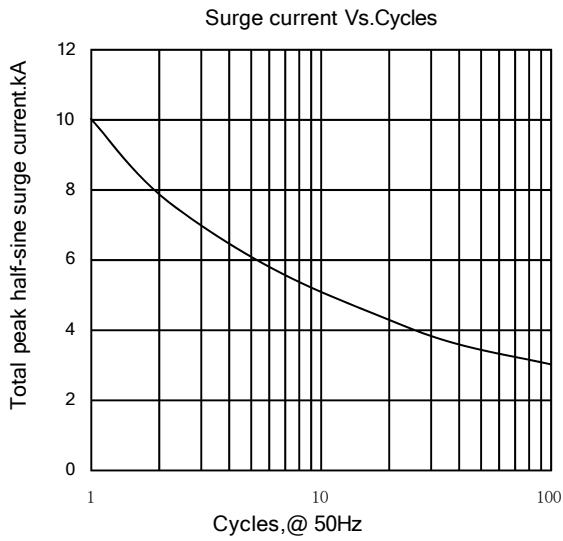


Fig7


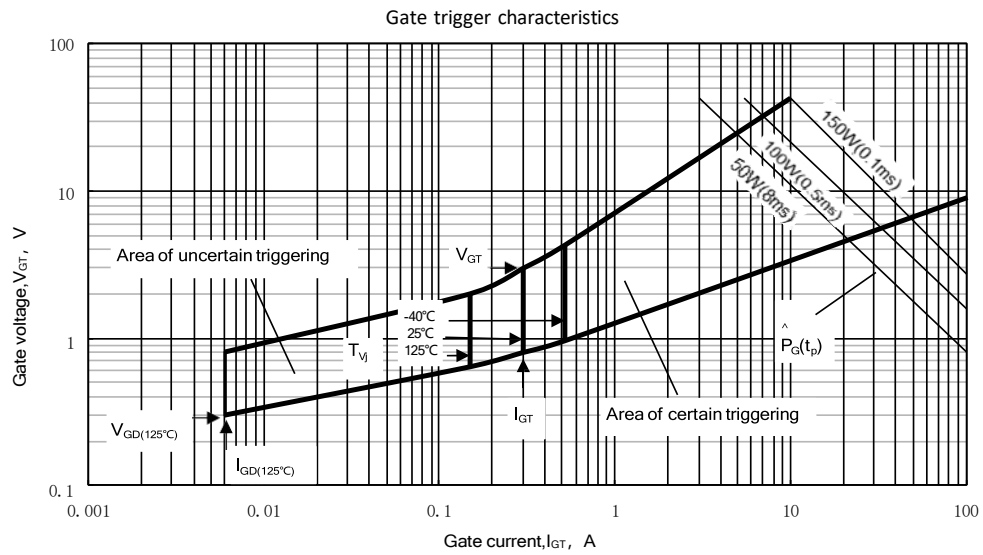


Fig. 8

Outline:

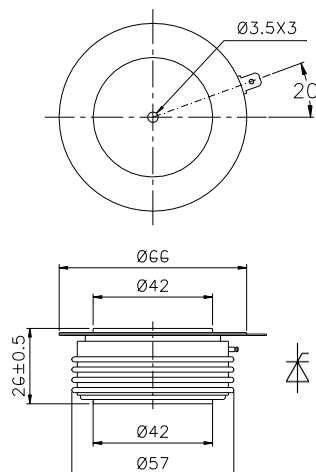

Nlps reserves the right to change specifications without notice.