

**Features**

- Low forward voltage drop
- High reverse voltage
- Hermetic metal cases with ceramic insulators

$I_{F(AV)}$     **7600A**  
 $V_{RRM}$     **200 ~ 1000V**  
 $I_{FSM}$     **72 kA**  
 $I^2t$         **25920 10<sup>3</sup>A<sup>2</sup>S**

**Typical Applications**

- All purpose high power rectifier diodes
- High power resistance welding equipment
- Non-controllable and half-controllable rectifiers

SYMBOL	CHARACTERISTIC	TEST CONDITIONS		T <sub>J</sub> (°C)	VALUE			UNIT
					Min	Type	Max	
$I_{F(AV)}$	Mean forward current	180° half sine wave 50Hz Double side cooled,	T <sub>C</sub> =85°C	190			7600	A
$V_{RRM}$	Repetitive peak reverse voltage	tp=10ms		190	200		1000	V
$I_{RRM}$	Repetitive peak current	at $V_{RRM}$		190			100	mA
$I_{FSM}$	Surge forward current	10ms half sine wave		190			72	kA
$I^2t$	$I^2t$ for fusing coordination	$V_R=0.6V_{RRM}$					25920	A <sup>2</sup> s*10 <sup>3</sup>
$V_{FO}$	Threshold voltage			190			0.67	V
$r_F$	Forward slope resistance						0.038	mΩ
$V_{FM}$	Peak on-state voltage	$I_{FM}=5000A, F=40kN$		25			1.24	V
$Q_{rr}$	Recovery charge	$I_{FM}=2000A, tp=4000\mu s, di/dt=-20A/\mu s, V_R=100V$		190		5000		μC
$R_{th(j-c)}$	Thermal resistance Junction to case	D.C. double side cooled Clamping force 40kN					0.010	°C/W
$R_{th(c-h)}$	Thermal resistance case to heat sink						0.003	
$F_m$	Mounting force				35		47	kN
$T_{vj}$	Junction temperature				-40		190	°C
$T_{stg}$	Stored temperature				-40		190	°C
$W_t$	Weight					1100		g
Outline	P46a							

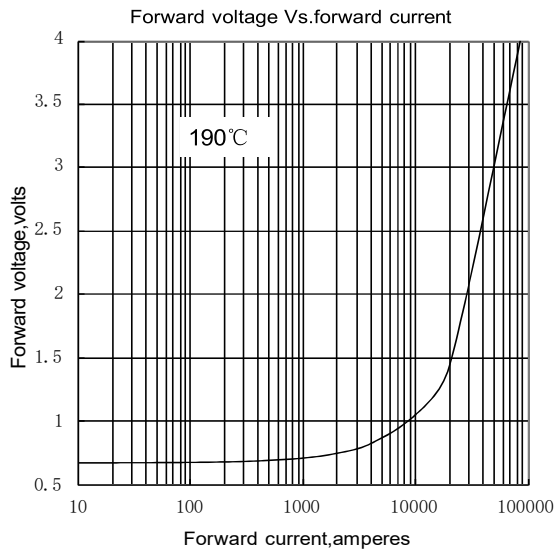


Fig.1

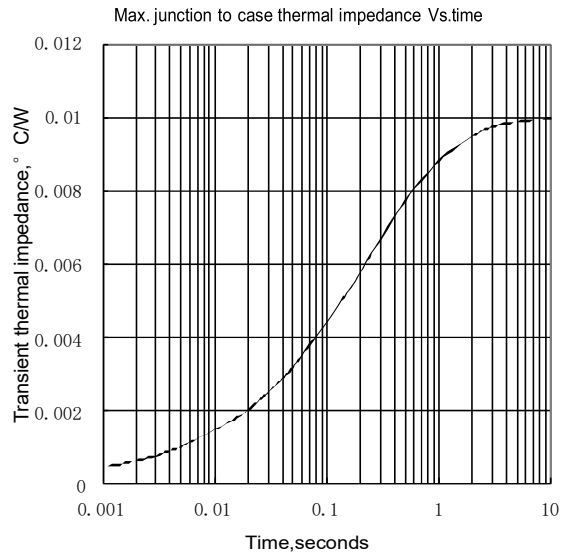


Fig.2

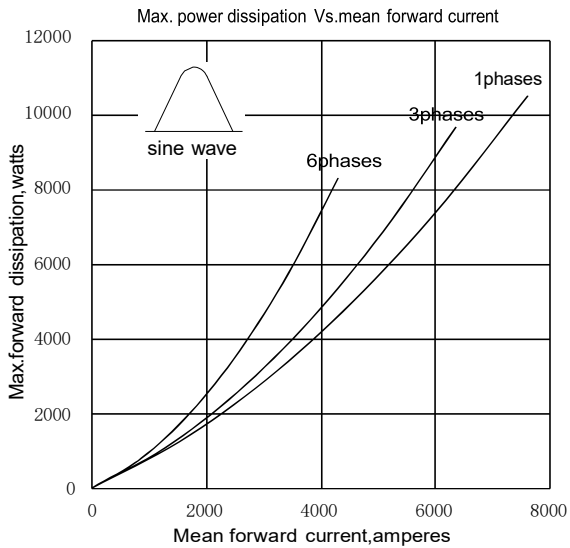


Fig.3

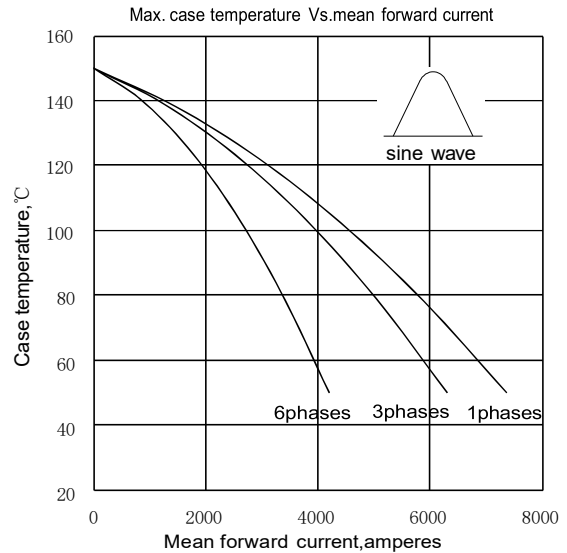


Fig.4

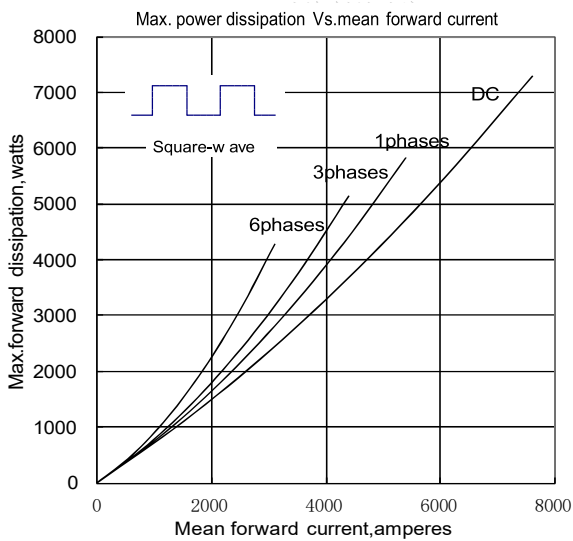


Fig.5

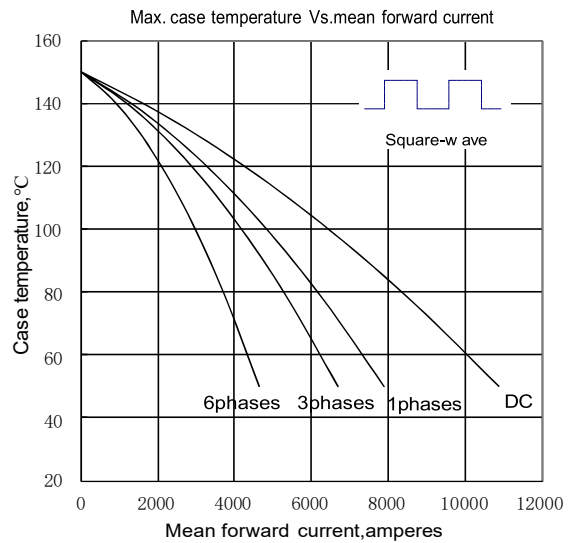


Fig.6

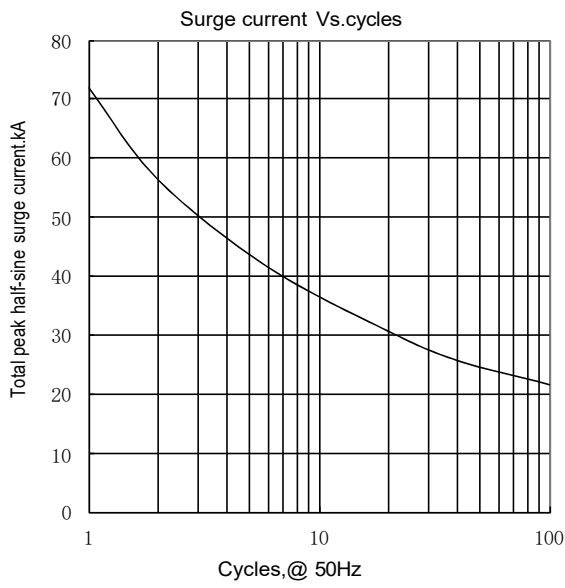


Fig.7

Outline:

