

Features

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

$I_{T(AV)}$	830A
V_{DRM}/V_{RRM}	5600 ~ 6500V
I_{TSM}	11.8 kA
I^2t	696 10³A²S

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T _J (°C)	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled, T _C =70°C	125			830	A
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	tp=10ms	125	5600		6500	V
I_{DRM} I_{RRM}	Repetitive peak current	at V_{DRM} at V_{RRM}	125			200	mA
I_{TSM}	Surge on-state current	10ms half sine wave V _R =0.6V _{RRM}	125			11.8	kA
I^2t	I ² t for fusing coordination					696	A ² s*10 ³
V_{TO}	Threshold voltage		125			1.25	V
r _T	On-state slope resistance					1.03	mΩ
V_{TM}	Peak on-state voltage	I _{TM} =1000A, F=24kN	25			2.40	V
dv/dt	Critical rate of rise of off-state voltage	V _{DM} =0.67V _{DRM}	125			2000	V/μs
di/dt	Critical rate of rise of on-state current	V _{DM} = 67%V _{DRM} to 2000A, Gate pulse tr ≤0.5μs I _{GM} =2.0A	125			100	A/μs
Q _{rr}	Recovery charge	I _{TM} =2000A, tp=4000μs, di/dt=-5A/μs, V _R =100V	125		2500		μC
I _{GT}	Gate trigger current	V _A =12V, I _A =1A	25	40		300	mA
V _{GT}	Gate trigger voltage			0.8		3.0	V
I _H	Holding current			25		200	mA
I _L	Latching current					500	mA
V _{GD}	Non-trigger gate voltage	V _{DM} =0.67V _{DRM}	125			0.3	V
R _{th(j-c)}	Thermal resistance Junction to case	D.C. double side cooled Clamping force 24.0kN				0.020	°C/W
R _{th(c-h)}	Thermal resistance case to heatsink					0.005	°C/W
F _m	Mounting force			19	24	26	kN
T _{vj}	Junction temperature			-40		125	°C
T _{stg}	Stored temperature			-40		140	°C
W _t	Weight				440		g
Outline	P11						

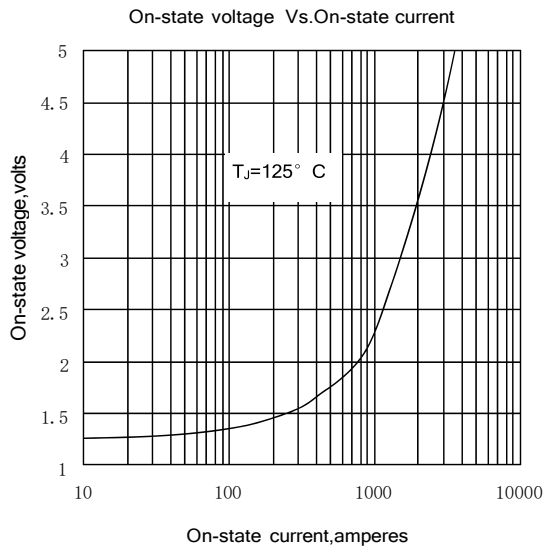


Fig.1

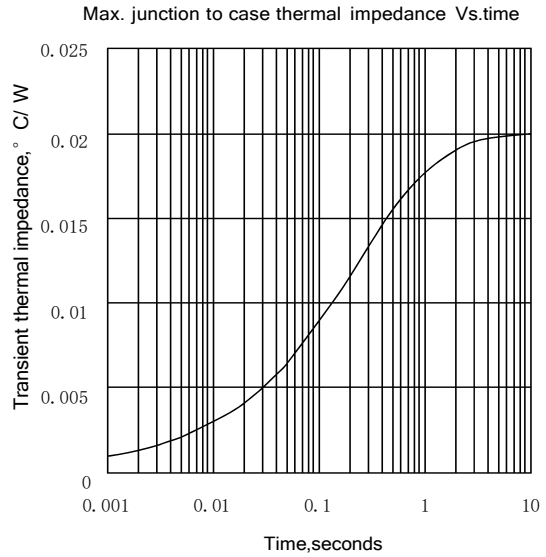


Fig.2

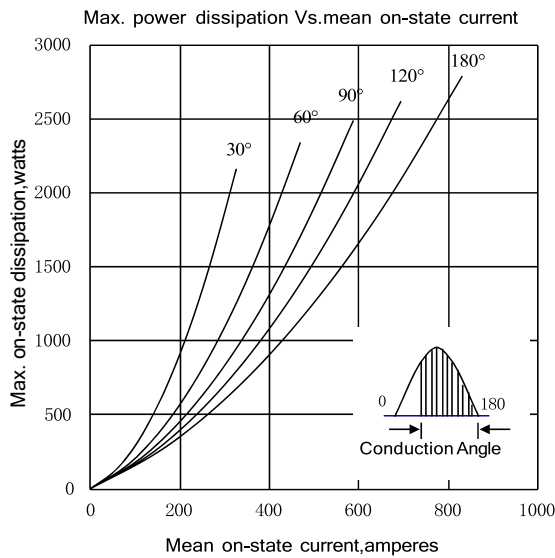


Fig.3

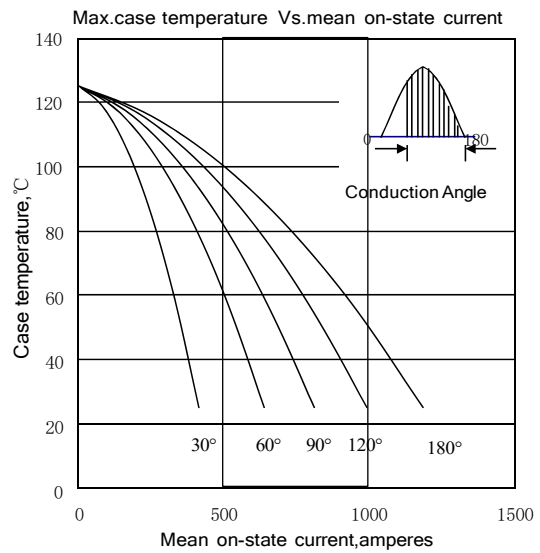


Fig.4

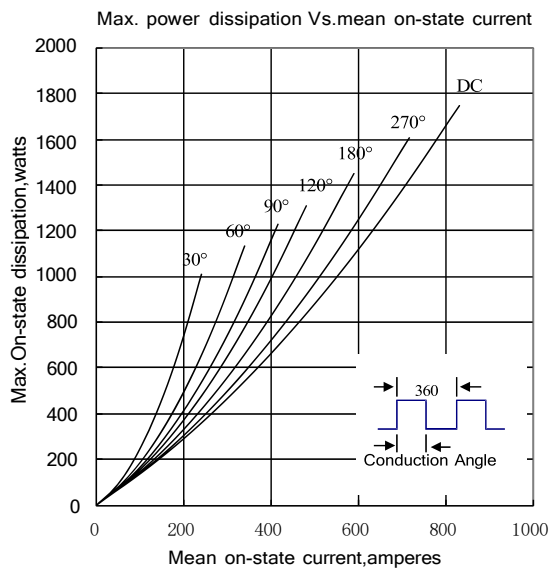


Fig5

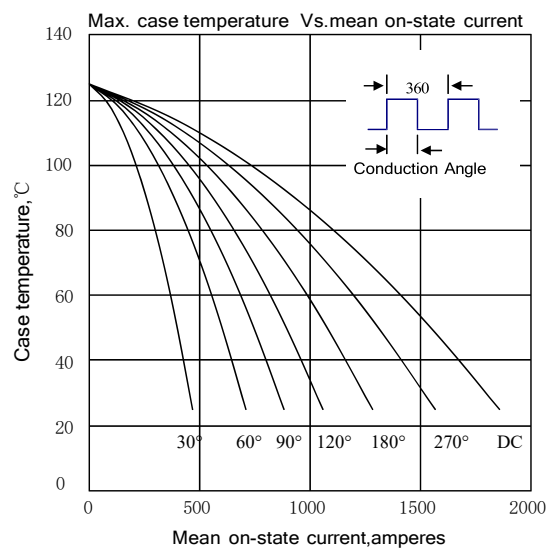


Fig6

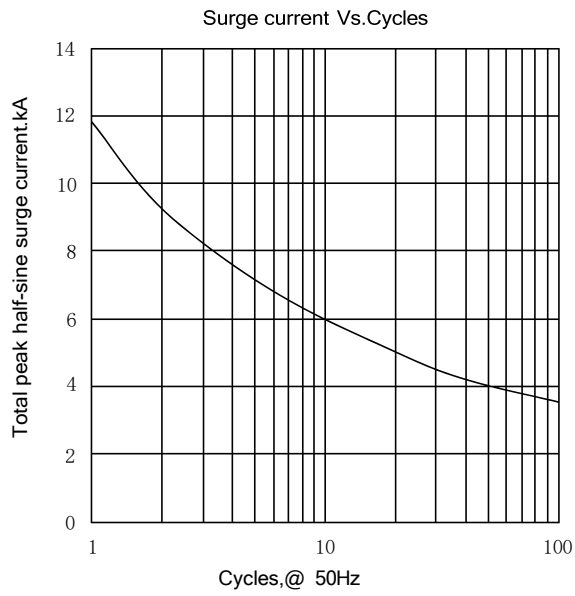


Fig.7


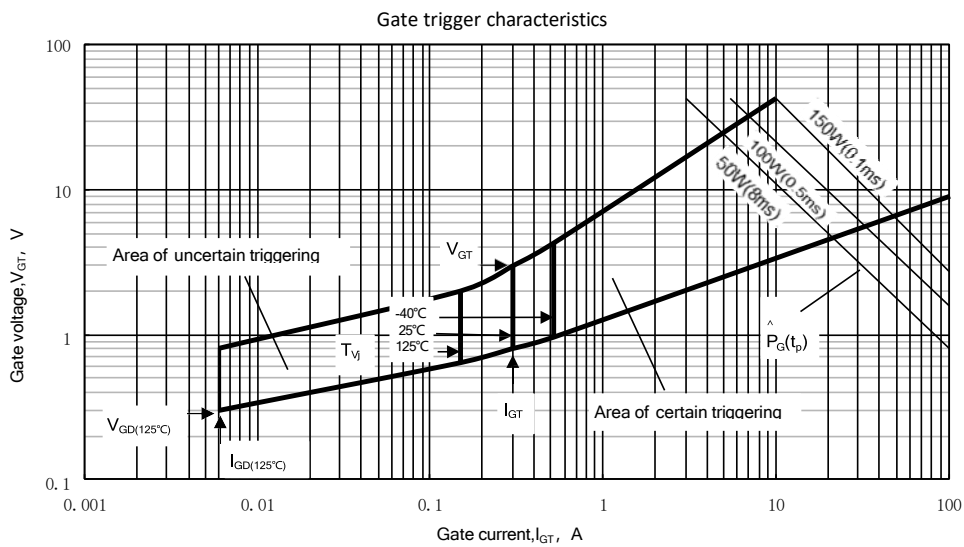


Fig.8

Outline:

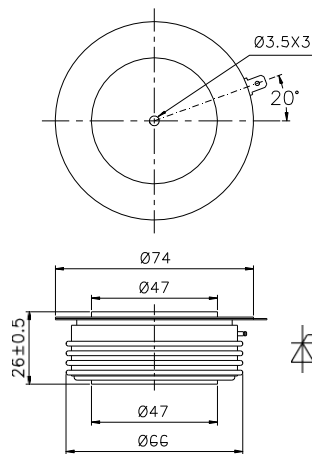

Nlps reserves the right to change specifications without notice.