

Features

- Low forward voltage drop
- High reverse voltage
- Hermetic metal cases with ceramic insulators

$I_{F(AV)}$ 920A
 V_{RRM} 4300V ~ 5000V

Typical Applications

- All purpose high power rectifier diodes
- High power resistance welding equipment
- Non-controllable and half-controllable rectifiers
- Controlled rectifiers

I_{FSM} 8.6 kA
 I^2t 369 10³A²S

SYMBOL	CHARACTERISTIC	TEST CONDITIONS		T _J (°C)	VALUE			UNIT
					Min	Type	Max	
$I_{F(AV)}$	Mean forward current	180° half sine wave 50Hz Double side cooled,	T _C =85°C	150			920	A
V_{RRM}	Repetitive peak reverse voltage	tp=10ms		150	4300		5000	V
I_{RRM}	Repetitive peak current	at V_{RRM}		150			50	mA
I_{FSM}	Surge forward current	10ms half sine wave		150			8.6	kA
I^2t	I^2t for fusing coordination	$V_R=0.6V_{RRM}$						369
V_{FO}	Threshold voltage			150			0.99	V
r_F	Forward slope resistance							0.45
V_{FM}	Peak forward voltage	$I_{FM}=1000A, F=20kHz$		25			2.00	V
Q_{rr}	Recovery charge	$I_{FM}=1000A, tp=4000\mu s, di/dt=-20A/\mu s, V_R=100V$		150		2500		μC
$R_{th(j-c)}$	Thermal resistance Junction to case	D.C. double side cooled Clamping force 15.0kN					0.035	°C/W
$R_{th(c-h)}$	Thermal resistance case to heat sink						0.008	
F_m	Mounting force				10		20	kN
T_{vj}	Junction temperature				-40		150	°C
T_{stg}	Stored temperature				-40		160	°C
W_t	Weight					240		g
Outline	P39							

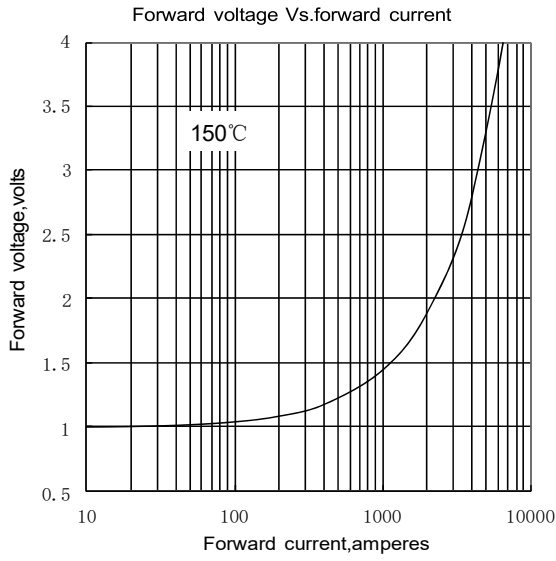


Fig.1

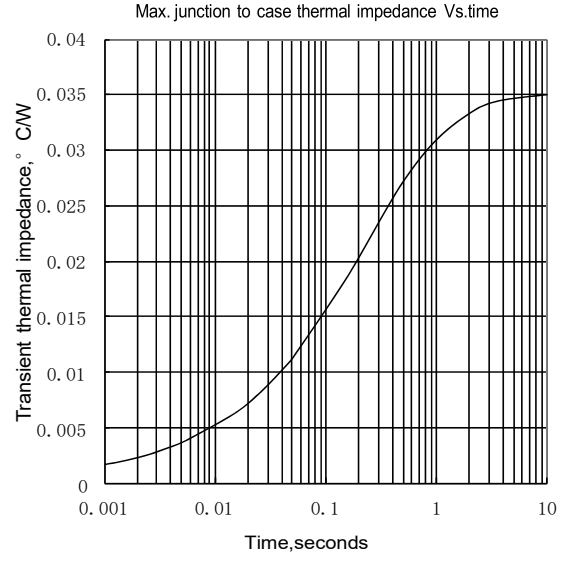


Fig.2

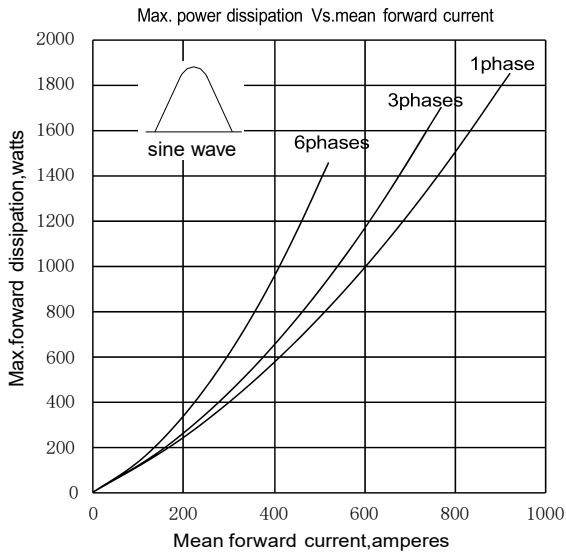


Fig.3

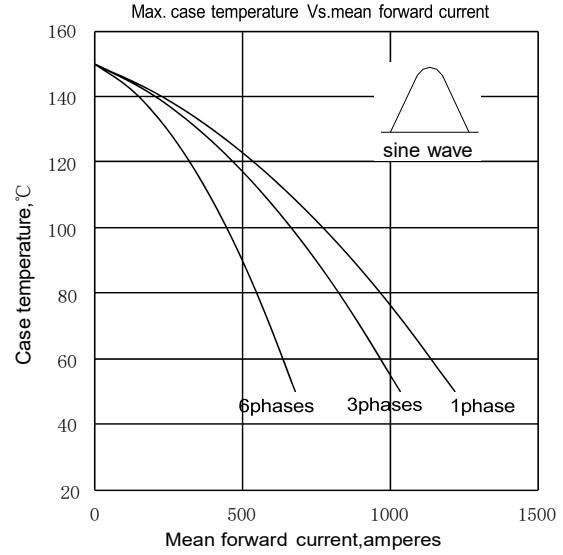


Fig.4

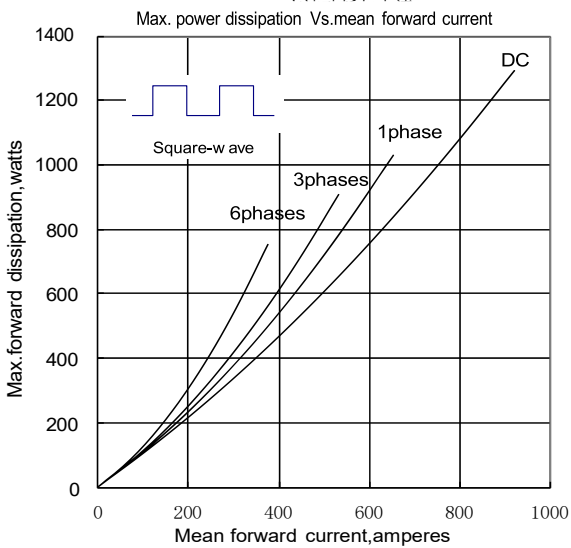


Fig.5

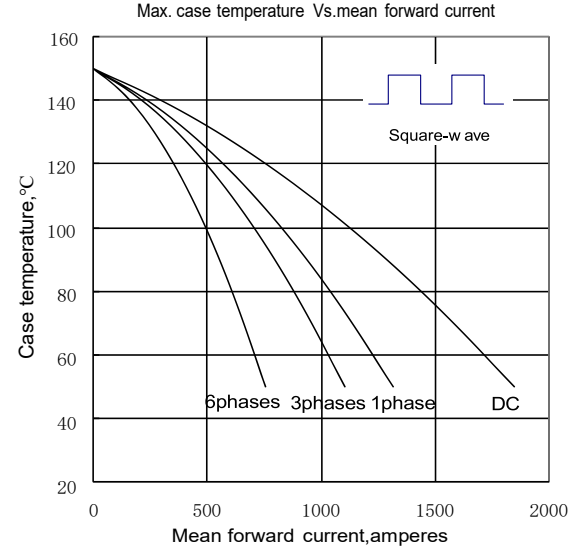


Fig.6

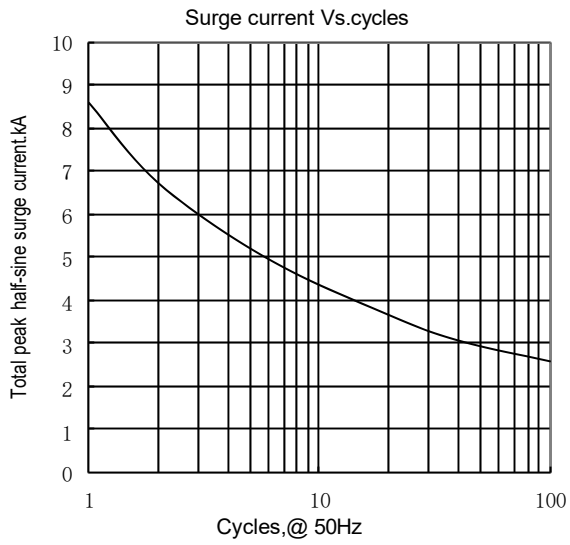


Fig7

Outline:

