

Features

- Low forward voltage drop
- High reverse voltage
- Hermetic metal cases with ceramic insulators

$I_{F(AV)}$ 970A
 V_{RRM} 5600 ~ 6500V

Typical Applications

- All purpose high power rectifier diodes
- High power resistance welding equipment
- Non-controllable and half-controllable rectifiers
- Controlled rectifiers

I_{FSM} 16.5 kA
 I^2t 1361 $10^3 A^2s$

SYMBOL	CHARACTERISTIC	TEST CONDITIONS		$T_j(^{\circ}C)$	VALUE			UNIT
					Min	Type	Max	
$I_{F(AV)}$	Mean forward current	180° half sine wave 50Hz Double side cooled,	$T_c=100^{\circ}C$	150			970	A
V_{RRM}	Repetitive peak reverse voltage	tp=10ms		150	5600		6500	V
I_{RRM}	Repetitive peak current	At V_{RRM}		150			100	mA
I_{FSM}	Surge forward current	10ms half sine wave		150			16.5	kA
I^2t	I^2t for fusing coordination	$V_R=0.6V_{RRM}$						1361
V_{FO}	Threshold voltage			150			0.91	V
r_F	Forward slope resistance							0.60
V_{FM}	Peak forward voltage	$I_{FM}=1500A, F=26kHz$		25			2.15	V
Q_{rr}	Recovery charge	$I_{FM}=1000A, tp=4000\mu s, di/dt=-20A/\mu s, V_R=100V$				3500		μC
$R_{th(j-c)}$	Thermal resistance Junction to case	D.C. Double side cooled Clamping force 26kN					0.022	$^{\circ}C/W$
$R_{th(c-h)}$	Thermal resistance case to heatsink						0.005	
F_m	Mounting force				19		26	kN
T_{vj}	Junction temperature				-40		150	$^{\circ}C$
T_{slg}	Stored temperature				-40		160	$^{\circ}C$
W_t	Weight					440		g
Outline	P42							

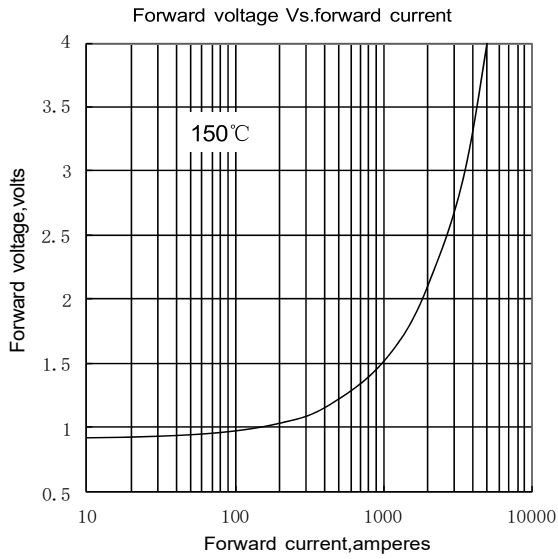


Fig.1

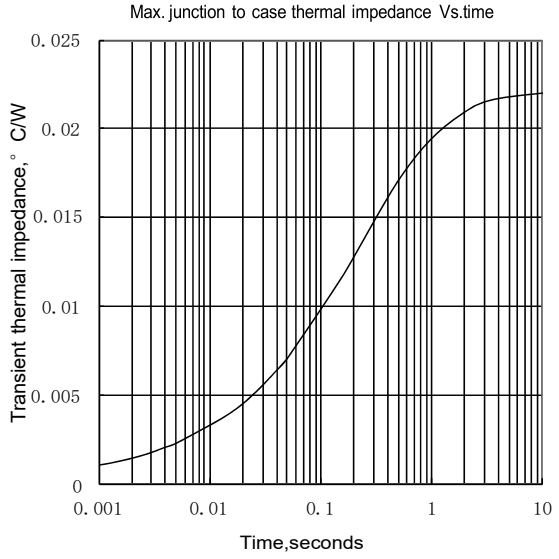


Fig.2

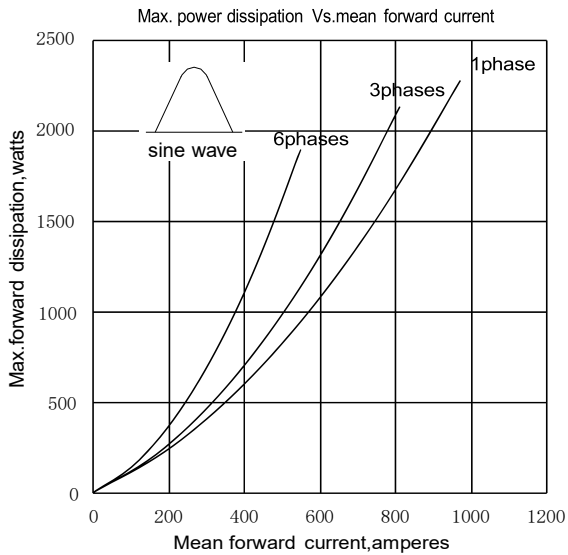


Fig.3

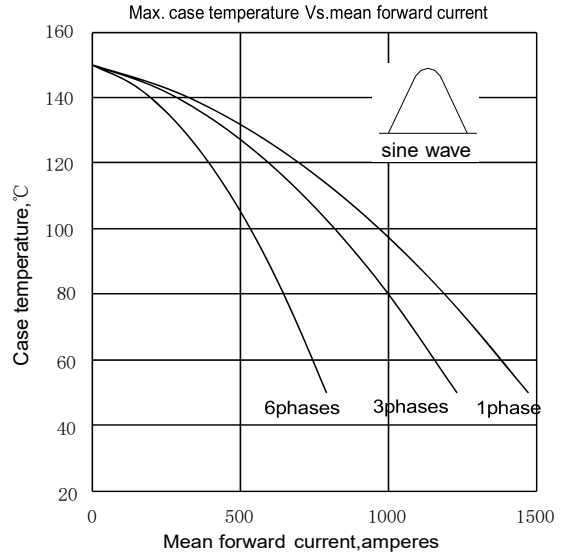


Fig.4

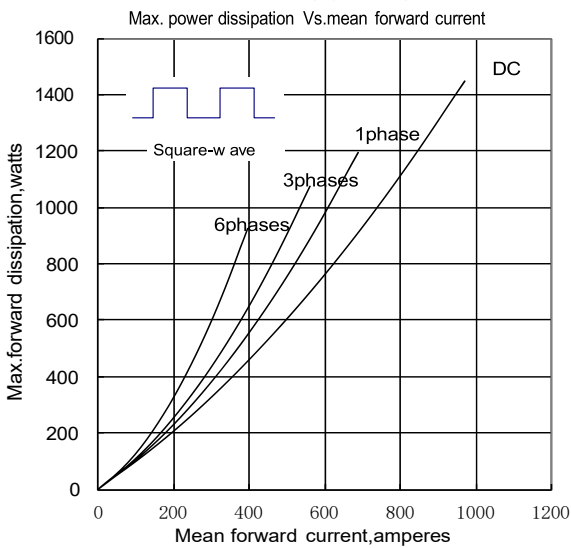


Fig.5

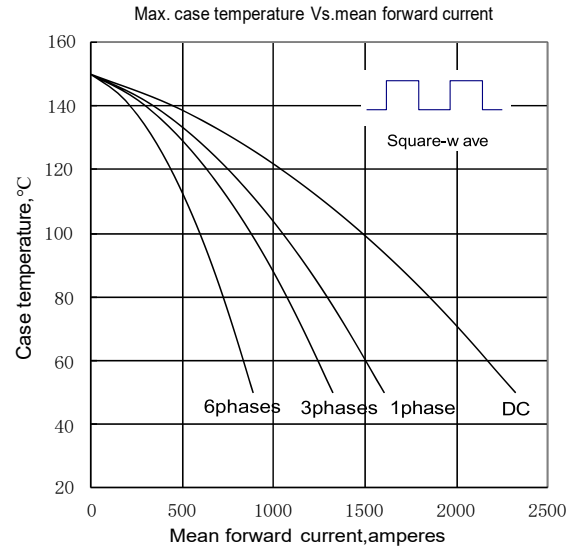


Fig.6

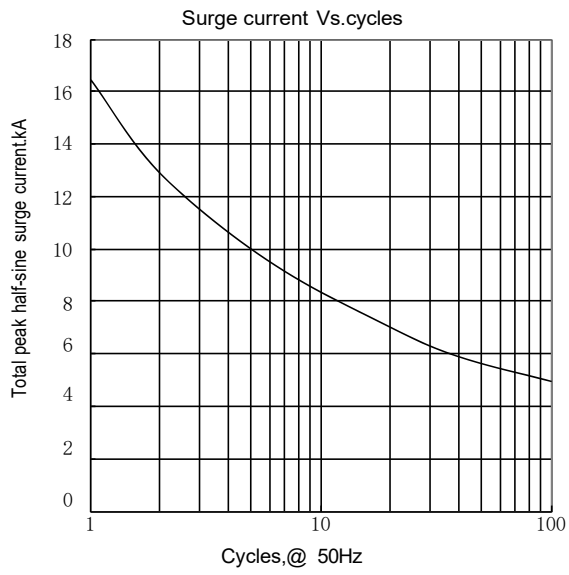


Fig.7

Outline:

