

**Features :**

- Isolated mounting base 3000V~
- Pressure contact technology with Increased power cycling capability
- Space and weight saving

**Typical Applications**

- AC/DC Motor drives
- Various rectifiers
- DC supply for PWM inverter

$V_{DSM}, V_{RSM}$	$V_{DRM}, V_{RRM}$	品名
2100V	2000V	Mx400T200W
2300V	2200V	Mx400T220W
2600V	2500V	Mx400T250W

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_J(^{\circ}C)$	VALUE			UNIT
				Min.	Typ.	Max.	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Single side water cooled, $T_c=55^{\circ}C$	125			400	A
$I_{T(RMS)}$	RMS on-state current					628	A
$I_{DRM}$ $I_{RRM}$	Repetitive peak current	at $V_{DRM}$ at $V_{RRM}$	125			45	mA
$I_{TSM}$	Surge on-state current	10ms half sine wave $V_R=60\%V_{RRM}$	125			11	kA
$I^2t$	$I^2t$ for fusing coordination					605	$A^2s \times 10^3$
$V_{TO}$	Threshold voltage		125			0.82	V
$r_T$	On-state slope resistance					0.79	$m\Omega$
$V_{TM}$	Peak on-state voltage			25		2.18	V
$dv/dt$	Critical rate of rise of off-state voltage	$V_{DM}=67\%V_{DRM}$	125			800	$V/\mu s$
$di/dt$	Critical rate of rise of on-state current	Gate source 1.5A $t_r \leq 0.5\mu s$ Repetitive	125			100	$A/\mu s$
$I_{GT}$	Gate trigger current	$V_A=12V, I_A=1A$	30 25 10			200	mA
$V_{GT}$	Gate trigger voltage			0.8		3.0	V
$I_H$	Holding current					200	mA
$V_{GD}$	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125	0.2			V
$R_{th(j-c)}$	Thermal resistance Junction to case	D.C. Single side cooled, per chip.				0.11	$^{\circ}C / W$
$R_{th(c-h)}$	Thermal resistance case to heat sink	D.C. Single side cooled, per chip.				0.04	$^{\circ}C / W$
$V_{iso}$	Isolation voltage	50Hz,R.M.S., $t=1min, I_{iso}:1mA(MAX)$		3000			V
$F_m$	Terminal connection torque(M8)				12.0		N·m
	Mounting torque(M6)				6.0		N·m
$T_{vj}$	Junction temperature			-40		125	$^{\circ}C$
$T_{stg}$	Stored temperature			-40		125	$^{\circ}C$
$W_t$	Weight				1055		g
Outline		M13					

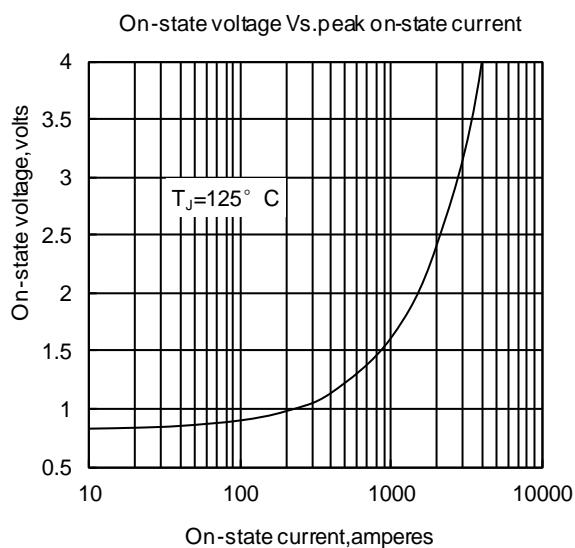


Fig1

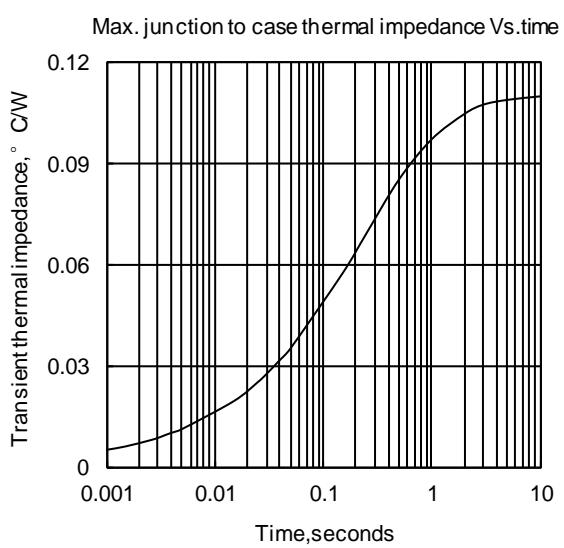


Fig2

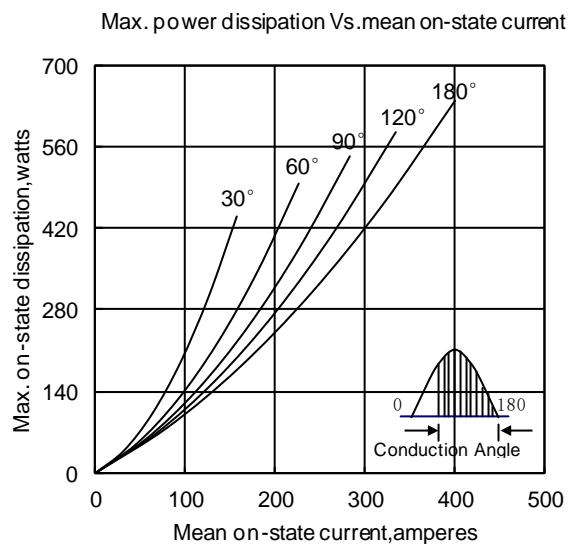


Fig3

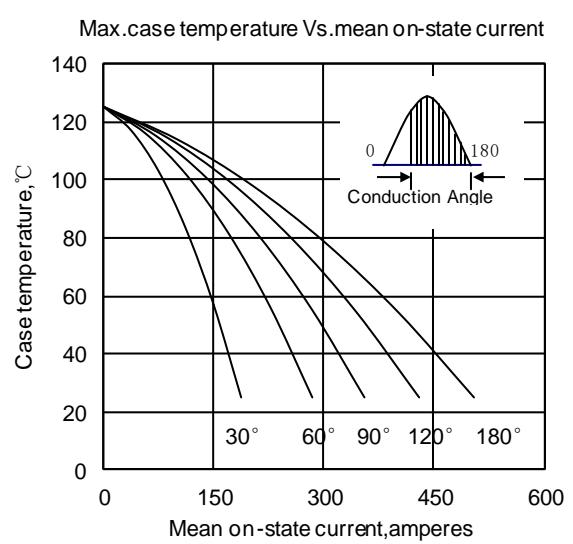


Fig4

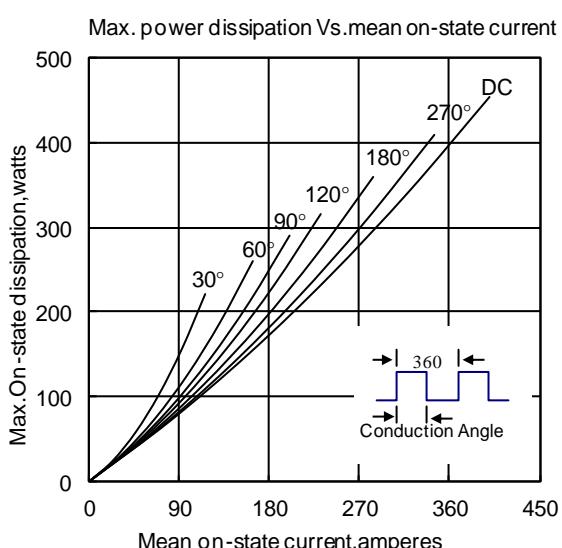


Fig5

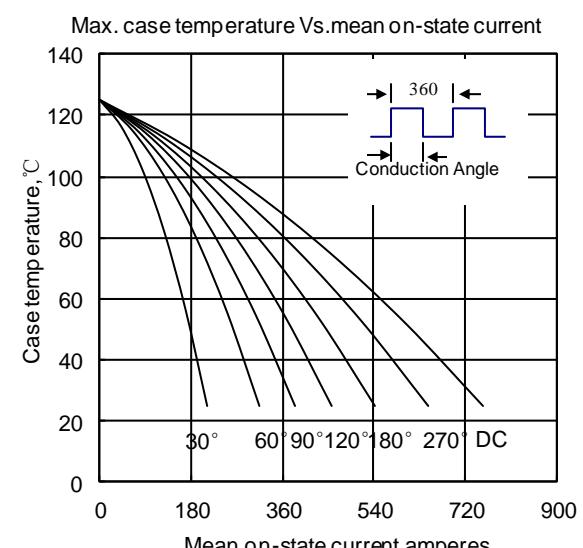


Fig6

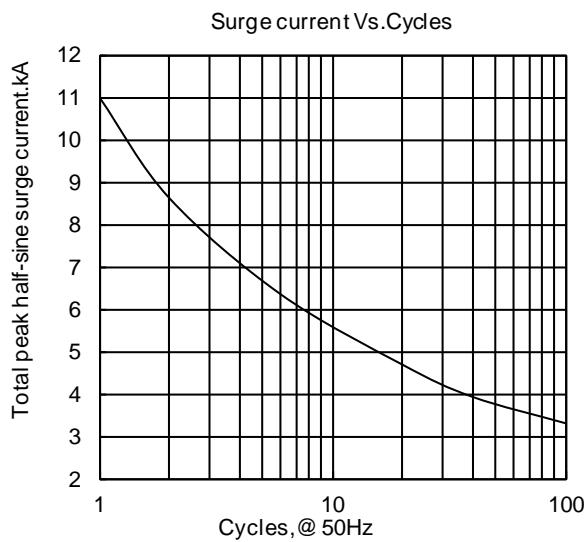


Fig 7

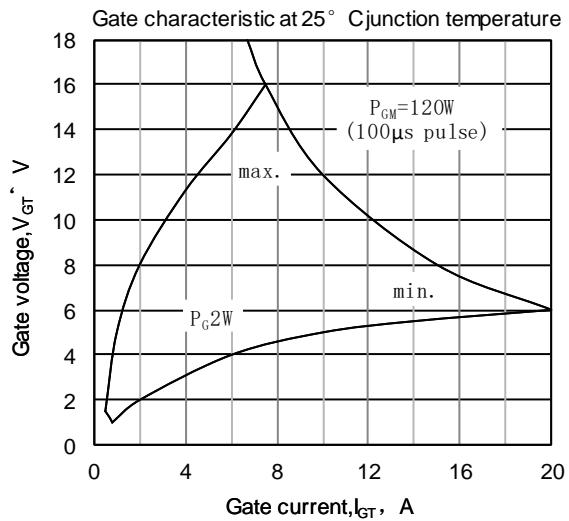


Fig 8


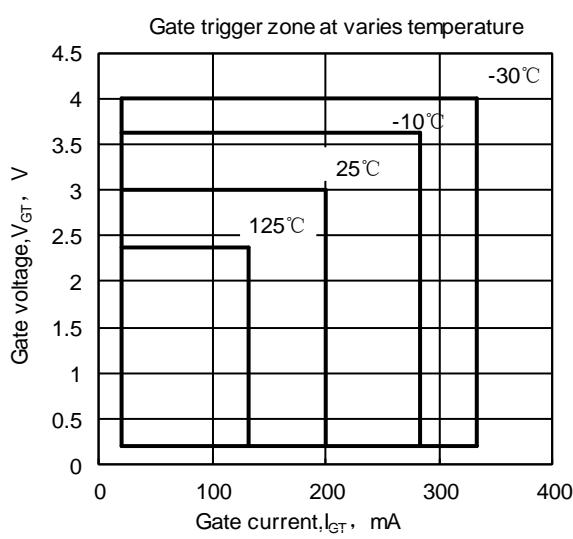



Fig 9

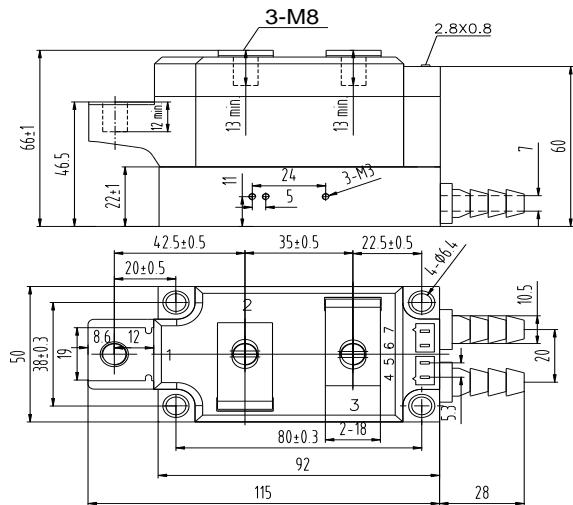

MD400T\*\*W

MR400T\*\*W

MC400T\*\*W

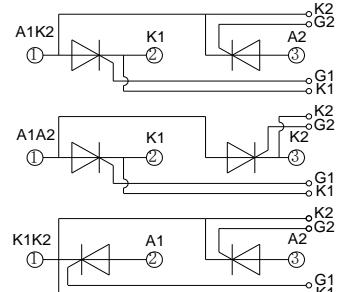

Unmarked dimensional tolerance :  $\pm 0.5\text{mm}$