

#### Features

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

#### Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

$I_{T(AV)}$       **2800 A**  
 $V_{DRM}/V_{RRM}$     **5600-6500V**  
 $I_{TSM}$             **45 kA**  
 $I^2t$                 **10130 10<sup>3</sup>A<sup>2</sup>S**



SYMBOL	CHARACTERISTIC	TEST CONDITIONS		T <sub>j</sub> (°C)	VALUE			UNIT
					Min	Type	Max	
I <sub>T(AV)</sub>	Mean on-state current	180° half sine wave 50Hz Double side cooled,	T <sub>C</sub> =70°C	125			2800	A
V <sub>DRM</sub> V <sub>RRM</sub>	Repetitive peak off-state voltage Repetitive peak reverse voltage	tp=10ms		125	5600		6500	V
I <sub>DRM</sub> I <sub>RRM</sub>	Repetitive peak current	at V <sub>DRM</sub> at V <sub>RRM</sub>		125			600	mA
I <sub>TSM</sub>	Surge on-state current	10ms half sine wave V <sub>R</sub> =0.6V <sub>RRM</sub>		125			45	kA
I <sup>2</sup> t	I <sup>2</sup> t for fusing coordination						10130	A <sup>2</sup> s*10 <sup>3</sup>
V <sub>TO</sub>	Threshold voltage			125			1.14	V
r <sub>T</sub>	On-state slope resistance						0.27	mΩ□
V <sub>TM</sub>	Peak on-state voltage	I <sub>TM</sub> =3000A, F=90kN		125			2.0	V
dv/dt	Critical rate of rise of off-state voltage	V <sub>DM</sub> =0.67V <sub>DRM</sub>		125			2000	V/μs
di/dt	Critical rate of rise of on-state current	V <sub>DM</sub> = 67%V <sub>DRM</sub> to 3000A, Gate pulse tr ≤0.5μs IGM=1.5A		125			250	A/μs
Q <sub>rr</sub>	Recovery charge	I <sub>TM</sub> =2000A, tp=2000μs, di/dt=-5A/μs, V <sub>R</sub> =50V		125		5000		μC
I <sub>GT</sub>	Gate trigger current			25	40		300	mA
V <sub>GT</sub>	Gate trigger voltage	V <sub>A</sub> =12V, I <sub>A</sub> =1A			0.8		3.0	V
I <sub>H</sub>	Holding current				25		250	mA
V <sub>GD</sub>	Non-trigger gate voltage	V <sub>DM</sub> =67%V <sub>DRM</sub>		125	0.3			V
R <sub>th(j-c)</sub>	Thermal resistance Junction to case	At 180° sine' double side cooled					0.0057	°C/W
R <sub>th(c-h)</sub>	Thermal resistance case to heatsink	Clamping force 90kN					0.0015	°C/W
F <sub>m</sub>	Mounting force				81	90	108	kN
T <sub>stg</sub>	Stored temperature				-40		140	°C
W <sub>t</sub>	Weight					2500		g
Outline								

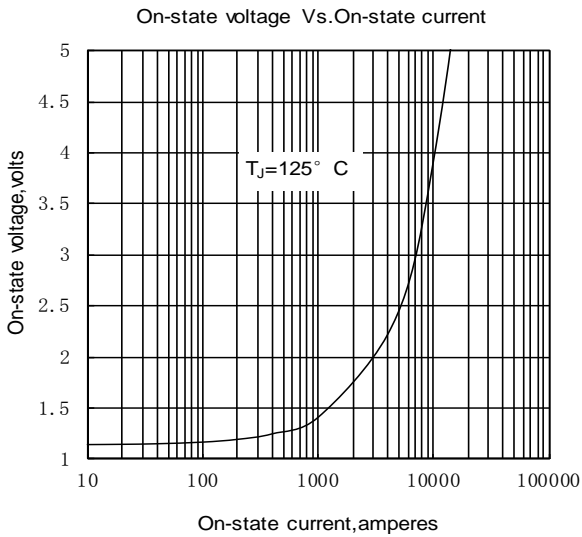


Fig.1

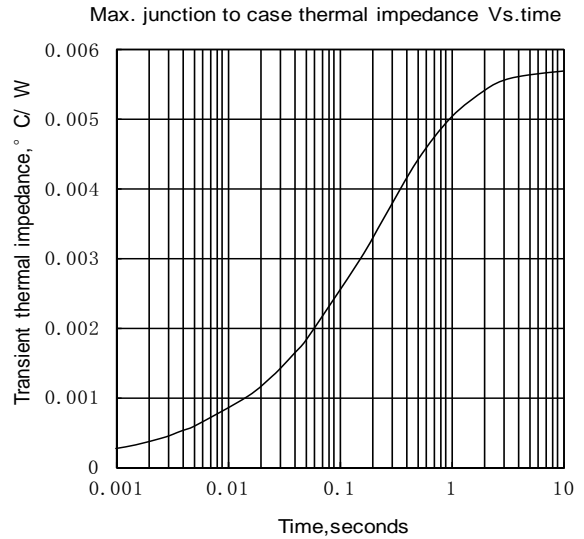


Fig.2

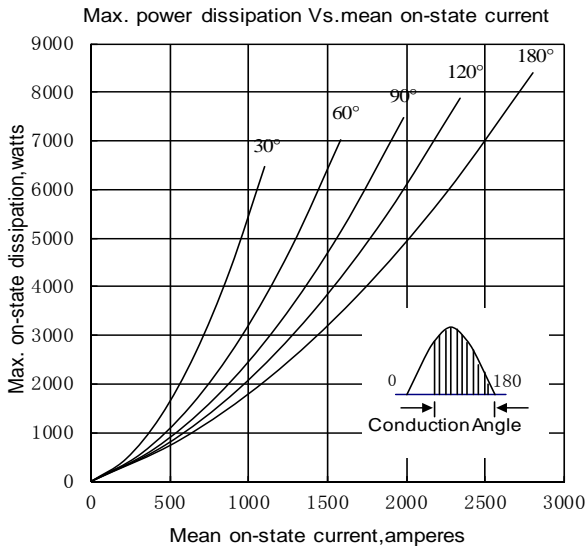


Fig.3

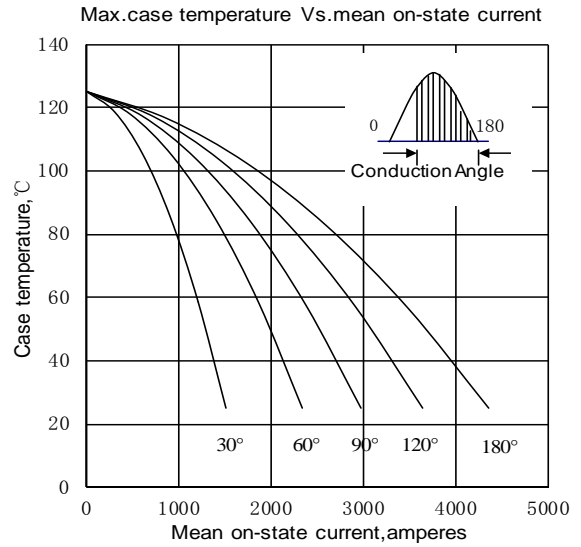


Fig.4

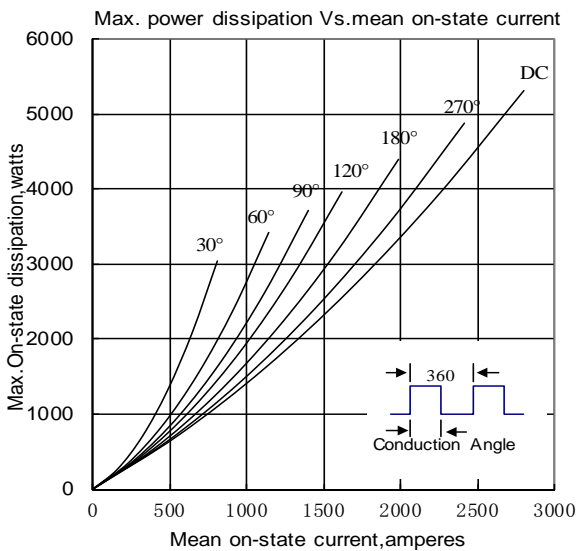


Fig.5



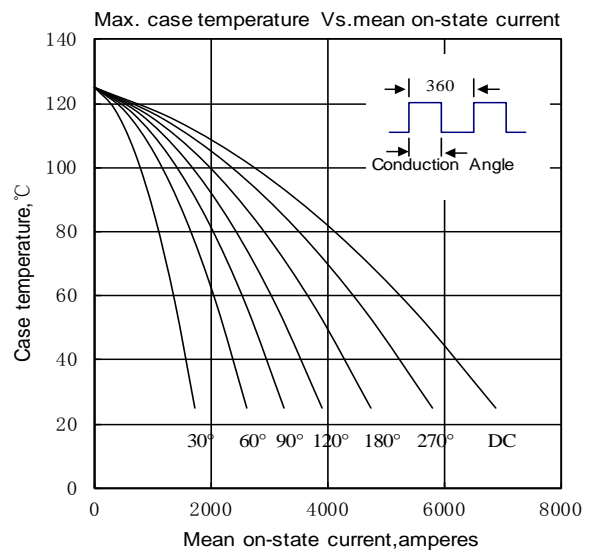



Fig.6

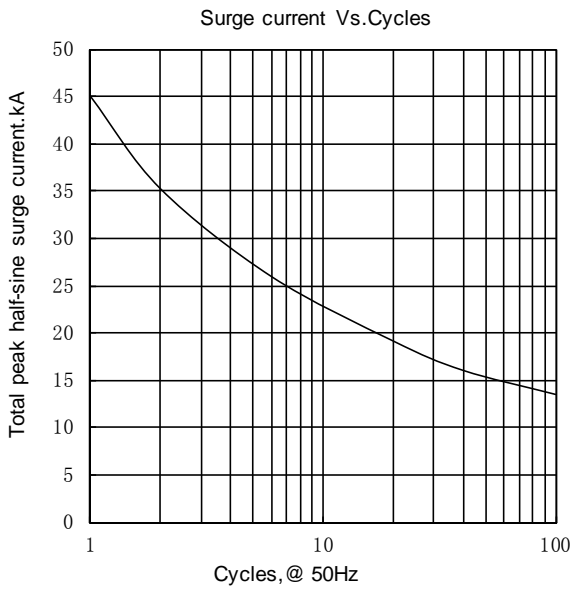


**Fig.7**

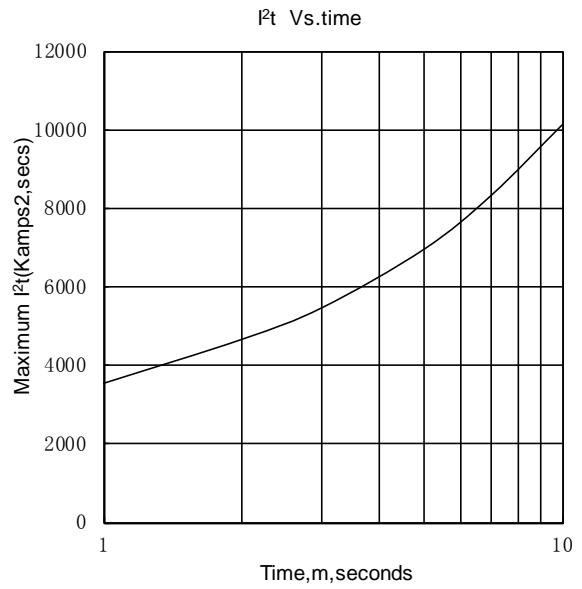

**Fig.8**

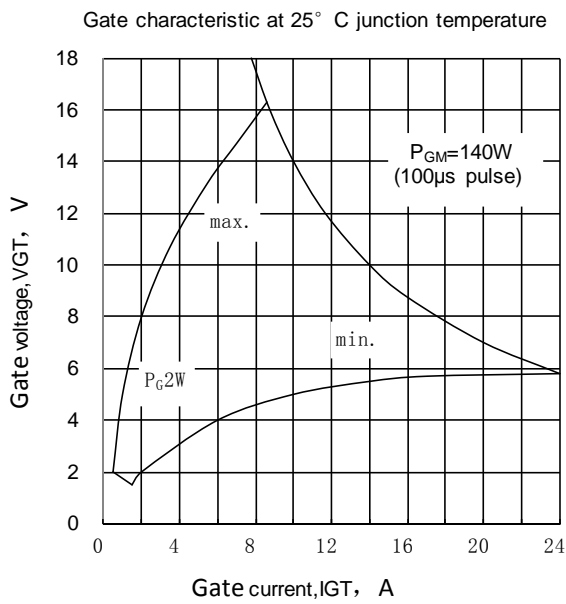

**Fig.9**

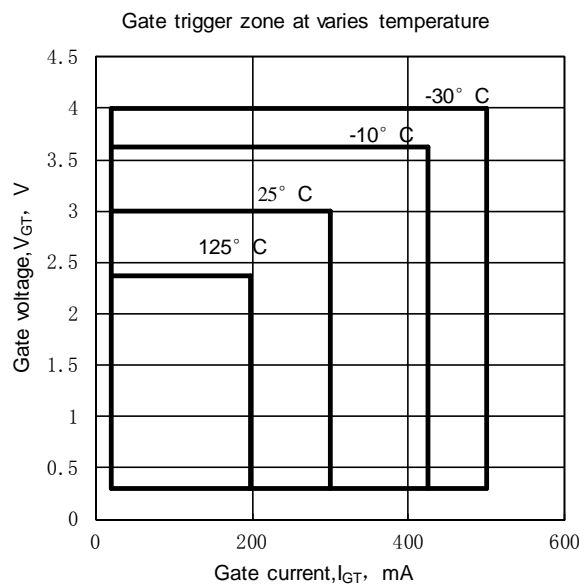

**Fig.10**

**Outline:**

